



ANUGRAH MEMORIAL COLLEGE, GAYA

A Constituent Unit of Magadh University, Bodh-Gaya

**Department of Computer Application
and Information Technology**

LINUX PROGRAMMING

LECTURE NOTES

**BCA & B.Sc. (IT)
(1st Year) (2024-27)**

PREPARED BY:

Mr. Prince Kumar

Assistant Professor

Anugrah Memorial College, Gaya
Dept. of Computer Application & Information Technology

Name of the Subject: LINUX PROGRAMMING

SUBJECTCODE: Paper-II

Programme : UG

Branch : CS/ IT

Year : 1st

Mentor BY:

Name: Dr. Neeraj Kumar Kamal

Design: Coordinator (Computer Science & Information Technology)

Name: Malay Kumar

Design: Assistant. Professor

Name: Gautam Kumar

Design: Assistant. Professor

Name: Nidhi Kanchan

Design: Assistant. Professor

Syllabus

UNIT I

Linux Utilities - File handling utilities, Security by file permissions, Process utilities, Disk utilities, Networking commands, Filters, Text processing utilities and Backup utilities. Sed- Scripts, Operation, Addresses, Commands, Applications, awk- Execution, Fields and Records, Scripts, Operation, Patterns, Actions, Associative Arrays, String and Mathematical functions, System commands in awk, Applications.

Shell programming with Bourne again shell (bash) - Introduction, shell responsibilities, pipes and Redirection, here documents, running a shell script, the shell as a programming language, shell meta characters, file name substitution, shell variables, command substitution, shell commands, the environment, quoting, test command, control structures, arithmetic in shell, shell script examples, interrupt processing, functions, debugging shell scripts.

UNIT II

Files and Directories- File Concept, File types, File System Structure, file metadata-Inodes, kernel support for files, **system calls for file I/O operations**- open, create, read, write, close, lseek, dup2, file status information-stat family, file and **record locking**-lockf and fcntl functions, **file permissions** - chmod, fchmod, file ownership-chown, lchown, fchown, **links soft links and hard links** – symlink, link, unlink.

Directories - Creating, removing and changing Directories-mkdir, rmdir, chdir, obtaining current working directory-getcwd, Directory contents, Scanning Directories-opendir, readdir, closedir, rewinddir, seekdir, telldir functions.

UNIT III

Process – Process concept, Kernel support for process, process identification, process hierarchy, process states, process control - process creation, waiting for a process, process termination, zombie process, orphan process, system call interface for process management-fork, vfork, exit, wait, waitpid, exec family, system, I/O redirection

Signals – Introduction to signals, Signal generation and handling, Kernel support for signals, Signal function, unreliable signals, reliable signals, kill, raise, alarm, pause, abort, sleep functions.

UNIT IV

Inter process Communication - Introduction to IPC, IPC between processes on a single computer system, IPC between processes on different systems, pipes-creation, IPC between related processes using unnamed pipes, FIFOs-creation, IPC between unrelated processes using FIFOs (Named pipes), differences between unnamed and named pipes, popen and pclose library functions.

Message Queues- Kernel support for messages, APIs for message queues, client/server example.

Semaphores - Kernel support for semaphores, APIs for semaphores, file locking with semaphores.

UNIT V

Shared Memory- Kernel support for shared memory, APIs for shared memory, shared memory example.

Sockets- Introduction to Berkeley Sockets, IPC over a network, Client-Server model, Socket address structures (Unix domain and Internet domain), Socket system calls for connection oriented protocol and connectionless protocol, **example**-client/server programs-Single Server-Client connection, Multiple simultaneous clients, Comparison of IPC mechanisms.

TEXT BOOKS:

1. UnixSystemProgrammingusingC++,T.Chan,PHI.
2. UnixConceptsandApplications,4thEdition,SumitabhaDas,TMH,2006.
3. UnixNetworkProgramming,W.R.Stevens,PHI

REFERENCEBOOKS:

1. LinuxSystemProgramming,RobertLove,O'Reilly,SPD,rp-2007.
2. Unixforprogrammersandusers,3rdEdition,GrahamGlass,KingAbles,Pearson2003,
3. AdvancedProgrammingintheUnixenvironment,2ndEdition,W.R.Stevens,Pearson.
4. SystemProgrammingwithCandUnix,A.Hoover, Pearson.

DEPARTMENT OF COMPUTER SCIENCE AND I.T.

Vision

- To acknowledge quality education and instill high patterns of discipline making the students technologically superior and ethically strong which involves the improvement in the quality of life in human race.

Mission

- To achieve and impart holistic technical education using the best of infrastructure, outstanding technical and teaching expertise to establish the students into competent and confident engineers.
- Evolving the center of excellence through creative and innovative teaching learning practices for promoting academic achievement to produce internationally accepted competitive and world class professionals.

Course Objectives & Outcomes

Course Objectives

- To develop the skills necessary for Unix systems programming including filesystem programming, process and signal management, and interprocess communication.
- To make effective use of Unix utilities and Shell scripting languages such as bash.
- To develop the basic skills required to write network programs using Sockets.

Course Outcomes

After Completion of this course Students will be able to

- Students will be able to use Linux environment efficiently
- Solve problems using bash for shell scripting
- Work confidently in Unix/Linux environment

"Unit-I-LinuxUtilities"

IntroductiontoLinux

Linux is a Unix-like computer operating system assembled under the model of free and opensource software development and distribution. The defining component of Linux is the Linuxkernel, an operating system kernel first released 5 October 1991 by Linus Torvalds.

A distribution oriented toward desktop use will typically include the X Window System and an accompanying desktop environment such as GNOME or KDE Plasma. Some such distributions may include a less resource intensive desktop such as LXDE or Xfce for use on older or less powerful computers. A distribution intended to run as a server may omit all graphical environments from the standard install and instead include other software such as the ApacheHTTP Server and an SSH server such as OpenSSH. Because Linux is freely redistributable, anyone may create a distribution for any intended use. Applications commonly used withdesktop Linux systems include the Mozilla Firefox web browser, the LibreOffice office application suite, and the GIMP image editor.

History

The Unix operating system was conceived and implemented in 1969 at AT&T's BellLaboratories in the United States by Ken Thompson, Dennis Ritchie, Douglas McIlroy, and JoeOssanna. It was first released in 1971 and was initially entirely written in assembly language, a common practiceat thetime. Later,in akeypioneeringapproach in 1973, Unix was re-writtenin the programming language C by Dennis Ritchie (with exceptions to the kernel and I/O). The availability of an operating system written in a high-level language allowed easier portability to different computer platforms.

Programmingon Linux

Most Linux distributions support dozens of programming languages. The original development tools used for building both Linux applications and operating system programs are found within the GNU toolchain, which includes the GNU Compiler Collection (GCC) and the GNU buildsystem. Amongst others, GCC provides compilers for Ada,C,C++,Java, and Fortran.

Most distributions also include support for PHP, Perl, Ruby,Python and other dynamiclanguages. While not as common, Linux also supports C# (via Mono), Vala, and Scheme. A number of Java Virtual Machines and development kits run on Linux, including the original Sun Microsystems JVM (HotSpot), and IBM's J2SE RE, as well as many open-source projects like Kaffe and JikesRVM.

LinuxAdvantages

1. **Lowcost:** Youdon,,tneedtospendtimeandmoneytoobtainlicensessinceLinuxand much of its software come with the GNU General Public License
2. **Stability:** Linuxdoesn,,tneedtoberebootedperiodicallytomaintainperformancelevels.
3. **Performance:** Linuxprovidespersistenthighperformanceonworkstationsandon networks..
4. **Networkfriendliness:** Itcanperformtaskssuchasnetworkbackupsfasterandmore reliably than alternative systems.
5. **Flexibility:** Linuxcanbeusedforhighperformanceserverapplications,desktopapplications, and embedded systems.

-
6. **Compatibility:** It runs all common Unix software packages and can process all common file formats.
 7. **Choice:** The large number of Linux distributions gives you a choice.
 8. **Fast and easy installation:** Most Linux distributions come with user-friendly installation and setup programs.
 9. **Full use of hard disk:** Linux continues to work well even when the hard disk is almost full.
 10. **Multitasking:** Linux is designed to do many things at the same time; e.g., a large printing job in the background won't slow down your other work.
 11. **Security:** Linux is one of the most secure operating systems. — Walls and flexible file access permission systems prevent access by unwanted visitors or viruses.
 12. **Open Source:** If you develop software that requires knowledge or modification of the operating system code, Linux's source code is at your fingertips.

The difference between Linux and UNIX operating systems

UNIX is a copyrighted name only big companies are allowed to use the UNIX copyright and name, so IBM AIX and Sun Solaris and HP-UX all are UNIX operating systems. The [OpenGroup](#) holds the UNIX trademark in trust for the industry, and manages the UNIX trademark licensing program. Most UNIX systems are commercial in nature.

Linux is a UNIX Clone

But if you consider Portable Operating System Interface (POSIX) standards then Linux can be considered as UNIX. To quote from Official Linux kernel README file:

Linux is a Unix clone written from scratch by Linus Torvalds with assistance from a loosely-knit team of hackers across the Net. It aims towards POSIX compliance.

Linux Is Just a Kernel

Linux is just a kernel. All Linux distributions include GUI system + GNU utilities (such as cp, mv, ls, date, bash etc) + installation & management tools + GNU C/C++ Compilers + Editors (vi) + and various applications (such as OpenOffice, Firefox).

License and cost

Linux is Free (as in beer [freedom]). You can download it from the Internet or redistribute it under GNU licenses.

User-Friendly


Security Firewall Software

Backup and Recovery Software

UNIX and Linux come with different sets of tools for backing up data to tape and other backup media. However, both of them share some common tools such as tar, dump/restore, and cpio etc.

File Systems

- Linux by default supports and uses ext3 or ext4 file systems.
- UNIX comes with various file systems such as jfs, gpfs (AIX), jfs, gpfs (HP-UX), jfs, gpfs (Solaris).

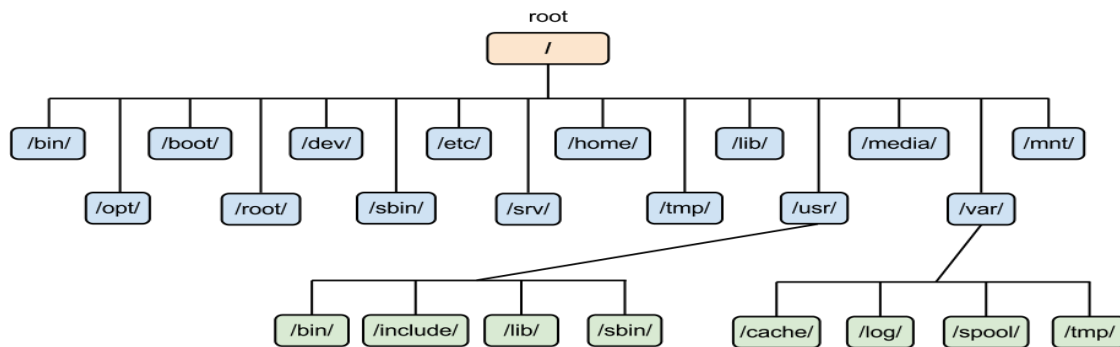

SystemAdministration Tools

1. UNIXcomeswithitsown toolssuchasSAMonHP-UX.
2. SuseLinux comeswithYast
3. RedhatLinux comeswithitsownguitoolscaledredhat-config-*

However,editingtextconfigfileandtypingcommandsaremostpopularoptionsforsysadmin work under UNIX and Linux.

UNIXOperatingSystemNames

Afewpopular names:

1. HP-UX
2. IBMAIX
3. Sun Solairs
4. MacOSX
5. IRIX

LinuxDistributionNames

Afewpopular names:

- 1.RedhatEnterprise Linux
- 2.FedoraLinux
- 3.DebianLinux
- 4.SuseEnterpriseLinux
- 5.Ubuntu Linux

FundamentaldifferencesbetweenLinuxandWindows #1:

Full access vs. no access

#2:Licensingfreedomvs.licensing restrictions

#3:Onlinepeersupportvs.paidhelp-desksupport #4:

Full vs. partial hardware support

#5:Commandlinevs.nocommandline #7:

Flexibility vs. rigidity

#8:Fanboysvs.corporatetypes

#9:Automatedvs.nonautomatedremovablemedia

#10:Multilayeredrunlevelsvs.asingle-layeredrunlevel

FileHandlingutilities:

cat COMMAND:

catlinuxcommandconcatenatesfilesandprintitonthestandardoutput.

SYNTAX:

OPTIONS:

-A	Showall.
-b	Omitslinenumbers forblankspaceintheoutput.
-e	A\$ characterwill beprinted attheendof each linepriorto anew line.
-E	Displaysa\$ (dollarsign) at theendofeach line.
-n	Linenumbersfor alltheoutput lines.
-s	Ifthe outputhas multipleemptylinesit replacesitwithone emptyline.
-T	Displaysthetab charactersintheoutput.
-v	Non-printingcharacters(withtheexceptionoftabs,new-linesandform-feeds) are printed visibly.

EXAMPLE:

1. To Create a newfile:
`cat>file1.txt`
Thiscommandcreatesanewfilefile1.txt.Aftertypingintothe filepresscontrol+d (^d) simultaneously to end the file.
2. To Append data into thefile:
`cat>>file1.txt`
Toappenddataintothesamefileuseappendoperator>>to writeintothe file,else the file will be overwritten (i.e., all of its contents will be erased).
3. To display a file:
`cat file1.txt`
Thiscommand displaysthe datain the file.
4. To concatenate several files and display:
`cat file1.txt file2.txt`
The above cat command will concatenate the two files (file1.txt and file2.txt) and it will display the output in the screen. Some times the output may not fit the monitor screen. In such situation you can print those files in a new file or display the file using less command.
`cat file1.txt file2.txt |less`
5. To concatenate several files and to transfer the output to another file. `cat file1.txt file2.txt > file3.txt`
In the above example the output is redirected to new file file3.txt. The cat command will create new file file3.txt and store the concatenated output into file3.txt.

rmCOMMAND:

rm linux command is used to remove/delete the file from the directory.

SYNTAX:

The syntax is `rm[options..] [file |directory]`

OPTIONS:

-f	Remove all files in a directory without prompting the user.
-i	Interactive. With this option, rm prompts for confirmation before removing any files.
-r(or)-R	Recursively remove directories and subdirectories in the argument list. The directory will be emptied of files and removed. The user is normally prompted for removal of any write-protected files which the directory contains.

1. To Remove/Delete a file: **rm file1.txt**
Here rm command will remove/delete the file file1.txt.
2. To delete a directory tree: **rm -ir tmp**
This rm command recursively removes the contents of all subdirectories of the tmp directory, prompting you regarding the removal of each file, and then removes the tmp directory itself.
3. To remove more files at once **rm file1.txt file2.txt**
rm command removes file1.txt and file2.txt files at the same time.

cd COMMAND:

cd command is used to change the directory.

SYNTAX:

The

Syntax is

cd [directory|~|./|../|-]

OPTIONS:

-L	Use the physical directory structure.
-P	Force symbolic links.

1. **cd linux-command**
This command will take you to the sub-directory (linux-command) from its parent directory.
2. **cd..**
This will change to the parent-directory from the current working directory/sub-directory.
3. **cd~**
This command will move to the user's home directory which is "/home/username".

cp COMMAND:

cp command copy files from one location to another. If the destination is an existing file, then the file is overwritten; if the destination is an existing directory, the file is copied into the directory (the directory is not overwritten).

SYNTAX:

The

Syntax

cp[OPTIONS]...SOURCEDEST
cp[OPTIONS]...SOURCE...DIRECTORY
cp[OPTIONS]...--target-directory=DIRECTORYSOURCE...

OPTIONS:

-a	sameas-dpR.
-- backup[=CONTROL]	makeabackup ofeachexistingdestination file
-b	like--backupbutdoesnotacceptanargument.
-f	ifanexistingdestinationfilecannotbeopened,removeitandtry again
-p	sameas--preserve=mode,ownership,timestamps.
-- preserve[=ATTR_LIST]	preserve the specified attributes (default: mode,ownership,timestamps) and security contexts, if possible additional attributes: links, all.
--no- preserve=ATTR_LIST	don'tpreservethespecifiedattribute.
--parents	appendsourcepathto DIRECTORY.

EXAMPLE:

1. Copytwo files:
cpfile1
file2
Theabove cp commandcopies thecontentoffile1.phpto file2.php.
2. To backup the copied file: cp -b
file1.phpfile2.php
Backupoffile1.phpwillbecreatedwith'~'symbolas file2.php~.
3. Copy folder and subfolders:cp-R
scripts scripts1
Theabove cp commandcopythefolderand subfoldersfrom scriptsto scripts1.

ls COMMAND:

lscommandliststhefilesanddirectoriesunder currentworkingdirectory.

SYNTAX:

TheSyntax is

ls[OPTIONS]...[FILE]

OPTIONS:

-l	Listallthefiles,directoriesandtheirmode,Numeroflinks,ownerofthe file, file size, Modified date and time and filename.
-t	Listsinorderoflastmodificationtime.
-a	Listallentries includinghidden files.
-d	Listsdirectoryfilesinstead of contents.

-p	Put slash at the end of each directory.
-u	List in order of last access time.
-i	Display inode information.
-ltr	List files in order by date.
-lsr	List files in order by file size.

EXAMPLE:

1. Display root directory
contents: `ls /`
lists the contents of root directory.
2. Display hidden files and directories: `ls -a`
lists all entries including hidden files and directories.
3. Display inode information:
`ls -i`
7373073 book.gif
7373074 clock.gif
7373082 globe.gif
7373078 pencil.gif
7373080 child.gif
7373081 email.gif
7373076 indigo.gif
The above command displays filename with inode value.

ln COMMAND:

ln command is used to create link to a file (or) directory. It helps to provide soft link for desired files. Inode will be different for source and destination.

SYNTAX:

The
Syntax is
`ln [options] existing file (or) directory name new file (or) directory name`

OPTIONS:

-f	Link files without questioning the user, even if the mode of target forbids writing. This is the default if the standard input is not a terminal.
-n	Does not overwrite existing files.
-s	Used to create soft links.

EXAMPLE:

1. `ln -s file1.txt file2.txt`
Creates a symbolic link to 'file1.txt' with the name of 'file2.txt'. Here inode for 'file1.txt' and 'file2.txt' will be different.
2. `ln -s nini nini1`
Creates a symbolic link to 'nini' with the name of 'nini1'.

chown COMMAND:

chown command is used to change the owner/user of the file or directory. This is an admin command, root user only can change the owner of a file or directory.

SYNTAX:

The Syntax is

chown[options] newowner filename/directoryname

OPTIONS:

-R	Change the permission on files that are in the subdirectories of the directory that you are currently in.
-c	Change the permission for each file.
-f	Prevents chown from displaying error messages when it is unable to change the ownership of a file.

EXAMPLE:

1. **chown hiox test.txt** : The owner of the 'test.txt' file is root, Change to new user hiox.
2. **chown -R hiox test**: The owner of the 'test' directory is root, With -R option the files and subdirectories user also gets changed.
3. **chown -chiox calc.txt**: Here change the owner for the specific 'calc.txt' file only.

chmod COMMAND:

chmod command allows you to alter/ Change access rights to files and directories.

File Permission is given for users, group and others as,

	Read	Write	Execute
User	☐	☐	☐
Group	☐	☐	☐
Others	☐	☐	☐
Permission	000		
Symbolic Mode			

SYNTAX:

The Syntax is

chmod[options][MODE]FileName

File Permission

OPTIONS:

#	FilePermission
0	none
1	executeonly
2	writeonly
3	writeandexecute
4	readonly
5	readand execute
6	readand write
7	setall permissions

-c	Displaysnamesofonly those files whose permissions are being changed
-f	Suppressmosterror messages
-R	Changefilesanddirectories recursively
-v	Outputversioninformation andexit.

EXAMPLE:

1. To view your files with what permission they are: `ls -alt`
2. This command is used to view your files with what permission they are.
3. To make a file readable and writable by the group and others: `chmod 066 file1.txt`
4. To allow everyone to read, write, and execute the file: `chmod 777 file1.txt`

mkdir COMMAND: mkdir command is used to create one or more directories. SYNTAX:

The Syntax is

`mkdir[options] directories`

OPTIONS:

- m Set the access mode for the new directories.
- p Create intervening parent directories if they don't exist.
- v Print the help message for each directory created.

EXAMPLE:

1. Create directory:
`mkdir test`
The above command is used to create the directory 'test'.
2. Create directory and set permissions: `mkdir -m 666 test`
The above command is used to create the directory 'test' and set the read and write permission.

rmdir COMMAND:

rmdir command is used to delete/remove a directory and its subdirectories.

SYNTAX:

The Syntax is

rmdir[options..] Directory

OPTIONS:

- p Allow users to remove the directory `dirname` and its parent directories which become empty.

EXAMPLE:

1. To delete/remove a directory **rmdir tmp**
rmdir command will remove/delete the directory `tmp` if the directory is empty.
2. To delete a directory tree: **rm -ir tmp**
This command recursively removes the contents of all subdirectories of the `tmp` directory, prompting you regarding the removal of each file, and then removes the `tmp` directory itself.

mv COMMAND:

mv command which is short for move. It is used to move/rename file from one directory to another. **mv** command is different from **cp** command as it completely removes the file from the source and moves to the directory specified, where **cp** command just copies the content from one file to another.

SYNTAX:

The Syntax is

mv[-f][-i] oldname newname

OPTIONS:

- f This will not prompt before overwriting (equivalent to `--reply=yes`). **mv -f** will move the file(s) without prompting even if it is writing over an existing target.
- i Prompts before overwriting another file.

EXAMPLE:

1. To Rename/Move a file:
mv file1.txt file2.txt
This command renames `file1.txt` as `file2.txt`
 2. To move a directory **mv hscripts tmp**
In the above line **mv** command moves all the files, directories and sub-directories from `hscripts` folder/directory to `tmp` directory if the `tmp` directory already exists. If there is no `tmp` directory it renames the `hscripts` directory as `tmp` directory.
 3. To Move multiple files/More files into another directory **mv file1.txt tmp/file2.txt newdir**
This command moves the files `file1.txt` from the current directory and `file2.txt` from the `tmp` folder/directory to `newdir`.
-

diffCOMMAND:

diffcommandisusedtofinddifferencesbetweentwo files.

SYNTAX:

TheSyntax is

diff[options..]from-fileto-file

OPTIONS:

-a	Treatall filesas textand comparethem line-by-line.
-b	Ignorechangesin amountofwhitespace.
-c	Usethe context output format.
-e	Makeoutput that isavalid ed script.
-H	Useheuristicstospeedhandlingoflargefilesthathavenumerousscattered small changes.
-i	Ignorechangesincase;considerupper- andlower-caseletters equivalent.
-n	PrintsinRCS-format,like-fexceptthateachcommandspecifiesthenumber of lines affected.
-q	OutputRCS-formatdiffs;like-fexceptthateachcommandspecifiesthe number of lines affected.
-r	Whencomparingdirectories, recursivelycompare anysubdirectoriesfound.
-s	Reportwhen twofiles arethe same.
-w	Ignorewhitespace whencomparinglines.
-y	Usethesidebysideoutputformat.

EXAMPLE:

Letscreatetwofilesfile1.txtandfile2.txt andletithavethefollowingdata.

Datainfile1.txt

Datainfile2.txt

HIOXTEST

hscripts.com

withfriendship

hiox india

HIOX TEST

HSCRIPTS.com

withfriend ship

1. Comparefilesignoringwhite

space: diff -w file1.txt
file2.txt

Thiscommandwillcomparethefilefile1.txtwithfile2.txtignoringwhite/blank space
and it will produce the following output.

2c2

<hscripts.com

> HSCRIPTS.com

4d3

<Hioxindia.com

2. Comparethe filessidebyside, ignoringwhite
-

space: `diff-by file1.txt file2.txt`

This command will compare the files ignoring white/blank space, It is easy to differentiate the files.

```
HIOXTEST      HIOXTEST
hscripts.com  |
HSCRIPTS.com  with friend
ship          with friend
ship Hioxindia.com  <
```

The third line (with friend ship) in file2.txt has more blank spaces, but still the `-b` ignores the blank space and does not show changes in the particular line, `-y` print out the result side by side.

3. Compare the files ignoring case. `diff -iy file1.txt file2.txt`

This command will compare the files ignoring case (upper-case and lower-case) and displays the following output.

```
HIOXTEST      HIOXTEST
hscripts.com
                                HSCRIPTS.
com with friend ship  |
with friendship
```

chgrp COMMAND:

`chgrp` command is used to change the group of the file or directory. This is an admin command. Root user only can change the group of the file or directory.

SYNTAX:

The Syntax is

```
chgrp[options] newgroup filename/directoryname
```

OPTIONS:

- R Change the permission on files that are in the subdirectories of the directory that you are currently in.
- c Change the permission for each file.
- f Force. Do not report errors.

```
Hioxindia.com  <
```

EXAMPLE:

1. `chgrp hioxtest.txt`
The group of 'test.txt' file is root, Change to new group hiox.
2. `chgrp -R hioxtest`
The group of 'test' directory is root. With `-R`, the files and its subdirectories also change to new group hiox.
3. `chgrp -chiox calc.txt`

The above command is used to change the group for the specific file ('calc.txt') only. About `wc` Short for word count, `wc` displays a count of lines, words, and characters in a file.

Syntax

wc[-c|-m|-C][-l][-w][file...]

-c	Count bytes.
-m	Count characters.
-C	Same as -m.
-l	Count lines.
-w	Count words delimited by white space characters or new line characters. Delimiting characters are Extended Unix Code (EUC) characters from many code sets defined by <code>iswspace()</code>
File	Name of file to word count.

Examples

wc myfile.txt - Displays information about the file *myfile.txt*. Below is an example of the output.

5	13	57	myfile.txt
5	=		Lines
13	=		Words
57	=		Characters
About split			
Split a file into pieces.			
Syntax			

split[-linecount|-l linecount] [-a suffixlength] [file[name]] *split -b n*

[k | m] [-a suffixlength] [file [name]]

-linecount -l linecount	Number of lines in each piece. Default is 1000 lines.
-a suffixlength	Use suffixlength letters to form the suffix portion of the filenames of the split file. If -a is not specified, the default suffix length is 2. If the sum of the name operand and the suffixlength option-argument would create a filename exceeding NAME_MAX bytes, an error will result; split will exit with a diagnostic message and no files will be created.
-bn	Split a file into pieces of n bytes in size.
-bn k	Split a file into pieces of n*1024 bytes in size.
-bn m	Split a file into pieces of n*1048576 bytes in size.
File	The path name of the ordinary file to be split. If no input file is given or file is -, the standard input will be used.
Name	The prefix to be used for each of the files resulting from the split operation. If no name argument is given, x will be used as the prefix of the output files. The combined length of the basename of prefix and suffixlength cannot exceed NAME_MAX bytes; see OPTIONS.

Examples

split-b22newfile.txtnew -wouldsplitthefile"newfile.txt"intothreeparatefiles called newaa, newab and newac each file the size of 22.

split-l300file.txtnew-wouldsplitthefile"newfile.txt"intofilesbeginningwiththe name "new" each containing 300 lines of text each

Aboutsettimeandtouch

Changefileaccess andmodification time.

Syntax

*touch[-a][-c][-m][-rref_file]-ttime
] filesettime[-fref_file]file*

-a	Changetheaccesstimeoffile.Do notchangethe modification timeunless-m is alsospecified.
-c	Donot createaspecifiedfileifit does notexist. Do not writeanydiagnostic messagesconcerningthis condition.
-m	Changethemodificationtimeoffile.Donotchangetheaccesstimeunless -ais also specified.
-rref_file	Use the correspondingtimesofthe filenamed byref_fileinstead of the current time.
-ttime	Use the specified time instead of the current time. time will be a decimal number of the form: [[CC]YY]MMDDhhmm [.SS] MM - The month of the year [01-12].DD - The day of the month [01-31].hh - The hour of the day [00-23].mm - The minute of the hour [00-59].CC-Thefirsttwodigitsof second two digits of the year. SS -Thesecond ofthe minute [00-61].
-fref_file	Use the correspondingtimes ofthefilenamed byref_fileinstead of the current time.
File	Apath nameofafilewhosetimes areto be modified.

Examplessettime

myfile.txt

Setthefilemyfile.txtasthecurrenttime/ date.

touch newfile.txt

Createsafileknownas"newfile.txt",ifthefiledoesnotalreadyexist.Ifthefilealready exists the accessed / modification time is updated for the file newfile.txt

About comm

Selectorrejectlines commontotwo files.

Syntax

comm[-1][-2][-3] file1file2

-1	Suppress the output column of lines unique to file1.
-2	Suppress the output column of lines unique to file2.
-3	Suppress the output column of lines duplicated in file1 and file2.
file1	Name of the first file to compare.
file2	Name of the second file to compare.

Examples

comm myfile1.txt myfile2.txt

The above example would compare the two files myfile1.txt and myfile2.txt.

Process utilities:

ps COMMAND:

ps command is used to report the process status. ps is the short name for Process Status.

SYNTAX:

The
Syntax is
`ps`
[options]

OPTIONS:

-a	List information about all processes most frequently requested: all those except process group leaders and processes not associated with a terminal..
-A	List information for all processes.
-d	List information about all processes except session leaders.
-e	List information about every process now running.
-f	Generate a full listing.
-j	Print session ID and process group ID.
-l	Generate a long listing.

EXAMPLE

E:

1. `ps`

Output:

```
PID TTY      TIME CMD
2540 pts/1    00:00:00 bash
2621 pts/1    00:00:00 ps
```

In the above example, typing ps alone would list the current running processes.

2. `ps -f`

Output:

```
UID          PID  PPID  C STIME TTY          TIME CMD
nirmala 2540 25360 15 31 pts/1    00:00:00 bash
nirmala 2639 25400 15 51 pts/1    00:00:00 ps -f Displays full information about
currently running processes.
```

kill COMMAND:

kill command is used to kill the background process.

SYNTAX:

The Syntax is `kill[-s][-l]%pid`

OPTIONS:

-s	Specify the signal to send. The signal may be given as a signal name or number.
-l	Write all values of signals supported by the implementation, if no operand is given.
-pid	Process id or job id.
-9	Force to kill a process.

EXAMPLE:**Step by Step process:**

- Open a process music player. `xmms`
press `ctrl+z` to stop the process.
- To know group id or job id of the background task. `jobs -l`
- It will list the background jobs with its job id as,
xmms 3956
kmail 3467
- To kill a job or process. `kill 3956`
kill command kills or terminates the background process xmms.

About nice

Invokes a command with an altered scheduling priority.

Syntax

`nice[-increment|-nincrement]command[argument...]`

-increment -n increment	increment must be in the range 1-19; if not specified, an increment of 10 is assumed. An increment greater than 19 is equivalent to 19. The super-user may run commands with priority higher than normal by using a negative increment such as -10. A negative increment assigned by an unprivileged user is ignored.
command	The name of a command that is to be invoked. If command names any of the special built-in utilities, the results are undefined.
argument	Any string to be supplied as an argument when invoking command.

Examples

nice +13 pico myfile.txt - runs the pico command on myfile.txt with an increment of +13.

About at Schedules a command to be run at a particular time, such as a print job late at night.

Syntax

at	executes commands at a specified time.
----	--

atq	liststheuser'spendingjobs,unless theuseristhesuperuser;inthatcase,everybody'sjobs arelisted.Theformatoftheoutputlines(onefor eachjob)is:Jobnumber,date,hour,job class.
atrm	deletesjobs, identified bytheirjob number.
batch	executescommandswkensystemloadlevelspermit;inotherwords,whenthe load average drops below 1.5, or the value specified in the invocation of atrun.

at[-c|-k|-s][-ffilename][-queueenamel][-m]-ttime[date][-l][-r]

-c	Cshell. csh(1)is usedto executetheat-job.
-k	Kornshell. ksh(1)is used toexecute theat-job.
-s	Bourneshell. sh(1)is used to execute theat-job.
-ffilename	Specifiesthefilethat containsthecommandto run.
-m	Sendsmailoncethecommandhasbeenrun.
-l	Liststhecommandsthat havebeensettorun.
-r	Cancelsthecommandthatyouhavesetinhepast.

Examples

at-m01:35< atjob=Runthecommandslisted inthe'atjob'fileat1:35AM,inadditionall output that is generated fromjob mail to theuserrunningthetask.When this command has been successfully enter you should receive a prompt similar to the below example. commands

will be executed using
/bin/cshjob1072250520.aatWedDec2400:22:002003

at-l=Thiscommandwilllisteachofthescheduledjobsasseen below.
1072250520.a Wed Dec 24 00:22:00 2003

at-r1072250520.a=Deletesthe jobjust created.or

atrm23=Deletesjob 23.

If youwishtocreateajobthat isrepeated youcouldmodifythefilethatexecutesthe commandswithanothercommandthatrecreatethejoborbetter yetusethe [crontab command](#).

Note:Performingjustthe**at**commandatthepromptwillgiveyouanerror"Garbled Time", this is a standard error message if no switch or time setting is given.

Filters:

moreCOMMAND:

morecommandisusedtodisplaytextintheterminalscreen. Itallowsonly backward movement.

SYNTAX:more[options]filename

OPTIONS:

-c	Clearscreenbefore displaying.
-e	Exitimmediatelyafter writingthe last line ofthe last filein theargument list.
-n	Specifyhow manylinesareprinted in the screen foragiven file.
+n	Startsupthe filefromthegivennumber.

EXAMPLE:

1. **more-cindex.php**
Clearsthescreenbefore printingthefile.
2. **more-3index.php**
Printsfirst threelines of thegiven file.Press**Enter**to displaythefileline byline.

headCOMMAND:

headcommandisusedtodisplaythefirsttenlinesofafile,andalsospecifieshowmany lines to display.

SYNTAX:

head[options]filename

OPTIONS:

-n	To specifyhow manylinesyouwant to display.
-n number	Thenumberoption-argumentmustbeadecimalintegerwhosesignaffects the location in the file, measured in lines.
-c number	Thenumberoption-argumentmustbeadecimalintegerwhosesignaffects the location in the file, measured in bytes.

EXAMPLE:

1. **head index.php**
Thiscommand printsthe first 10lines of 'index.php'.
2. **head-5index.php**
Theheadcommanddisplays the first5linesof 'index.php'.
3. **head-c5index.php**
Theabove commanddisplaysthe first5charactersof'index.php'.

tail COMMAND:

tailcommandisusedtodisplaythelastorbottompartofthefile.Bydefaultitdisplays last 10 lines of a file.

SYNTAX:tail[options]filename**OPTIONS:**

-l	To specifytheunits oflines.
-b	To specifytheunits ofblocks.
-n	To specifyhow manylinesyouwant to display.
-c number	Thenumberoption-argumentmustbeadecimalintegerwhosesignaffectsthe location in the file, measured in bytes.
-n number	Thenumberoption-argumentmustbeadecimalintegerwhosesignaffectsthe location in the file, measured in lines.

EXAMPLE:

1. `tail index.php`
It displays the last 10 lines of 'index.php'.
2. `tail -2 index.php`
It displays the last 2 lines of 'index.php'.
3. `tail -n 5 index.php`
It displays the last 5 lines of 'index.php'.
4. `tail -c 5 index.php`
It displays the last 5 characters of 'index.php'.

cut COMMAND:

cut command is used to cut out selected fields of each line of a file. The cut command uses delimiters to determine where to split fields.

SYNTAX: `cut[options]`

OPTIONS:

-c	Specifies character positions.
-b	Specifies byte positions.
-d flags	Specifies the delimiters and fields.

EXAMPLE:

1. `cut -c 1-3 text.txt`
Output: Thi
Cut the first three letters from the above line.
2. `cut -d, -f 1,2 text.txt`
Output: This is, an example program
The above command is used to split the fields using delimiter and cut the first two fields.

paste COMMAND:

paste command is used to paste the content from one file to another file. It is also used to set column format for each line.

SYNTAX: `paste[options]`

OPTIONS:

-s	Paste one file at a time instead of in parallel.
-d	Reuse characters from LIST instead of TABs.

EXAMPLE:

1. `paste test.txt > test1.txt`
Paste the content from 'test.txt' file to 'test1.txt' file.
2. `ls | paste - - - -`
List all files and directories in four columns for each line.

sort COMMAND:

sort command is used to sort the lines in a text file.

SYNTAX: `sort[options] filename`

OPTIONS:

-r	Sorts in reverse order.
-u	If line is duplicated display only once.
-o filename	Send sorted output to a file.

EXAMPLE:

1. **sort test.txt**
Sortsthe'test.txt'fileandprintsresultinthe screen.
2. **sort -rtest.txt**
Sortsthe'test.txt'fileinreverseorder and printsresult inthescreen.

Aboutuniq

Reportorfilterout repeatedlines ina file.

Syntax:`uniq[-c|-d|-u ][-ffields][-schar][-n][+m][input_file][output_file]`

-c	Precedeeachoutputlinewithacountofthenumberoftimesthelineoccurredin the input.
-d	Suppresssthewritingof linesthat arenot repeated in theinput.
-u	Suppresssthewritingof linesthat are repeated intheinput.
-f fields	Ignore the first fields fields on each input line when doing comparisons, where fields is a positive decimal integer. A field is the maximal string matched by the basic regular expression: <code>[[:blank:]]*[^[:blank:]]*</code> If fields specifies more fields than appear on an input line, a null string will be used for comparison.
-s char	Ignore the first chars characters when doing comparisons, where chars is a positive decimal integer. If specified in conjunction with the -f option, the first chars characters after the first fields fields will be ignored. If chars specifies more characters thanremain on an input line, a null string will be used for comparison.
-n	Equivalentto -ffields withfields setto n.
+m	Equivalentto -schars withcharssetto m.
input _file	Apath nameofthe inputfile.Ifinput_file is notspecified,oriftheinput_fileis- ,thestandard inputwill be used.
output _file	Apath nameof theoutput file.If output_fileis notspecified,thestandard output willbeused.Theresults areunspecifiedifthefilenamedbyoutput_fileisthefilenamed byinput_file.

Examples

uniqmyfile1.txt>myfile2.txt-Removesduplicatelinesinthe firstfile1.txtandoutputs the results to the second file.

trTranslatecharacters.

Syntax:`tr[-c][-d][-s][string1][string2]`

-c	Complementthe setof charactersspecifiedbystring1.
-d	Deleteall occurrencesof input charactersthat arespecifiedbystring1.
-s	Replaceinstancesofrepeatedcharacterswithasingl character.
string1	Firststringor character tobechanged.
string2	Secondstringorcharacter tochangethe string1.

Examples

echo "12345678 9247" | tr 123456789 computerh - this example takes an echo response of '12345678 9247' and pipes it through the tr replacing the appropriate numbers with the letters. In this example it would return *computer hope*.

tr-cd'\11\12\40-\176'<myfile1>myfile2-thisexamplewouldtakethefilemyfile1and strip all non printable characters and take that results to myfile2.

General Commands:

date COMMAND:

date command prints the date and time.

SYNTAX:

The Syntax is

date[options][+format] [date]

OPTIONS:

-a	Slowly adjust the time by sss.fff seconds (fff represents fractions of a second). This adjustment can be positive or negative. Only system admin/ super user can adjust the time.
-sdate-string	Set the time and date to the values specified in the date string. The date string may contain the month names, time zones, 'am', 'pm', etc.
-u	Display (or set) the date in Greenwich Mean Time (GMT-universal time).

Format:

%a	Abbreviated weekday (Tue).
%A	Full weekday (Tuesday).
%b	Abbreviated month name (Jan).
%B	Full month name (January).
%c	Country-specific date and time format.
%D	Date in the format %m/%d/%y.
%j	Julian day of year (001-366).

%n	Insert a new line.
%p	String to indicate a.m. or p.m.
%T	Time in the format %H:%M:%S.
%t	Tab space.
%V	Week number in year (01-52); start week on Monday.

EXAMPLE:

1. date command **date**: The above command will print **Wed Jul 23 10:52:34 IST 2008**
2. To use tab space: **date+"Date is %D %t Time is %T"**
The above command will remove space and print as **Date is 07/23/08 Time is 10:52:34**
3. To know the week number of the year, **date -V** The above command will print **30**
4. To set the date, **date -s "10/08/2008 11:37:23"**
The above command will print **Wed Oct 08 11:37:23 IST 2008**

who COMMAND:

who command can list the names of users currently logged in, their terminal, the time they have been logged in, and the name of the host from which they have logged in.

SYNTAX: **who[options][file]**

OPTIONS:

-am	Print the username of the invoking user. The 'am' and 'i' must be space separated.
-b	Print time of last system boot.
-d	Print dead processes.
-H	Print column headings above the output.
-i	Include idle time as HOURS:MINUTES. An idle time of . indicates activity within the last minute.

-m	Sameaswhoami.
-q	Printonlythe usernames andthe usercount/total noof users logged in.
-T,-w	Includeuser'smessagestatusintheoutput.

EXAMPLE:

1. **who-uH**

Output:

NAME LINE TIME IDLE PIDCOMMENT

hiox tty3 Jul 1011:08. 4578

This sample output was produced at 11 a.m. The "." indicates activity within the last minute.

2. **whoami**

whoami command prints the user name.

echo COMMAND:

echo command prints the given input string to standard output.

SYNTAX: **echo**[options..][string]

OPTIONS:

-n	do not output the trailing newline
-e	enable interpretation of the backslash-escaped characters listed below
-E	disable interpretation of those sequences in STRINGS

Without -E, the following sequences are recognized and interpolated:

\NNN	the character whose ASCII code is NNN (octal)
\a	alert (BEL)
\\	backslash
\b	backspace
\c	suppress trailing newline
\f	form feed
\n	newline
\r	carriage return
\t	horizontal tab
\v	vertical tab

EXAMPLE:

1. echo command
echo "hscriptsHioxIndia"
The above command will print as **hscriptsHioxIndia**
2. To use backspace:

```
echo-e"hscrip\tbHiox \bIndia"
```

The above command will remove space and print as **hscripHioxIndia**

3. To use tab space in echo command

```
echo -e "hscrip\ttHiox\ttIndia"
```

The above command will print as **hscrip Hiox India**

passwd COMMAND:

passwd command is used to change your password.

SYNTAX: passwd [options]

OPTIONS:

-a	Show password attributes for all entries.
-l	Lock password entry for name.
-d	Delete password for name. The login name will not be prompted for password.
-f	Force the user to change password at the next login by expiring the password for name.

EXAMPLE:

1. **passwd**

Entering just passwd would allow you to change the password. After entering passwd you will receive the following three prompts:

Current Password:

New Password:

Confirm New Password:

Each of these prompts must be entered correctly for the password to be successfully changed.

pwd COMMAND:

pwd - Print Working Directory. pwd command prints the full filename of the current working directory. **SYNTAX: pwd [options]**

OPTIONS:

-P	The path name printed will not contain symbolic links.
-L	The path name printed may contain symbolic links.

EXAMPLE:

1. Display the current working directory.

pwd

If you are working in home directory then, pwd command displays the current working directory as **/home**.

cal COMMAND:

cal command is used to display the calendar.

SYNTAX: cal [options] [month] [year] OPTIONS:

-1	Display single month as output.
-3	Display prev/current/next month output.
-s	Display sunday as the first day of the week.

-m	Displays Mondayasthe first dayof theweek.
-j	DisplaysJuliandates(daysone-based,numbered fromJanuary1).
-y	Displaysa calendarforthecurrentyear.

EXAMPLE:

1. **cal**

Output:

```
September2008
SuMo Tu WeTh Fr Sa
 123456
 7 8 9 10 11 12 13
14 15 16 17 18 19 20
21 22 23 24 25 26 27
28 29 30
calcommanddisplays thecurrentmonth calendar.
```

2. **cal-352008**

Output:

```
April2008      May2008      June2008
SuMo Tu WeTh Fr SaSu Mo Tu WeTh Fr SaSu Mo Tu WeTh Fr Sa
 12345          1 2 3 1 2 3 4 5 6 7
 6 7 8 9 10 11 12 4 5 6 7 8 9 10 8 9 10 11 12 13 14
13 14 15 16 17 18 1911 12 13 14 15 16 1715 16 17 18 19 20 21
20 21 22 23 24 25 2618 19 20 21 22 23 2422 23 24 25 26 2728
27 28 29 30      25 26 27 28 29 30 31 29 30
Herethe cal commanddisplays the calendar ofApril,MayandJunemonthof year 2008.
```

login Command

Signsintoanews system.

Syntax:login [-p][-ddevice][-h hostname|terminal |-r hostname][name[environ]]

Examples

logincomputerhope.com -Wouldattempttologintothecomputerhopedomain.

unamecommand

Printnameofcurrent system.

Syntax

uname[-a] [-i][-m] [-n][-p][-r][-s][-v][-X][-S systemname]

-a	Print basic information currentlyavailablefrom thesystem.
-i	Printthenameofthehardwareimplementation (platform).
-m	Printthemachinehardwarename(class).Useof thisoptionisdiscouraged; use uname-pinstead.
-n	Printthenodename(thenodenameis thename bywhich thesystem isknown to acomunications network).
-p	Printthecurrenthost's ISAorprocesortype.
-r	Printtheoperatingsystemrelease level.
-s	Printthenameofthe operatingsystem. Thisis thedefault.
-v	Printtheoperatingsystem version.

Examples


uname -a

List the basic system information, OS release, and OS version as shown below. SunOS hope 5.7 Generic_106541-08 sun4m sparc SUNW,SPARCstation-10 **uname -p** Display the Linux platform.

SED:

What is sed?

- An on-interactive stream editor
- Interprets sed instructions and performs actions
- Used to:
 - Automatically perform edits on file(s)
 - Simplify doing the same edits on multiple files
 - Write conversion programs

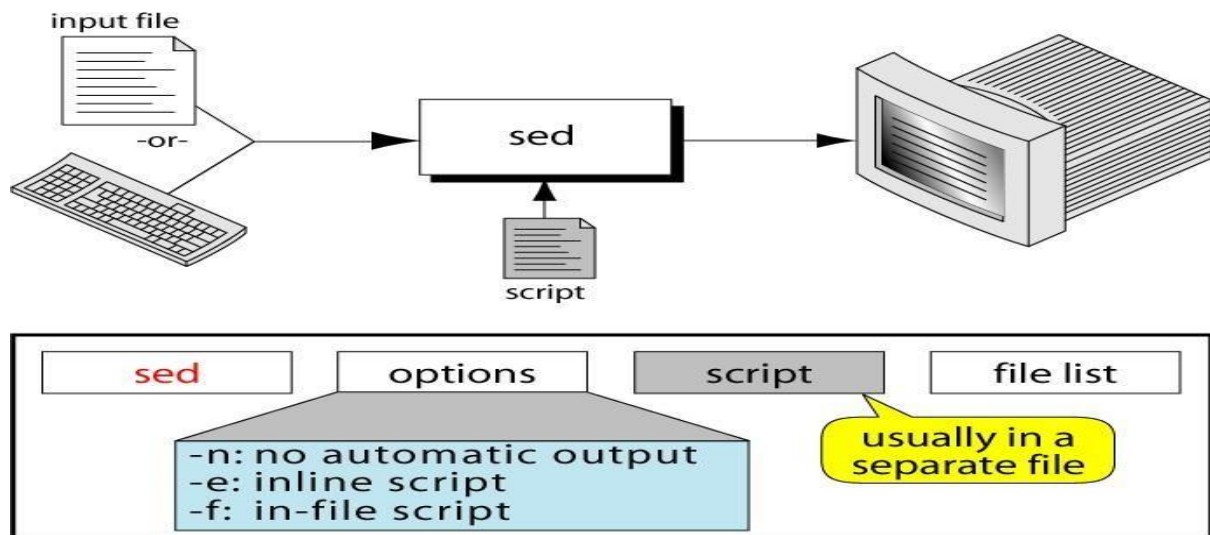

sed command syntax


```
$ sed -e 'address command' input_file
```

(a) Inline Script

```
$ sed -f script.sed input_file
```

(b) Script File

sed Operation

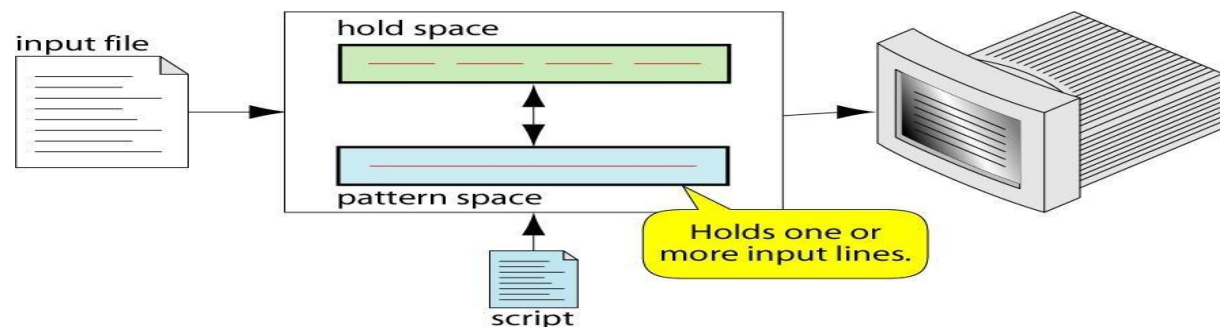

How Does it Work?

- sed reads line of input
 - line of input is copied into a temporary buffer called pattern space
 - editing commands are applied
 - subsequent commands are applied to line in the pattern space, not the original input line
 - once finished, line is sent to output(unless -n option was used)
 - line is removed from pattern space
- sed reads next line of input, until end of file

Note: input file is unchanged

sed instruction format

- address determines which lines in the input file are to be processed by the command(s)
 - if no address is specified, then the command is applied to each input line
- address types:
 - Single-Line address
 - Set-of-Lines address
 - Range address
 - Nested address

Single-Line Address

- Specifies only one line in the input file
 - special: dollarsign (\$) denotes last line of input file

Examples:

- show only line 3
sed -n -e '3p' input-file
- show only last line
sed -n -e '\$p' input-file
- substitute —end if with —fi on line 10
sed -e '10s/endif/fi/' input-file

Set-of-LinesAddress

- use regular expression to match lines
 - written between two slashes
 - process only lines that match
 - may match several lines
 - lines may or may not be consecutive

Examples:

sed -e 'key/s/more/other/' input-file

sed -n -e '/r..t/ p' input-file

RangeAddress

- Defines a set of consecutive lines

Format:

start-addr,end-addr (inclusive)

Examples:

10,50 line-number,line-number

10,/R.E/ line-number,/RegExp/

/R.E./,10 /RegExp/,line-number

/R.E./,/R.E/ /RegExp/,/RegExp/

Example: RangeAddress

%sed -n -e '/^BEGIN\$/^END\$/p' input-file

- Print lines between BEGIN and END, inclusive

BEGIN

Line 1 of input

Line 2 of input

Line 3 of input

Line 4 of input

Line 5 of input

NestedAddress

- Nested address contained within another address

Example:

print blank lines between line 20 and 30

20,30{

/^\$/ p

}

Address with !


- **address with an exclamation point (!):**
instruction will be applied to all lines that do not match the address

Example:

print lines that do not contain —obsolete

sed -e '/obsolete/!p' input-file

sed commands

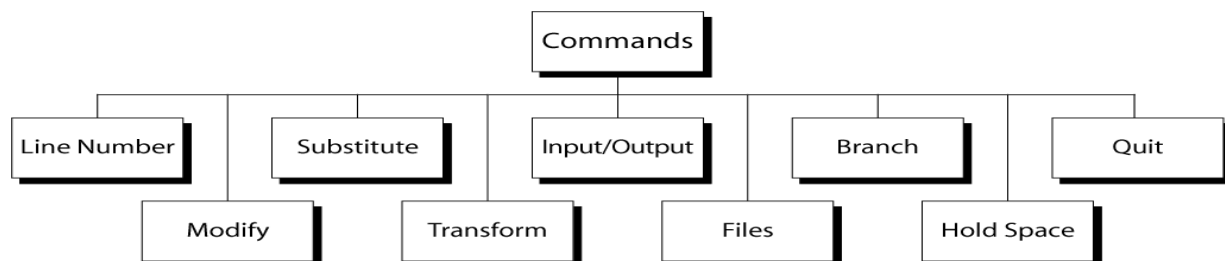

Line Number


- `linenumbercommand(=)` writes the current line number before each matched/output line

Examples:

`sed -e '/Two-thirds-time/= 'tuition.data sed`

`-e '/^[0-9][0-9]/= ' inventory`

modify commands

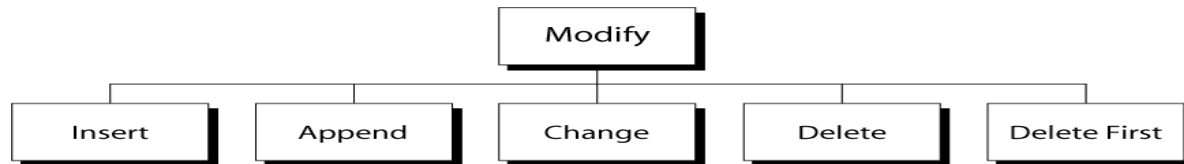

Insert Command: i

- add one or more lines directly to the output before the address:
 - inserted—text never appears in sed, pattern space
 - cannot be used with a range address; can only be used with the single-line and set-of-lines address types

Syntax:

`[address]i\`

text

Append Command: a

- add one or more lines directly to the output after the address:
 - Similar to the insert command (i), append cannot be used with a range address.
 - Appended—text does not appear in sed, pattern space.

Syntax:

`[address]a\`

text

Change Command: c

- replaces an entire matched line with new text
- accepts four address types:
 - single-line, set-of-line, range, and nested addresses.

Syntax:

`[address1[,address2]]c\`

text

Delete Command: d

- deletes the entire pattern space
 - commands following the delete command are ignored since the deleted text is no longer in the pattern space

Syntax: `[address1[,address2]]d`

Substitute Command: s

Syntax: `[addr1][[,addr2]]s/search/replace/[flags]`


- replace text selected by search string with replacement string
 - search string can be regular expression
 - flags:** → global (g), i.e. replace all occurrences
-

→specificsubstitutioncount(integer),default1


RegularExpressions:usewithsed

Metacharacter	Description/Matches...
.	Any one character, except new line
*	Zero or more of preceding character
^	A character at beginning of line
\$	A character at end of line
\char	Escape the meaning of <i>char</i> following it
[]	Any one of the enclosed characters
\(\)	Tags matched characters to be used later
x\{m\}	Repetition of character x, m times
\<	Beginning of word
\>	End of word

SubstitutionBackReferences

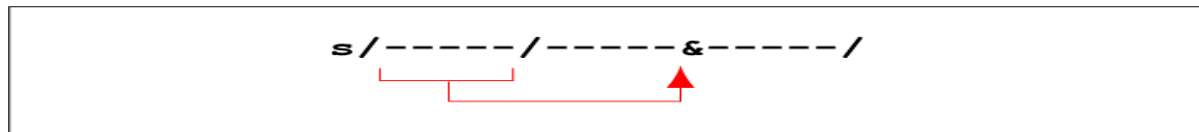

(a) Whole Pattern Substitution

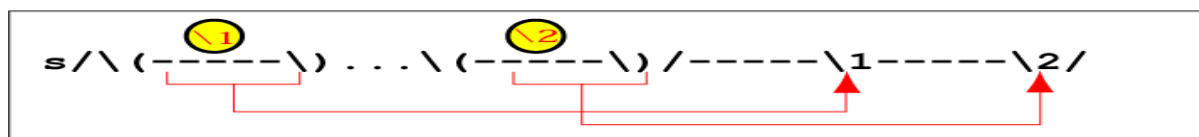

(b) Numbered Buffer Substitution

**Example:ReplacementString&
\$catdatafile**

CharlesMain	3.0	.98	3	34
SharonGray	5.3	.97	5	23

PatriciaHemenway	4.0	.7	4	17
TB Savage	4.4	.84	5	20
AMMain Jr.	5.1	.94	3	13
MargotWeber	4.5	.89	5	9
AnnStephens	5.7	.94	5	13

\$sed -e's/[0-9][0-9]\$/&.&5/' datafile

CharlesMain	3.0	.98	3	34.5
SharonGray	5.3	.97	5	23.5

PatriciaHemenway	4.0	.7	4	17.5
TB Savage	4.4	.84	5	20.5
AMMain Jr.	5.1	.94	3	13.5
MargotWeber	4.5	.89	5	9
AnnStephens	5.7	.94	5	13.5


Transform Command (y)

Syntax:[addr1][,addr2]y/a/b/

- translatesonecharacter'a'toanother'b'
- cannotuseregularexpressionmetacharacters
- cannotindicate arangeof characters
- similarto—trlcommand

Example:

`$sed-e'1,10y/abcd/wxyz'` datafile sed
i/o commands

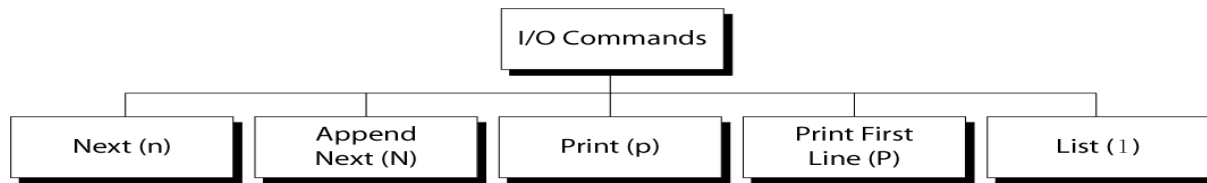

Input(next)Command: n and N

- Forced to read the next input line
 - Copies the contents of the pattern space to output
 - Deletes the current line in the pattern space
 - Refills it with the next input line
 - Continues processing
- N (uppercase) Command
 - Adds the next input line to the current contents of the pattern space
 - Useful when applying patterns to two or more lines at the same time

Output Command: p and P

- Print Command (p)
 - Copies the entire contents of the pattern space to output
 - Will print a line twice unless the option `--nl` is used
- Print command: P
 - Prints only the first line of the pattern space
 - Prints the contents of the pattern space up to and including a new line character
 - Any text following the first newline is not printed

List Command (l)

- The list command: l
 - Shows special characters (e.g. tab, etc)
- The octal dump command (`od -c`) can be used to produce a similar result

Hold Space

- Temporary storage area used to save the contents of the pattern space
- 4 commands that can be used to move text back and forth between the pattern space and the hold space:

h, H
g, G

File Commands

- Allow to read and write from/to file while processing standard input
- read: r command
- write: w command

Read File Command

Syntax: **r filename**

- Queue the contents of filename to be read and inserted into the output stream at the end of the current cycle, or when the next input line is read
 - If filename cannot be read, it is treated as if it were an empty file, without
-

anyerrorindication

- singleaddressonly

WriteFilecommand **Syntax:**

w filename

- Writethepatternspacetofilename
- Thefilename will becreated (ortruncated)before the firstinput lineisread
- allwcommandswhichrefertothesamefilenameareoutputthroughthesame FILE stream

BranchCommand(b)

- Changethereregularflowofthecommandsinthescriptfile

Syntax: [addr1][,addr2]b[label]

- Branch(unconditionally)to_label,,orendofscript
- If —labell is supplied, execution resumes at the line following :label; otherwise, control passes to the end of the script

- Branchlabel

:mylabel

Example: The quit (q)

CommandSyntax:[addr]q

- Quit(exit sed)when addr isencountered.

Example:Displaythefirst 50 lines andquit

%sed-e'50q'datafile

Same as:

% sed-n-e'1,50p'datafile

%head -50 datafile

AWK

Whatis awk?

- **createdby:**Aho,Weinberger,andKernighan
- scriptinglanguageusedformanipulatingdataandgeneratingreports
- versionsofawk
 - awk,nawk,mawk,pgawk,...
 - GNUawk:gawk

Whatcan you dowithawk?

- **awkoperation:**
 - scans a filelinebyline
 - splitseachinput lineintofields
 - comparesinputline/fieldsto pattern
 - performsaction(s)onmatchedlines


○Usefulfor:

- transformdatafiles
- produceformattedreports

○**Programming constructs:**

- formatoutput lines
- arithmeticandstringoperations
- conditionalsand loops

- **TheCommand:**awk

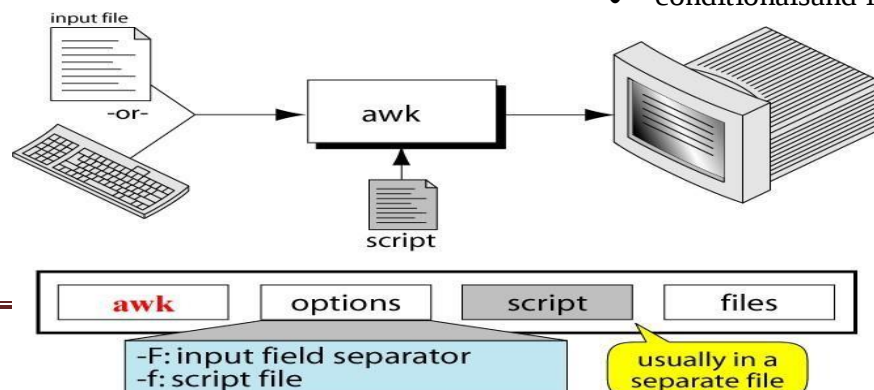

Basic awk Syntax

- `awk[options]'script'file(s)`
- `awk[options]-fscriptfilefile(s)`

Options:

- F to change input field separator
- f to name script file

Basic awk Program

- consists of patterns & actions:
 - pattern{action}**
 - if pattern is missing, action is applied to all lines
 - if action is missing, the matched line is printed
 - must have either pattern or action

Example:

`awk '/for/' testfile`

- prints all lines containing string `for` in testfile

Basic Terminology: input file


- A field is a unit of data in a line
- Each field is separated from the other fields by the field separator
 - default field separator is whitespace
- A record is the collection of fields in a line
- A data file is made up of records

Example Input File

	Field 1 (First_Name)	Field 2 (Last_Name)	Field 3 (Pay_Rate)	Field 4 (Hours)
Record 2	Susan	White	6.00	23
	Mark	Eagle	6.25	40
Record 4	Tuan	Nguyen	7.89	44
	Dan	Black	7.23	40
	Amanda	Trapp	6.95	40
	Brian	Devaux	7.95	0
	Chris	Walljasper	6.89	32
	Mary	Lamb	8.22	40
Record 10	Jackie	Kammaoto	7.59	40
	Nicky	Barber	6.35	40

A file with 10 records, each with four fields

Buffers

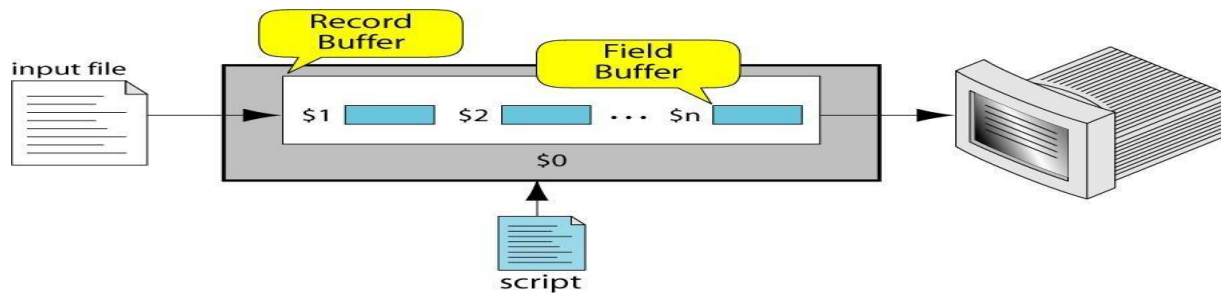

awk supports two types of buffers:

record and field

- **field buffer:**
 - one for each field in the current record.
 - names: \$1, \$2, ...
- **record buffer:**

- \$0 holds the entire record

Some System Variables

FS	Field separator (default=whitespace)
RS	Record separator (default=\n)
NF	Number of fields in current record
NR	Number of the current record
OFS	Output field separator (default=space)
ORS	Output record separator (default=\n)
FILENAME	Current filename

Example: Records and Fields

%cat emps

```
TomJones    4424  5/12/66    543354
MaryAdams   5346  11/4/63    28765
Sally Chang 1654   7/22/54    650000
Billy Black 1683   9/23/44    336500
```

%awk '{print NR,\$0}' emps

1 TomJones	4424	5/12/66	543354
2 MaryAdams	5346	11/4/63	28765
3 Sally Chang	1654	7/22/54	650000
4 Billy Black	1683	9/23/44	336500
Example: Space as Field Separator			
%cat emps			

```
TomJones    4424  5/12/66 543354
MaryAdams   5346  11/4/63 28765
Sally Chang 1654   7/22/54 650000
Billy Black 1683   9/23/44 336500
```

% awk '{print NR,\$1,\$2,\$5}' emps

```
1 TomJones 543354
2 MaryAdams 28765
3 Sally Chang 650000
4 Billy Black 336500
```


Example: Colon as Field Separator

%cat em2

```
TomJones:4424:5/12/66:543354
MaryAdams:5346:11/4/63:28765
SallyChang:1654:7/22/54:650000
Billy Black:1683:9/23/44:336500
%awk -F ':' /Jones/{print $1,$2}' em2
Tom Jones 4424
```

awk Scripts

- awk scripts are divided into three major parts:

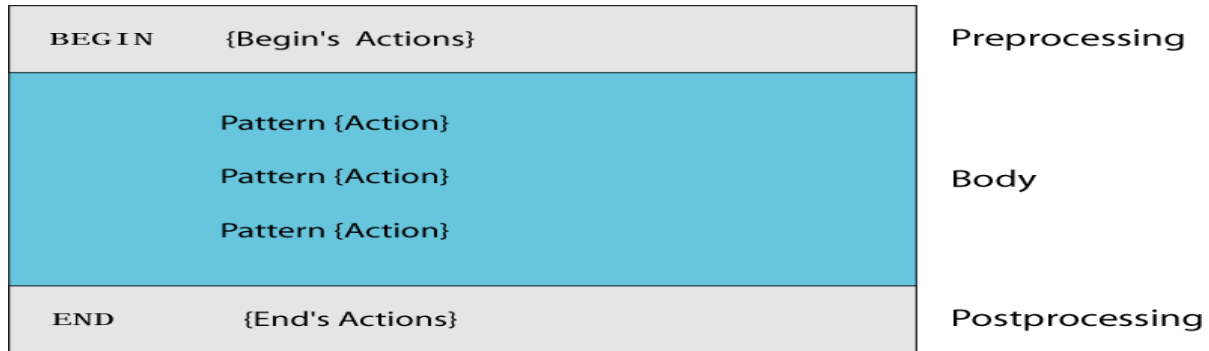

- comment lines start with #
- **BEGIN**: pre-processing
 - performs processing that must be completed before the file processing starts (i.e., before awk starts reading records from the input file)
 - useful for initialization tasks such as to initialize variables and to create report headings
- **BODY**: Processing
 - contains main processing logic to be applied to input records
 - like a loop that processes input data one record at a time:
 - if a file contains 100 records, the body will be executed 100 times, one for each record
- **END**: post-processing
 - contains logic to be executed after all input data have been processed
 - logics such as printing report grand totals should be performed in this part of the script

Pattern/Action Syntax

```
pattern {statement}
```

(a) One Statement Action


```
pattern {statement1; statement2; statement3}
```

(b) Multiple Statements Separated by Semicolons

```
pattern
{
    statement1
    statement2
    statement3
}
```

(c) Multiple Statements Separated by Newlines

Categories of Patterns

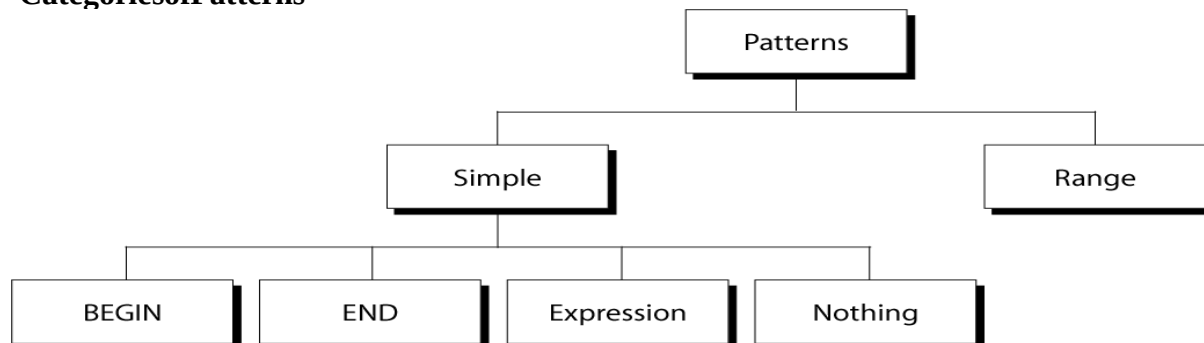

- match
 - entireinputrecord
 - regularexpressionenclosedby_/,s
 - explicitpattern-matchingexpressions
 - ~(match),!~ (notmatch)
- expressionoperators
 - arithmetic
 - relational
 - logical

Example:matchinputrecord

%catemployees2

TomJones:4424:5/12/66:543354
MaryAdams:5346:11/4/63:28765
SallyChang:1654:7/22/54:650000
Billy Black:1683:9/23/44:336500

% awk -F: '/00\$/' employees2
SallyChang:1654:7/22/54:650000
Billy Black:1683:9/23/44:336500

Example:explicitmatch

%catdatafile

northwestNW	CharlesMain	3.0	.98	3	34
westernWE	SharonGray	5.3	.97	523	
southwestSW	Lewis Dalsass	2.7	.8	218	
southernSO	SuanChin	5.1	.95	415	
southeastSE	PatriciaHemenway	4.0	.7	4	17
easternEA	TB Savage	4.4	.84	5	20
northeast NE	AMMain	5.1	.94	3	13
north NO	Margot Weber	4.5	.89	5	9
centralCT	AnnStephens	5.7	.94	5	13

%awk'\$5~\.[7-9]+/' datafile

southwestSW	Lewis Dalsass	2.7	.8	218	
centralCT	AnnStephens	5.7	.94	5	13

Examples:matchingwithREs

%awk'\$2!~/E/{print\$1, \$2}'
datafile
northwestNW
southwest SW
southernSO
northNO
centralCT

%awk'/^[ns]/{print\$1}' datafile
northwest
southwest
southernsoutheast
northeastnorth

Arithmetic Operators

Operator	Meaning	Example
+	Add	x+y
-	Subtract	x-y
*	Multiply	x*y
/	Divide	x/y
%	Modulus	x%y
^	Exponential	x^y

Example:

```
%awk '$3*$4 > 500 {print $0}' file
```

Relational Operators

Operator	Meaning	Example
<	Less than	x<y
<=	Less than or equal	x<=y
==	Equal to	x==y
!=	Not equal to	x!=y
>	Greater than	x>y
>=	Greater than or equal to	x>=y
~	Matched by regexp	x~ /y/
!~	Not matched by regexp	x!~ /y/

Logical Operators

Operator	Meaning	Example
&&	Logical AND	a&&b
	Logical OR	a b
!	NOT	!a

Examples:

```
%awk '($2 > 5) && ($2 <= 15) {print $0}' file
```

```
%awk '$3 == 100 || $4 > 50' file
```

Range Patterns

- Matches ranges of consecutive input lines


Syntax:

```
pattern1, pattern2 {action}
```

- pattern can be any simple pattern
- **pattern1** turns action on
- **pattern2** turns action off

Range Pattern Example



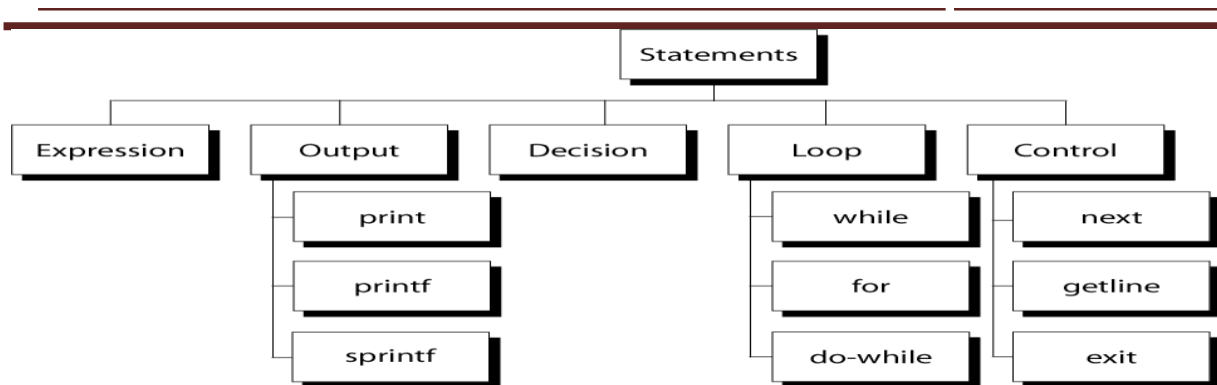

awk expressions

- Expression is evaluated and returns value
 - consists of any combination of numeric and string constants, variables, operators, functions, and regular expressions
- Can involve variables
 - As part of expression evaluation
 - As target of assignment

awk variables

- A user can define any number of variables within an awk script
- The variables can be numbers, strings, or arrays
- Variable names start with a letter, followed by letters, digits, and underscore
- Variables come into existence the first time they are referenced; therefore, they do not need to be declared before use
- All variables are initially created as strings and initialized to an null string —

Format: variable = expression

Examples: % awk '\$1 ~ /Tom/'

{wage = \$3 * \$4; print wage} filename

% awk '\$4 == "CA" { \$4 = "California"; print \$0 } filename

awk assignment operators

=	Assign result of right-hand-side expression to left-hand-side variable
++	Add 1 to variable
--	Subtract 1 from variable
+=	Assign result of addition
-=	Assign result of subtraction
*=	Assign result of multiplication
/=	Assign result of division
%=	Assign result of modulo
^=	Assign result of exponentiation

Awk example

- File: grades

john 85 92 78 94 88	{total = \$2 + \$3 + \$4 + \$5 + \$6
andrea 89 90 75 90 86	avg = total / 5
jasper 84 88 80 92 84	print \$1, avg }
- awk script: average

#average five grades	○ Run as:
	awk -f average grades

Output Statements

print

print easy and simple output

printf

print formatted (similar to C printf)

sprintf

format string (similar to C sprintf)

Function: print

- Write to standard output
- Output is terminated by ORS
 - default ORS is newline
- If called with no parameter, it will print \$0
- Printed parameters are separated by OFS,
 - default OFS is blank
- Print control characters are allowed:
 - \n \f \a \t \...

print example

```
%awk '{print}' grades
```

```
john 85 92 78 94 88
```

```
andrea 89 90 75 90 86
```

```
%awk '{print $0}' grades john
```

```
85 92 78 94 88
```

```
andrea 89 90 75 90 86
```

```
%awk '{print ($0)}' grades
```

```
john 85 92 78 94 88
```

```
andrea 89 90 75 90 86
```

Redirecting print output

- Print output goes to standard output

unless redirected via:

```
> —file|
```

```
>> —file|
```

```
|—command|
```

- will open file or command only once
- subsequent redirections append to already open stream

print Example

```
%awk '{print $1,$2>"file"}' grades
```

```
%
```

```
cat file
```

```
john 85
```

```
andrea 89
```

```
jasper 84
```

```
% awk '{print $1,$2|"sort"}' grades
```

```
andrea 89
```

```
jasper 84
```

```
john 85
```

printf: Formatting output

Syntax: printf(format-string, var1, var2, ...)

- works like Cprintf
- each format specifier in —format-string requires argument of matching type

Format specifiers

%d, %i	decimal integer
%c	single character
%s	string of characters
%f	floating point number
%o	octal number
%x	hexadecimal number
%e	scientific floating point notation
%%	the letter —%

Format specifier examples

Given: $x = _A$, $y = 15$, $z = 2.3$, and $\$1 = \text{Bob Smith}$	
Printf Format Specifier	What it Does
%c	<i>printf("The character is %c\n", x)</i> output: The character is A
%d	<i>printf("The boy is %d years old\n", y)</i> output: The boy is 15 years old
%s	<i>printf("My name is %s\n", \$1)</i> output: My name is Bob Smith
%f	<i>printf("z is %5.3f\n", z)</i> output: z is 2.300

Format specifier modifiers

- between —% and letter
%10s %7d %10.4f %-20s
- meaning:
 - width of field, field is printed right justified
 - precision: number of digits after decimal point
 - —% will left justify
 -

sprintf: Formatting text

Syntax:

sprintf(format-string, var1, var2, ...)

- Works like printf, but does not produce output
- Instead it returns formatted string

Example:

```
{
    text=sprintf("1: %d-2: %d", $1, $2) print
    text
}
```

awkbuiltinfunctions

tolower(string)

- returns a copy of string, with each upper-case character converted to lower-case. Nonalphabetic characters are left unchanged.

> **Example:** tolower("MiXeDcAsE123")
returns "mixedcase123"

toupper(string)

- returns a copy of string, with each lower-case character converted to upper-case.
- > **awkExample:** list of products

103:swaybar:49.99
101:propeller:104.99 104:fishing

line:0.99 113:premiumfish
bait:1.00 106:cupholder:2.49
107:cooler:14.89

112:boat cover:120.00
109:transom:199.00

110:pulley:9.88 105:mirror:4.99
108:wheel:49.99 111:lock:31.00
102:trailerhitch:97.95

awkExample: output MarinePartsRU's Main catalog

Part-id	name	price
101	propeller	104.99
102	trailerhitch	97.95
103	swaybar	49.99
104	fishingline	0.99
105	mirror	4.99
106	cupholder	2.49
107	cooler	14.89
108	wheel	49.99
109	transom	199.00
110	pulley	9.88
111	lock	31.00
112	boatcover	120.00
113	premiumfish bait	1.00

Catalog has 13 parts

awkExample:

```
complete BEGIN {
    FS = ":"
    print "MarinePartsRU's"
    print "Main catalog"
    print "Part-id\tname\t\tprice"
    print "===== "
    { printf("%3d\t%-20s\t%6.2f\n", $1, $2, $3) count++ } END {
        print "===== "
        print "Catalog has " count " parts"
    }
```

awkArray

- awk allows one-dimensional arrays to store strings or numbers
- index can be number or string
- array need not be declared
 - its size
 - its elements
- array elements are created when first used
 - initialized to 0 or —

Arrays in awk

Syntax: arrayName[index] = value

Examples:

```
list[1] = "one"
list[2] = "three"
list["other"] = "ohmy!"
```

Illustration: Associative Arrays

- awk arrays can use string as index

Name	Age	Department	Sales
"Robert"	46	"19-24"	1,285.72
"George"	22	"81-70"	10,240.32
"Juan"	22	"41-10"	3,420.42
"Nhan"	19	"17-A1"	46,500.18
"Jonie"	34	"61-61"	1,114.41

Index Data Index Data

Awk builtin split function

split(string,array,fieldsep)

- divides string into pieces separated by fieldsep, and stores the pieces in array
- if the fieldsep is omitted, the value of FS is used.

Example:

```
split("auto-da-fe",a,"-")
```

- sets the contents of the array a as follows:

```
a[1] = "auto"
a[2] = "da"
a[3] = "fe"
```

Example: process sales data

- input file:

Sales		
1	clothing	3141
1	computers	9161
1	textbooks	21312
2	clothing	3252
2	computers	12321
2	supplies	2242
2	textbooks	15462

- output:

- summary of category sales

Illustration:processeachinputline



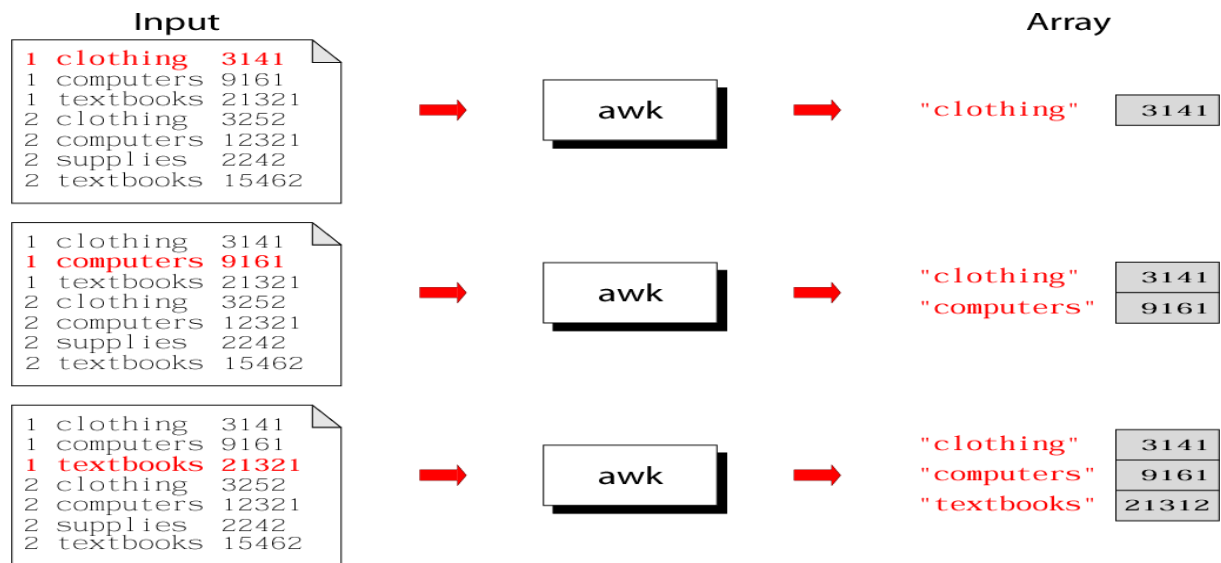


Illustration:processeachinputline

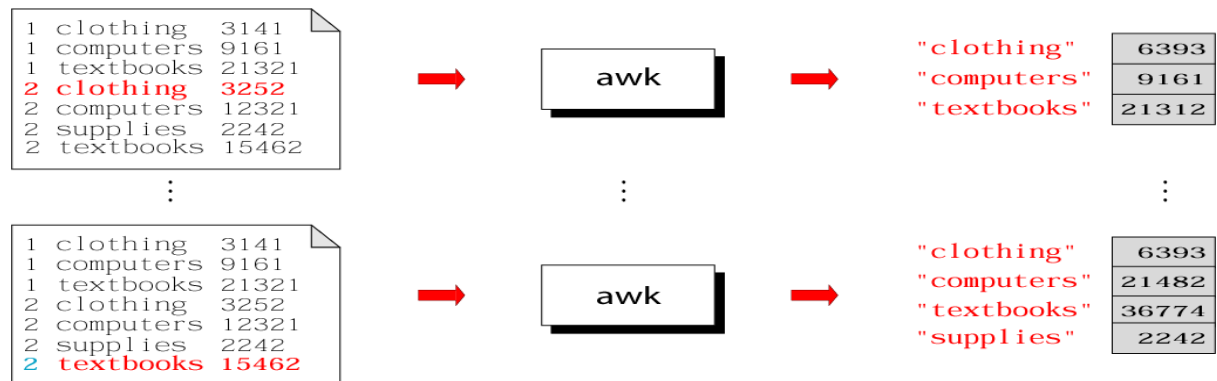

Summary:awk program

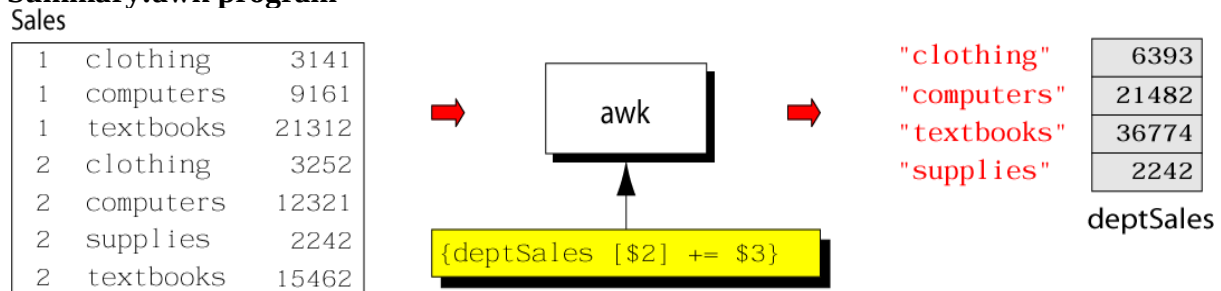

Example:completeprogram

```
%catsales.awk
{
    deptSales[$2]+=$3
}END
{
    for(x indeptSales)
```

```
    print x, deptSales[x]
}
```

%awk-fsales.awksales

Awkcontrolstructures

- Conditional
 - if-else
- Repetition
 - for
 - with counter
 - with arrayindex
 - while
 - do-while

also:break, continue

ifStatement

Syntax:

if (conditional expression)

statement-1

else

statement-2

Example:

if (NR < 3)

print\$2

else

print \$3

forLoopSyntax:

for(initialization;limit-test;update)statement

Example:

for(i = 1; i <= NR; i++)

{

total+=\$i

count++

}

forLoopforarrays

Syntax:

for(varinarray)

statement

Example:

for(x indeptSales)

{

print x, deptSales[x]

}

WhileLoop

Syntax:

while(logicalexpression) statement

Example:

i = 1

while(i<=NF)

```
{  
    print i,$i++  
}
```

do-while Loop

Syntax:

do

statement while (condition)

- statement is executed at least once, even if condition is false at the beginning

Example:

```
i = 1  
do {  
    print $i++  
} while (i <= 10)
```

loop control statements

- **break**
-

Shell Programming

The shell has similarities to the DOS command processor Command.com (actually Dos was design as a poor copy of UNIX shell), it's actually much more powerful, really a programming language in its own right.


A shell is always available even in the most basic UNIX installation. You have to go through the shell to get other programs to run. You can write programs using the shell. You use the shell to administrate your UNIX system. For example:

ls -al | more

is a short shell program to get a long listing of the present directory and route the output through the more command.

What is a Shell?

A shell is a program that acts as the interface between you and the UNIX system, allowing you to enter commands for the operating system to execute.

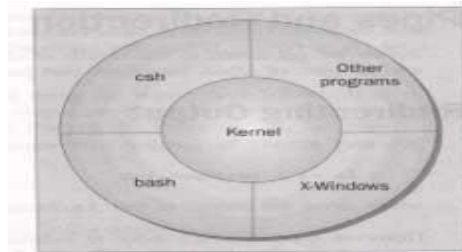

Here are some common shells.

Shell Name	A Bit of History
sh (Bourne)	The original shell.
csh , tcsh and zsh	The C shell, created by Bill Joy of Berkeley UNIX fame. Probably the second most popular shell after bash .
ksh , pdksh	The Korn shell and its public domain cousin. Written by David Korn.
bash	The Linux staple, from the GNU project. bash , or B ourne A gain S hell, has the advantage that the source code is available and even if it's not currently running on your UNIX system, it has probably been ported to it.
rc	More C than csh . Also from the GNU project.

Introduction-Working with Bourne Shell

- The Bourne shell, or sh, was the default Unix shell of Unix Version 7. It was developed by Stephen Bourne, of AT&T Bell Laboratories.
- A Unix shell, also called "the command line", provides the traditional user interface for the Unix operating system and for Unix-like systems. Users direct the operation of the computer by entering command input as text for a shell to execute.
- There are many different shells in use. They are
 - Bourne shell (sh)
 - C shell (csh)
 - Korn shell (ksh)

Bourne Again shell (bash)

- When we issue a command the shell is the first agency to acquire the information. It accepts and interprets user requests. The shell examines & rebuilds the commands & leaves the execution work to kernel. The kernel handles the h/w on behalf of these commands & all processes in the system.

-
- The shell is generally sleeping. It wakes up when an input is keyed in at the prompt. This input is actually input to the program that represents the shell.

Shell responsibilities

- | | |
|---------------------------------------|-------------------------------------|
| 1. Program Execution | 4. Pipeline Hookup |
| 2. Variable and Filename Substitution | 5. Environment Control |
| 3. I/O Redirection | 6. Interpreted Programming Language |

Program Execution:

- The shell is responsible for the execution of all programs that you request from your terminal.
- Each time you type a line into the shell, the shell analyzes the line and then determines what to do.
- The line that is typed to the shell is known more formally as the command line. The shell scans this command line and determines the name of the program to be executed and what arguments to pass to the program.
- Like any other programming language, the shell lets you assign values to variables. Whenever you specify one of these variables on the command line, preceded by a dollar sign, the shell substitutes the value assigned to the variable at that point.
- It is the shell's responsibility to take care of input and output redirection on the command line. It scans the command line for the occurrence of the special redirection characters <, >, or >>.
 - Just as the shell scans the command line looking for redirection characters, it also looks for the pipe character |. For each such character that it finds, it connects the standard output from the command preceding the | to the standard input of the one following the |. It then initiates execution of both programs.

Environment Control:

- The shell provides certain commands that let you customize your environment. Your environment includes home directory, the characters that the shell displays to prompt you to type in a command, and a list of the directories to be searched whenever you request that a program be executed.

Interpreted Programming Language:

- The shell has its own built-in programming language. This language is interpreted, meaning that the shell analyzes each statement in the language one line at a time and then executes it. This differs from programming languages such as C and FORTRAN, in which the programming statements are typically compiled into a machine-executable form before they are executed.
- Programs developed in interpreted programming languages are typically easier to debug and modify than compiled ones. However, they usually take much longer to execute than their compiled equivalents.

Pipes and Redirection

Pipes connect processes together. The input and output of UNIX programs can be redirected.

RedirectingOutput

The > operator is used to redirect output of a program. For example: `ls -l > lsoutput.txt`

redirects the output of the `ls` command from the screen to the file `lsoutput.txt`. To

append to a file, use the >> operator.

```
ps>>lsoutput.txt
```

RedirectingInput

You redirect input by using the < operator. For example: `more < killout.txt`

Pipes

We can connect processes together using the pipe operator (|). For example, the following program means run the `ps` program, sort its output, and save it in the file `pssort.out`

```
ps|sort >pssort.out
```

The `sort` command will sort the list of words in a textfile into alphabetical order according to the ASCII code set character order.

HereDocuments

A here document is a special way of passing input to a command from a shell script. The document starts and ends with the same leader after <<.

For example:

```
#!/bin/sh
cat<thisisahere
document
!FUNKY!
```

HowIt Works

It executes the here document as if it were input commands.

Running a Shell Script

You can type in a sequence of commands and allow the shell to execute them interactively, or you can store these commands in a file which you can invoke as a program.

InteractivePrograms

A quick way of trying out small code fragments is to just type in the shell script on the command line. Here is a shell program to compile only files that contain the string `POSIX`.


```
$ for file in *
> do
> if grep -l POSIX $file
> then
> more $file
> fi
> done
posix
This is a file with POSIX in it - treat it well
$
```

The Shell as a Programming Language Creating

a Script

To create a shell script first use a text editor to create a file containing the commands.

For example, type the following commands and save them as first.sh

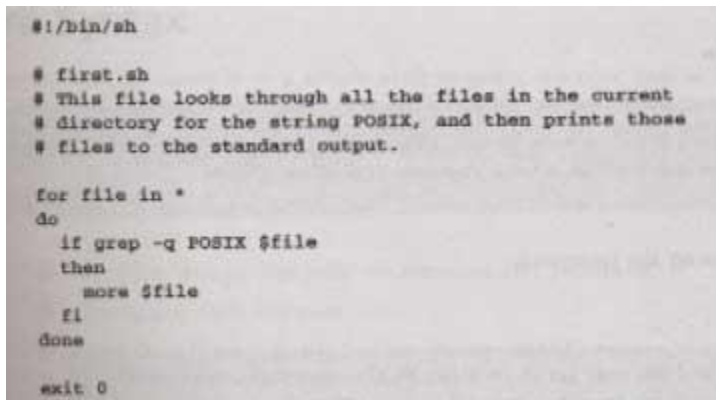

```
#!/bin/sh

# first.sh
# This file looks through all the files in the current
# directory for the string POSIX, and then prints those
# files to the standard output.

for file in *
do
    if grep -q POSIX $file
    then
        more $file
    fi
done

exit 0
```

Note: commands start with a #.

The line

#!/bin/sh

is special and tells the system to use the /bin/sh program to execute this program.

The command

exit 0

causes the script program to exit and return a value of 0, which means there were no errors.

Making a Script Executable

There are two ways to execute the script. 1) invoke the shell with the name of the script file as a parameter, thus:

/bin/sh first.sh

Or 2) change the mode of the script to executable and then after execute it by just typing its name.

chmod +x first.sh

first.sh

Actually, you may need to type:

./first.sh

to make the file execute unless the path variable has your directory in it.

Shell Syntax

The modern UNIX shell can be used to write quite large, structured programs.

Shell metacharacters

The shell consists of a large number of metacharacters. These characters play a vital role in Unix programming.

Types of metacharacters:

1. File substitution
2. I/O redirection
3. Process execution
4. Quoting metacharacters
5. Positional parameters

- 6. Special characters
- 7. Command substitution

Filename substitution:

These metacharacters are used to match the filenames in a directory.

Metacharacter significance

- * matches any no. of characters
- ? matches a single character
- [ijk] matches a single character either i, j, k
- [!ijk] matches a single character that is not i, j, k

Shell Variables

Variables are generally created when you first use them. By default, all variables are considered and stored as strings. Variable names are case sensitive.

```
$ salutation=Hello
$ echo $salutation
Hello
$ salutation="Yes Dear"
$ echo $salutation
Yes Dear
$ salutation=7+5
$ echo $salutation
7+5
```

- ☐ You can define & use variables both in the command line and shell scripts. These variables are called shell variables.
- ☐ No type declaration is necessary before you can use a shell variable.
- ☐ Variables provide the ability to store and manipulate the information within the shell program. The variables are completely under the control of user.
- ☐ Variables in Unix are of two types.
- 1) User-defined variables:** Generalized form:
 - variable=value.
 - Eg: \$x=10
 - \$echo \$x
 - 10
- ☐ To remove a variable use unset. **\$unset x**
- ☐ All shell variables are initialized to null strings by default. To explicitly set null values use
 - x= or x=," or x=""
- ☐ To assign multiword strings to a variable use \$msg=„uhave a mail“

2) Environment Variables

- ☐ They are initialized when the shell script starts and normally capitalized to distinguish them from user-defined variables in scripts
- ☐ To display all variables in the local shell and their values, type the **set** command
- ☐ The **unset** command removes the variable from the current shell and sub shell

EnvironmentVariables	Description
\$HOME	Homedirectory
\$PATH	Listofdirectoriestosearchfor commands
\$PS1	Commandprompt
\$PS2	Secondaryprompt
\$SHELL	Currentloginshell
\$0	Nameof theshellscript
\$#	No.ofparameterspassed
\$\$	ProcessIDof theshellscript

CommandsubstitutionandShellcommands:

read:

- The read statement is a tool for taking input from the user i.e. making scriptsinteractive. It is used with one or more variables. Input supplied through the standard input is read into these variables. □

\$readname

Whateveruenteredisstoredinthevariablename.

printf: Printfisusedtoprintformatted o/p.

printf "format" arg1 arg2 ...

Eg:\$printf"Thisisanumber:%d\n"10 This
is a number: 10

\$

Print supports conversions specification characters like %d,%s,%x,%o....Exit status of a command:

- Every command returns a value after execution. This value is called the exit status or return value of a command.
- This value is said to be true if the command executes successfully and false if it fails. □
- There is a special parameter used by the shell it is the \$? . It stores the exit status of a command. □

exit:

- The exit statement is used to prematurely terminate a program. When this statement is encountered in a script, execution is halted and control is returned to the calling program- in most cases the shell.
- U don't need to place exit at the end of every shell script because the shell knows when script execution is complete. □

set:

- Set is used to produce the list of currently defined variables. □ \$set
- Set is used to assign values to the positional parameters. □ \$set welcome to Unix

The do-nothing(:) Command

- It is a null command. □
- In some older shell scripts, colon was used at the start of a line to introduce a comment, but modern scripts use # now. □

exp

- The expr command evaluates its arguments as an expression: □

```
$ expr 8 + 6
14
$x=`expr 12 / 4`
$ echo $x
```

export:

- There is a way to make the value of a variable known to a subshell, and that's by exporting it with the export command. The format of this command is □

export variables

- where variables is the list of variable names that you want exported. For any sub shells that get executed from that point on, the value of the exported variables will be passed down to the sub shell. □

eval:

- eval scans the command line twice before executing it. General form for eval is eval command-line □

Eg:

\$ cat last

eval echo \\$\$#

\$ lastonetwothreefour four

\${n}

If you supply more than nine arguments to a program, you cannot access the tenth and greater arguments with \$10, \$11, and so on.

\${n} must be used. So to directly access argument 10, you must write

\${10}

Shift command:

The shift command allows u to effectively left shift your positional parameters. If u execute the command

Shift

whatever was previously stored inside \$2 will be assigned to \$1, whatever was previously stored in \$3 will be assigned to \$2, and so on. The old value of \$1 will be irretrievably lost.

The Environment-Environment Variables

It creates the variables `salutation`, displays its value, and some parameter variables.

- When a shell starts, some variables are initialized from values in the environment. Here is a sample of some of them.

Environment Variable	Description
<code>\$HOME</code>	The home directory of the current user.
<code>\$PATH</code>	A colon-separated list of directories to search for commands.
<code>\$PS1</code>	A command prompt, usually <code>\$</code> .
<code>\$PS2</code>	A secondary prompt, used when prompting for additional input, usually <code>></code> .
<code>\$IFS</code>	An input field separator. A list of characters that are used to separate words when the shell is reading input, usually space, tab and newline characters.

Environment Variable	Description
<code>\$0</code>	The name of the shell script
<code>\$#</code>	The number of parameters passed.
<code>\$\$</code>	The process ID of the shell script, often used inside a script for generating unique temporary filenames, for example <code>/tmp/junk_\$\$</code> .

Parameter Variables

- If your script is invoked with parameters, some additional variables are created.

Parameter Variable	Description
<code>\$1, \$2, ...</code>	The parameters given to the script.
<code>\$*</code>	A list of all the parameters, in a single variable, separated by the first character in the environment variable <code>IFS</code> .
<code>\$@</code>	A subtle variation on <code>\$*</code> , that doesn't use the <code>IFS</code> environment variable.

Quoting

Normally, parameters are separated by white space, such as a space. Single quote marks can be used to enclose values containing space(s). Type the following into a file called `quot.sh`

```
#!/bin/sh

myvar="Hi there"

echo $myvar
echo "$myvar"
echo '$myvar'
echo \myvar

echo Enter some text
read myvar

echo '$myvar' now equals $myvar
exit 0
```

make sure to make it executable by typing the command:

< `chmod +x`

quot.sh The result of executing the file is:

```
Hi there
Hi there
$myvar
$myvar
Enter some text
Hello World
$myvar now equals Hello World
```

How It Works

The variable `myvar` is created and assigned the string `Hi there`. The content of the variable is displayed using the `echo $`. Double quotes don't effect echoing the value. Single quotes and backslash do.

The `test`, or `[]` Command

Here is how to check for the existence of the file `fred.c` using the `test` and using the `[]` command.

```
if test -f fred.c
then
...
fi
```

We can also write it like this:

```
if [ -f fred.c ]
then
...
fi
```

You can even place the `then` on the same line as the `if`, if you add a semicolon before the word `then`.

```
if [ -f fred.c ]; then
...
fi
```

Here are the condition types that can be used with the `test` command. There are string comparison.

String Comparison	Result
<code>string</code>	True if the string is not an empty string.
<code>string1 = string2</code>	True if the strings are the same.
<code>string1 != string2</code>	True if the strings are not equal.
<code>-n string</code>	True if the string is not null .
<code>-z string</code>	True if the string is null (an empty string).

There are arithmetic comparison.

Arithmetic Comparison	Result
<code>expression1 -eq expression2</code>	True if the expressions are equal.
<code>expression1 -ne expression2</code>	True if the expressions are not equal.
<code>expression1 -gt expression2</code>	True if expression1 is greater than expression2 .
<code>expression1 -ge expression2</code>	True if expression1 is greater than or equal to expression2 .
<code>expression1 -lt expression2</code>	True if expression1 is less than expression2 .
<code>expression1 -le expression2</code>	True if expression1 is less than or equal to expression2 .
<code>! expression</code>	The ! negates the expression and returns true if the expression is false , and vice versa.

There are file conditions.

File Conditional	Result
-d file	True if the file is a directory.
-e file	True if the file exists.
-f file	True if the file is a regular file.
-g file	True if set-group-id is set on file.
-r file	True if the file is readable.
-s file	True if the file has non-zero size.
-u file	True if set-user-id is set on file.
-w file	True if the file is writeable.
-x file	True if the file is executable.

Control Structures

The shell has a set of control structures.

if

The if statement is very similar to other programming languages except it ends with **fi**.

```
condition
then
    statements
else
    statements
fi
```

elif

The **elif** is better known as "else if". It replaces the else part of an if statement with another if statement. You can try it out by using the following script.

```
#!/bin/sh
echo "Is it morning? Please answer yes or no" read
timeofday
if [ $timeofday="yes" ]
then
    echo "Good morning"
elif [ $timeofday="no" ]; then
    echo "Good afternoon"
echo "Sorry, $timeofday not recognized. Enter yes or no"
exit 1 fi
exit 0
```

How It Works

The above does a second test on the variable `timeofday` if it isn't equal to `yes`.

A Problem with Variables

If a variable is set to null, the statement

```
if [ $timeofday="yes" ]
```

looks like

```
if [ ="yes" ]
```

which is illegal. This problem can be fixed by using double quotes around the variable name. `if [ "$timeofday" = "yes" ]`

for

The **for** construct is used for looping through a range of values, which can be any set of strings.

The syntax is:

```
for variable in values
do
    statements
done
```

Try out the following script:

```
#!/bin/sh
for foo in bar fud 43
do
    echo $foo
done
exit 0
```

When executed, the output should be:

```
bar
fud
43
```

How It Works

The above example creates the variable `foo` and assigns it a different value each time around the `for` loop.

How It Works

Here is another script which uses the `$(command)` syntax to expand a list to `chap3.txt`, `chap4.txt`, and `chap5.txt` and print the files.

```
#!/bin/sh
for file in $(ls chap[345].txt); do
    lpr $file
done
```

while

While loops will loop as long as some condition exist. Of course something in the body statements of the loop should eventually change the condition and cause the loop to exit. Here is the `while` loop syntax.

```
while condition
do
    statements
done
```

Here is a `while` loop that loops 20 times.

```
#!/bin/sh
foo=1
while [ "$foo" -le 20 ]
do
    echo "Here we go again"
    foo=$((foo+1))
done
exit 0
```

How It Works

The above script uses the `[]` command to test `foo` for `<=` the value 20. The line `foo=$((foo+1))` increments the value of `foo` each time the loop executes..

until

The `until` statement loops until a condition becomes true!

Its syntax:

```
until condition
do
    statements
done
```

Here is a script using until.

```
#!/bin/sh
until who | grep "$1" > /dev/null do
    sleep 60
done
# now ring the bell and announce the expected user. echo -e
\\a
echo "*****$1 has just loogged in*****" exit 0
```

case

The case statement allows the testing of a variable for more than one value. The case statement ends with the word esac. Its syntax is:

```
case variable in
    pattern[|pattern]...) statements;;
    pattern[|pattern] ...) statements;;
    ...
esac
```

Here is a sample script using a case statement:

```
#!/bin/sh
echo "Is it morning? Please answer yes or no" read
timeofday
case "$timeofday" in
    "yes") echo "Good Morning";;
    "no") echo "Good Afternoon";;
    "y" ) echo "Good Morning";;
    "n" ) echo "Good Afternoon";;
    *) echo "Soory, answer not recognized";;
esac
exit 0
```

The value in the variable timeofday is compared to various strings. When a match is made, the associated echo command is executed.

Here is a case where multiple strings are tested at a time, to do some action. case

```
"$timeofday" in
    "yes"|"y"|"yes"|"YES") echo "good Morning";; "n"* |
    "N"* ) <echo "Good Afternoon";;
    *) <echo "Sorry, answer not recognized";;
0esac
```

How It Works

The above has ever string tested for each possible statement.

Here is a case statement that executes multiple statements for each case.

```

case "$timeofday" in
    "yes" | "y" | "Yes" | "YES" )
        echo "GoodMorning"
        echo "Upbrightand earlythismorning"
        ;;
    [nN]*)
        echo "GoodAfternoon"
        ;;
    *)
        echo "Sorry,answernotrecognized"
        echo "Please answer yes or noo"exit
        1
        ;;
esac

```

HowIt Works

Whenamatchisfoundtothevariablevalueoftimeofday,allthestatementsuptothe
;;are executed.

Arithmeticinshell

The\$((...))isabetteralternativetotheexprcommand,whichallowssimple arithmetic
commands to be processed.

```
x=$((x+1))
```

ParameterExpansion

Using{ }aroundavariabletoprotectitagainstexpansion. #!/bin/sh

```

foriin12 do
    my_secret_process${i}_tmp
done

```

Herearesomeof theparameter expansion

Parameter Expansion	Description
<code>\$(param: -default)</code>	If param is null, set it to the value of default .
<code>\$(#param)</code>	Gives the length of param .
<code>\$(param%word)</code>	From the end, removes the smallest part of param that matches word and returns the rest.
<code>\$(param%%word)</code>	From the end, removes the longest part of param that matches word and returns the rest.
<code>\$(param#word)</code>	From the beginning, removes the smallest part of param that matches word and returns the rest.
<code>\$(param##word)</code>	From the beginning, removes the longest part of param that matches word and returns the rest.

HowIt Works

The tryit out exercise uses parameter expansion to demonstrate how parameter expansion works.

ShellScriptExamples

Example

```
#!/bin/sh
echo "Is it morning? (Answer yes or no)"
read timeofday
if [ $timeofday = "yes" ]; then
    echo "Good Morning"
else
    echo "Good Afternoon"
fi
exit 0
```

elif-Doing further Checks

```
#!/bin/sh
echo "Is it morning? Please answer yes or no"
read timeofday
if [ $timeofday = "yes" ]; then
    echo "Good Morning"
elif [ $timeofday = "no" ]; then
    echo "Good Afternoon"
else
    echo "Wrong answer! Enter yes or no"
    exit 1
    exit 0
fi
```

InterruptProcessing-trap

The trap command is used for specifying the actions to take on receipt of signals.

It syntax is:

trap command signal

Here are some of the signals.

Signal	Description
HUP (1)	Hang up; usually sent when a terminal goes off line, or a user logs out.
INT (2)	Interrupt; usually sent by pressing <i>Ctrl-C</i> .
QUIT (3)	Quit; usually sent by pressing <i>Ctrl-^</i> .
ABRT (6)	Abort; usually sent on some serious execution error.
ALRM (14)	Alarm; usually used for handling time-outs.
TERM (15)	Terminate; usually sent by the system when it's shutting down.

HowIt Works

The try it out section has you type in a shell script to test the trap command. It creates a file and keeps saying that it exists until you cause a control-C interrupt. It does it all again.

Functions

You can define functions in the shell. The syntax is:

```
function_name () {  
    statements  
}
```

Here is a sample function and its execution.

```
#!/bin/sh  
foo() {  
    echo "Function foo is executing"  
}  
echo "script starting" fo  
0  
echo "script ended" exit  
0
```

How It Works

When the above script runs, it defines the function foo, then script echos script starting, then it runs the function foo which echos Function foo is executing, then it echos script ended.

Here is another sample script with a function init. Save it as my_name

```
#!/bin/sh  
yes_or_no(){  
    echo "Parameters are $" while  
    true  
    do  
        echo -n "Enter yes or no"  
        read x  
        case "$x" in  
            y|yes) return 0;;  
            n|no) return 1;;  
            *) echo "Answer yes or no"  
        esac  
    done }  
echo "Original parameters are $" if  
yes_or_no "Is your name $1" then  
    echo "Hi $1"  
else  
    echo "Never mind"  
fi  
0  
exit  
0
```

How It Works When my_name is executed with the statement: my_name

Rick and Neil

gives the output of:

```
Original parameters are Rick and Neil  
Parameters are Is your name Rick  
Enter yes or no
```

Commands

You can execute normal command and built-in commands from a shell script.

Built-in commands are defined and only run inside of the script. **break**

It is used to escape from an enclosing for, while, or until loop before the controlling condition has been met.

The Command The colon command is a null command. It can be used for an alias for true..

Continue

The continue command makes the enclosing for, while, or until loop continue at the next iteration.

The Command

The dot command executes the command in the current shell:

. shell_script

echo

The echo command simply outputs a string to the standard output device followed by a newline character.

Eval The eval command evaluates arguments and gives the results.

exec

The exec command can replace the current shell with a different program. It can also modify the current file descriptors.

exit The exit command causes the script to exit with the exit code. An exit code of 0 means success.

Here are some other codes.

Exit Code	Description
126	The file was not executable.
127	A command was not found.
128 and above	A signal occurred.

export The export command makes the variable named as its parameter available in subshells.

expr The expr command evaluates its arguments as an expression.

0x=`expr \$x+1`

Here are some of its expression evaluations

Expression	Evaluation	Description
expr1	 expr2	expr1 if expr1 is non-zero, otherwise expr2 .
expr1	& expr2	Zero if either expression is zero, otherwise expr1 .
expr1	= expr2	Equal.
expr1	> expr2	Greater than.
expr1	>= expr2	Greater or equal to.
expr1	< expr2	Less than.
expr1	<= expr2	Less or equal to.
expr1	!= expr2	Not equal.
expr1	+ expr2	Addition.
expr1	- expr2	Subtraction.
expr1	* expr2	Multiplication.
expr1	/ expr2	Integer division.
expr1	% expr2	Integer modulo.

printf

The printf command is only available in more recent shells. It works similar to the echo command. Its general form is:

printf "formatstring" parameter1 parameter2...

Here are some characters and format specifiers.

Escape Sequence	Description
\\	Backslash character
\a	Alert (ring the bell or beep)
\b	Backspace character
\f	Form feed character
\n	Newline character
\r	Carriage return
\t	Tab character
\v	Vertical tab character
\ooo	The single character with octal value ooo

Conversion Specifier	Description
d	Output a decimal number
c	Output a character
s	Output a string
%	Output the % character

return

The return command causes function to return. It can have a value parameter which it returns.

set

The set command sets the parameter variables for the shell.

shift

The shift command moves all the parameter variables down by one, so \$2 becomes \$1, \$3 becomes \$2, and so on.

unset

The unset command removes variables or functions from the environment.

Command Execution

The result of \$(command) is simply the output string from the command, which is then available to the script.

Debugging Shell Scripts

When an error occurs in a script, the shell prints out the line number with an error. You can use the set command to set various shell options. Here are some of them.

Command Line Option	set Option	Description
sh -n <script>	set -o noexec set -n	Checks for syntax errors only; doesn't execute commands.
sh -v <script>	set -o verbose set -v	Echoes commands before running them.
sh -x <script>	set -o xtrace set -x	Echoes commands after processing on the command line.
.	set -o nounset set -u	Gives an error message when an undefined variable is used.

UnitII–FilesandDirectories

Workingwith Files

Inthischapterwelearnhowto create,open,read,write,andclosefiles.

UNIXFile Structure

InUNIX,everythingisa file.

Programscanusediskfiles,serialports,printersandotherdevicesintheexactlythesame way as they would use a file.

Directories,too, are special sorts of files.


Directories

Aswellasitscontents, afilehasanameand'administrativeinformation',i.e.the file's creation/modification date and its permissions.

Thepermissionsarestoredinthe**inode**,whichalsocontainsthelengthofthefileand where on the disc it's stored.

Adirectoryis afilethatholdstheinodesandnamesofotherfiles. Files are arranged in directories, which also contain subdirectories.

Auser,**neil**,usuallyhashisfiles storesin a 'home'directory, perhaps/**home/neil**.

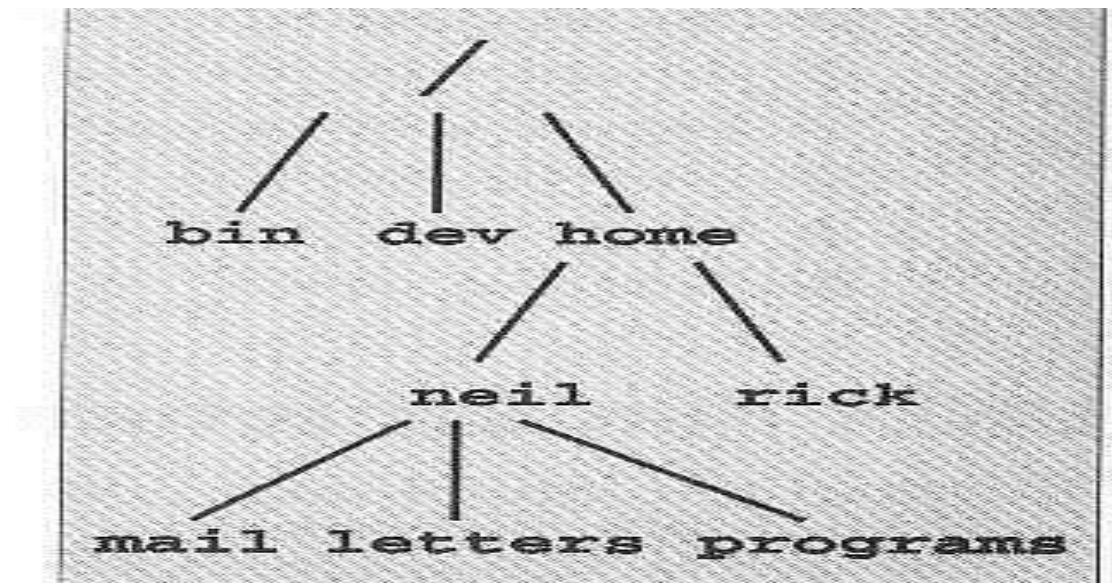

Filesand Devices

Evenhardwaredevicesarerepresented(mapped) byfilesinUNIX. Forexample, as **root**,youmountaCD-ROMdriveasa file,

```
$mount -t iso9660/dev/hdc/mnt/cd_rom  
$cd /mnt/cd_rom
```

/dev/console-this device represents the system console.

/dev/tty-This special file is an alias (logical device) for controlling terminal (keyboard and screen, or window) of a process.

/dev/null-This is the null device. All output written to this device is discarded.

System Calls and Device Drivers


System calls are provided by UNIX to access and control files and devices. A number of **device drivers** are part of the kernel.

The system calls to access the device drivers include:

- **open** Open a file or device.
- **read** Read from an open file or device.
- **write** Write to a file or device.
- **close** Close the file or device.
- **ioctl** Specific control the device.

Library Functions

To provide a higher level interface to device and disk files, UNIX provides a number of standard libraries.

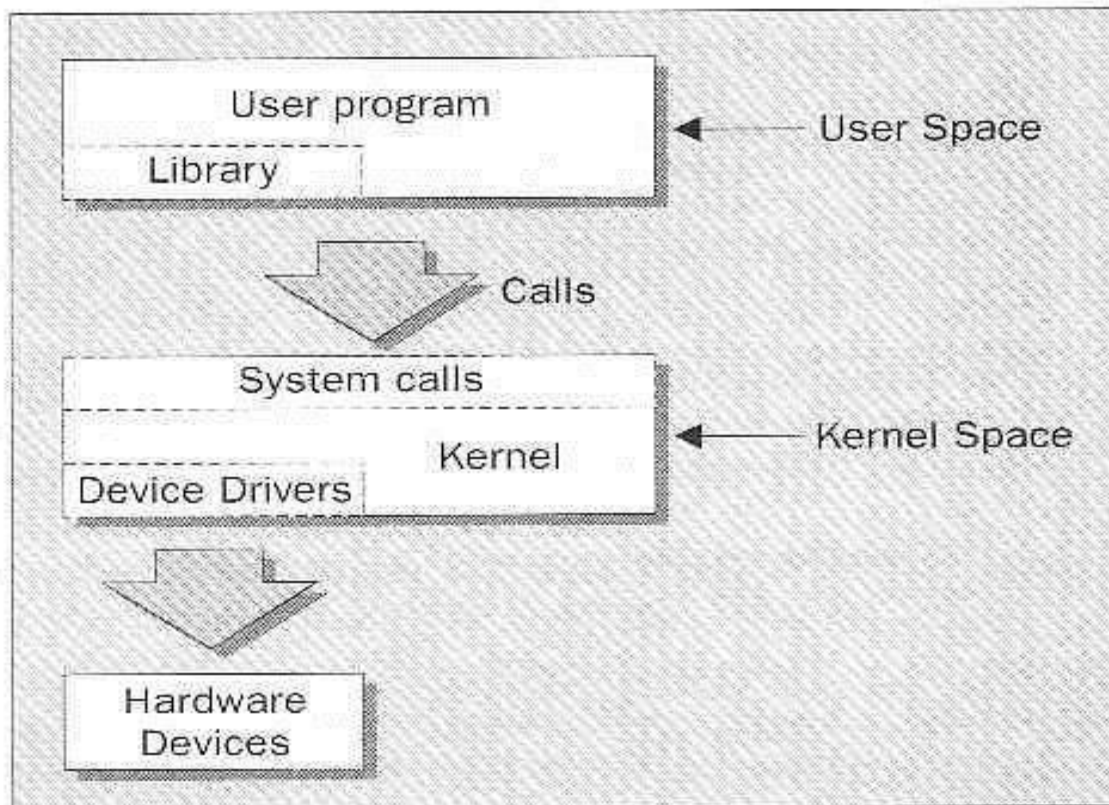

Low-level File Access

Each running program, called a **process**, has associated with it a number of file descriptors.

When a program starts, it usually has three of these descriptors already opened. These are: The **write** system call arranges for the first **n bytes** bytes from **buf** to be written to the file associated with the file descriptor **files**.

With this knowledge, let's write our first program, **simple_write.c**:

```
#include <unistd.h>

int main()
{
    if ((write(1, "Here is some data\n", 18)) != 18)
        write(2, "A write error has occurred on file descriptor 1\n");
    exit(0);
}
```

```
#include <unistd.h>

size_t write(int fildes, const void *buf, size_t nbytes);
```

```
$ simple_write
Here is some data
$
```

read

```
#include <unistd.h>

size_t read(int fildes, void *buf, size_t nbytes);
```

The **read** system call reads up to **nbytes** of data from the file associated with the file descriptor **fildes** and places them in the data area **buf**.

This program, **simple_read.c**, copies the first 128 bytes of the standard input to the standard output.

Strictly speaking, we don't need to include **sys/types.h** and **sys/stat.h** on POSIX systems, but they may be necessary on some UNIX systems.

```

#include <unistd.h>

int main()
{
    char buffer[128];
    int nread;

    nread = read(0, buffer, 128);
    if (nread == -1)
        write(2, "A read error has occurred\n", 26);

    if ((write(1, buffer, nread)) != nread)
        write(2, "A write error has occurred\n", 27);

    exit(0);
}

```

open

To create a new file descriptor we need to use the **open** system call.

```

#include <fcntl.h>
#include <sys/types.h>
#include <sys/stat.h>

int open(const char *path, int oflags);
int open(const char *path, int oflags, mode_t mode);

```

open establishes an access path to a file or device.

The name of the file or device to be opened is passed as a parameter, **path**, and the **oflags** parameter is used to specify actions to be taken on opening the file.

The **oflags** are specified as a bitwise OR of a mandatory file access mode and other optional modes. The **open** call must specify one of the following file access modes:

Mode	Description
O_RDONLY	Open for read-only
O_WRONLY	Open for write-only
O_RDWR	Open for reading and writing

The call may also include a combination (bitwise OR) of the following optional modes in the **oflags** parameter:

- **O_APPEND** Place written data at the end of the file.
- **O_TRUNC** Set the length of the file to zero, discarding existing contents.
- **O_CREAT** Creates the file, if necessary, with permissions given in **mode**.
- **O_EXCL** Used with **O_CREAT**, ensures that the caller creates the file. This is atomic, i.e. it's performed with just one function call. This prevents two programs creating the file at the same time. If the file already **open** will fail.

When we create a file using the **O_CREAT** flag with **open**, we must use the three-parameter form. **mode**, the third parameter, is made from a bitwise OR of the flags defined in the header file **sys/stat.h**. These are:

- **S_IRUSR** Read permission, owner.
- **S_IWUSR** Write permission, owner.
- **S_IXUSR** Execute permission, owner.
- **S_IRGRP** Read permission, group.
- **S_IWGRP** Write permission, group.
- **S_IXGRP** Execute permission, group.
- **S_IROTH** Read permission, others.
- **S_IWOTH** Write permission, others.
- **S_IXOTH** Execute permission, others.

For example

```
open ("myfile", O_CREAT, S_IRUSR|S_IXOTH);
```

Has the effect of creating a file called **myfile**, with read permission for the owner and execute permission for others, and only those permissions.

```
$ ls -ls myfile
0 -r-----x  1 neil      software      0 Sep 22 08:11 myfile*
```

umask

The **umask** is a system variable that encodes a mask for file permissions to be used when a file is created. You can change the variable by executing the **umask** command to supply a new value. The value is a three-digit octal value. Each digit is the result of ANDing values from 1, 2, or 4.

Digit	Value	Meaning
1	0	No user permissions are to be disallowed.
	4	User read permission is disallowed.
	2	User write permission is disallowed.
	1	User execute permission is disallowed.

Digit	Value	Meaning
2	0	No group permissions are to be disallowed.
	4	Group read permission is disallowed.
	2	Group write permission is disallowed.
	1	Group execute permission is disallowed.
3	0	No other permissions are to be disallowed.
	4	Other read permission is disallowed.
	2	Other write permission is disallowed.
	1	Other execute permission is disallowed.

Forexample,toblock'group'writeand execute, and'other'write, the**umask** would be:

Digit	Value
1	0
2	2
	1
3	2

Valuesfor eachdigitare ANDedtogether;sodigit2 willhave2&1,giving3.Theresulting **umask**is**032**.

close

```
#include <unistd.h>
int close(int fildes);
```

Weuse **close**to terminatetheassociation betweenafiledescriptor,**fildes**,and its file.
ioctl

```
#include <unistd.h>
int ioctl(int fildes, int cmd, ...);
```

devices, their descriptors and configuring underlying services.

ioctl performs the function indicated by **cmd** on the object referenced by the descriptor **files**. **Try It**

Out - A File Copy Program

We now know enough about the **open**, **read** and **write** system calls to write a low-level program, **copy_system.c**, to copy one file to another, character by character.

We'll do this in a number of ways during this chapter to compare the efficiency of each method. For brevity, we'll assume that the input file exists and the output file does not. Of course, in real-life programs, we would check that these assumptions are valid!

```
#include <unistd.h>
#include <sys/stat.h>
#include <fcntl.h>

int main()
{
    char c;
    int in, out;

    in = open("file.in", O_RDONLY);
    out = open("file.out", O_WRONLY|O_CREAT, S_IRUSR|S_IWUSR);
    while(read(in, &c, 1) == 1)
        write(out, &c, 1);

    exit(0);
}
```

*Note that the **#include <unistd.h>** line must come first as it defines flags regarding POSIX compliance that may affect other include files.*

Running the program will give the following:

```
$ time copy_system
4.67user 146.90system 2:32.57elapsed 99%CPU

...
$ ls -ls file.in file.out
1029 -rw-r--r-    1 neil    users      1048576 Sep 17 10:46 file.in
1029 -rw-----    1 neil    users      1048576 Sep 17 10:51 file.out
```

We used the UNIX **time** facility to measure how long the program takes to run. It took 2

and onehalf minutes to copythe 1Mb file.

We can improve by copying in larger blocks. Here is the improved **copy_block.c** program.

```
#include <unistd.h>
#include <sys/stat.h>
#include <fcntl.h>

int main()
{
    char block[1024];
    int in, out;
    int nread;

    in = open("file.in", O_RDONLY);
    out = open("file.out", O_WRONLY|O_CREAT, S_IRUSR|S_IWUSR);
    while((nread = read(in, block, sizeof(block))) > 0)
        write(out, block, nread);

    exit(0);
}
```

Now try the program, first removing the old output file:

```
$ rm file.out
$ time copy_block
0.01user 1.09system 0:01.90elapsed 57%CPU
...
$ ls -ls file.in file.out
1029 -rw-r--r--  1 neil  users  1048576 Sep 17 10:46 file.in
1029 -rw-----  1 neil  users  1048576 Sep 17 10:57 file.out
```

The revised program took under two seconds to do the copy.

Other System Calls for Managing Files

Here are some system calls that operate on these low-level file descriptors.

lseek

```
#include <unistd.h>

#include <sys/types.h>

off_t lseek(int fildes, off_t offset, int whence);
```

The **lseek** system call sets the read/write pointer of a file descriptor, **fildes**. You use it to set where in the file the next read or write will occur.

The **offset** parameter is used to specify the position and the **whence** parameter specifies how the offset is used.

whence can be one of the following:

- **SEEK_SET** **offset** is an absolute position
- **SEEK_CUR** **offset** is relative to the current position
- **SEEK_END** **offset** is relative to the end of the file

fstat, stat and lstat

```
#include <unistd.h>
#include <sys/stat.h>
#include <sys/types.h>

int fstat(int fd, struct stat *buf);
int stat(const char *path, struct stat *buf);
int lstat(const char *path, struct stat *buf);
```

*Note that the inclusion of **sys/types.h** is deemed 'optional, but sensible'.*

The **fstat** system call returns status information about the file associated with an open file descriptor. The members of the structure, **stat**, may vary between UNIX systems, but will include:

stat Member	Description
st_mode	File permissions and file type information.
st_ino	The inode associated with the file.
st_dev	The device the file resides on.
st_uid	The user identity of the file owner.
st_gid	The group identity of the file owner.
st_atime	The time of last access.
st_ctime	The time of last change to mode, owner, group or content.
st_mtime	The time of last modification to contents.
st_nlink	The number of hard links to the file.

The permissions flags are the same as for the **open** system call above. File-type flags include:

- **S_IFBLK** Entry is a block special device.
- **S_IFDIR** Entry is a directory.
- **S_IFCHR** Entry is a character special device.
- **S_IFIFO** Entry is a FIFO (named pipe).
- **S_IFREG** Entry is a regular file.
- **S_IFLNK** Entry is a symbolic link.

Other mode flags include:

- **S_ISUID** Entry has **setUID** on execution.
- **S_ISGID** Entry has **setGID** on execution.

Masks to interpret the **st_mode** flags include:

- **S_IFMT** File type.
- **S_IRWXU** User read/write/execute permissions.
- **S_IRWXG** Group read/write/execute permissions.
- **S_IRWXO** Others read/write/execute permissions.

There are some macros defined to help with determining file types. These include:

- **S_ISBLK** Test for block special file.
- **S_ISCHR** Test for character special file.
- **S_ISDIR** Test for directory.
- **S_ISFIFO** Test for FIFO.
- **S_ISREG** Test for regular file.
- **S_ISLNK** Test for symbolic link.

To test that a file doesn't represent a directory and has execute permission set for the owner and no other permissions, we can use the test:

```

struct stat statbuf;
mode_t modes;

stat("filename",&statbuf);
modes = statbuf.st_mode;

if(!S_ISDIR(modes) && (modes & S_IRWXU) == S_IXUSR)
    ...

```

dup and dup2

```

#include <unistd.h>

int dup(int fildes);
int dup2(int fildes, int fildes2);

```

The **dup** system calls provide a way of duplicating a file descriptor, giving two or more, different descriptors that access the same file.

The Standard I/O Library

The standard I/O library and its header file **stdio.h**, provide a versatile interface to low-level I/O system calls.

Three file streams are automatically opened when a program is started. They are **stdin**, **stdout**, and **stderr**.

Now, let's look at:

- **fopen, fclose**
- **fread, fwrite**
- **fflush**
- **fseek**
- **fgetc, getc, getchar**
- **fputc, putc, putchar**

- `fgets, gets`
- `printf, fprintf` and `sprintf`
- `scanf, fscanf` and `sscanf`

fopen

```
#include <stdio.h>

FILE *fopen(const char *filename, const char *mode);
```

The **fopen** library function is the analog of the low level **open** system call.

fopen opens the file named by the **filename** parameter and associates a stream with it. The **mode** parameter specifies how the file is to be opened. It's one of the following strings:

- | | |
|---|---|
| ➤ <code>"r"</code> or <code>"rb"</code> | Open for reading only |
| ➤ <code>"w"</code> or <code>"wb"</code> | Open for writing, truncate to zero length |
| ➤ <code>"a"</code> or <code>"ab"</code> | Open for writing, append to end of file |
| ➤ <code>"r+"</code> or <code>"rb+"</code> or <code>"r+b"</code> | Open for update (reading and writing) |
| ➤ <code>"w+"</code> or <code>"wb+"</code> or <code>"w+b"</code> | Open for update, truncate to zero length |
| ➤ <code>"a+"</code> or <code>"ab+"</code> or <code>"a+b"</code> | Open for update, append to end of file |

If successful, **fopen** returns a non-null **FILE*** pointer.

fread

```
#include <stdio.h>

size_t fread(void *ptr, size_t size, size_t nitems, FILE *stream);
```

The **fread** library function is used to read data from a file stream. Data is read into a data buffer given by **ptr** from the stream, **stream**.

fwrite

```
#include <stdio.h>

size_t fwrite (const void *ptr, size_t size, size_t nitems, FILE *st
```

The **fwrite** library call has a similar interface to **fread**. It takes data records from the specified

data buffer and writes them to the output stream.

fclose

```
#include <stdio.h>

int fclose(FILE *stream);
```

The **fclose** library function closes the specified **stream**, causing any unwritten data to be written.

fflush

```
#include <stdio.h>

int fflush(FILE *stream);
```

The **fflush** library function causes all outstanding data on a file stream to be written immediately.

fseek

```
#include <stdio.h>

int fseek(FILE *stream, long int offset, int whence);
```

The **fseek** function is the file stream equivalent of the **lseek** system call. It sets the position in the stream for the next read or write on that stream.

fgetc,getc, getchar

```
#include <stdio.h>

int fgetc(FILE *stream);
int getc(FILE *stream);
int getchar();
```

The **fgetc** function returns the next byte, as a character, from a file stream. When it reaches the end of file, it returns **EOF**.

The **getc** function is equivalent to **fgetc**, except that you can implement it as a macro.

The **getchar** function is equivalent to **getc(stdin)** and reads the next character from the standard input.

fputc,putc, putchar

```
#include <stdio.h>

int fputc(int c, FILE *stream);
int putc(int c, FILE *stream);
int putchar(int c);
```

The **fputc** function writes a character to an output file stream. It returns the value it has written, or **EOF** on failure.

The function **putc** is equivalent to **fputc**, but you may implement it as a macro.

The **putchar** function is equivalent to **putc(c, stdout)**, writing a single character to the standard output. **fgets, gets**

```
#include <stdio.h>

char *fgets(char *s, int n, FILE *stream);
char *gets(char *s);
```

The **fgets** function reads a string from an input file stream. It writes characters to the string pointed to by **s** until a newline is encountered, **n-1** characters have been transferred or the end of file is reached.

Formatted Input and Output

There are library functions for producing output in a controlled fashion.

printf, fprintf and sprintf

```
#include <stdio.h>

int printf(const char *format, ...);
int sprintf(char *s, const char *format, ...);
int fprintf(FILE *stream, const char *format, ...);
```

The **printf** family of functions format and output a variable number of arguments of different types. Ordinary characters are passed unchanged into the output. Conversion specifiers cause **printf** to fetch and format additional arguments passed as parameters. They are started with a **%**.

For example

```
printf("Some numbers: %d, %d, and %d\n", 1, 2, 3);
```

which produces, on the standard output:

Some numbers: 1, 2, and 3

- **%d, %i** Print an integer in decimal.
- **%o, %x** Print an integer in octal, hexadecimal.
- **%c** Print a character.
- **%s** Print a string.
- **%f** Print a floating point (single precision) number.
- **%e** Print a double precision number, in fixed format.
- **%g** Print a double in a general format.

Here are some of the most commonly used conversion specifiers:

Here's another example:

```
char initial = 'A';
char *surname = "Matthew";
double age = 6.5;

printf("Hello Miss %c %s, aged %g\n", initial, surname, age);
```

This produces:

HelloMissAMathew,aged6.5

Fieldspecifiers are given as numbers immediately after the % character in a conversion specifier. They are used to make things clearer.

Format	Argument	Output
%10s	"Hello"	Hello
%-10s	"Hello"	Hello
%10d	1234	1234
%-10d	1234	1234
%010d	1234	0000001234
%10.4f	12.34	12.3400
.*s	10, "Hello"	Hello

The **printf** function returns an integer, the number of characters written.

scanf, fscanf and sscanf

```
#include <stdio.h>

int scanf(const char *format, ...);
int fscanf(FILE *stream, const char *format, ...);
int sscanf(const char *s, const char *format, ...);
```

The **scanf** family of functions work in a similar way to the **printf** group, except that they read items from a stream and place values into variables.

The format string for **scanf** and friends contains both ordinary characters and conversion specifiers.

Here is a simple example:

```
int num;
scanf("Hello %d", &num);
```

The call to **scanf** will succeed and place **1234** into the variable **num** given either of the following inputs.

```
Hello      1234
Hello1234
```

Other conversion specifiers are:

- **%d** Scan a decimal integer.
- **%o, %x** Scan an octal, hexadecimal integer.
- **%f, %e, %g** Scan a floating point number.
- **%c** Scan a character (whitespace not skipped).
- **%s** Scan a string.
- **%[]** Scan a set of characters (see below).
- **%%** Scan a **%** character.

Given the input line,

```
Hello, 1234, 5.678, X, string to the end of the line
```

this call to **scanf** will correctly scan four items:

```
char s[256];
int n;
float f;
char c;

scanf("Hello,%d,%g, %c, %[^\\n]", &n,&f,&c,s);
```

In general, **scanf** and friends are not highly regarded, for three reasons:

- Traditionally, the implementations have been buggy.
- They're inflexible to use.
- They lead to code where it's very difficult to work out what is being parsed.

Other Stream Functions

Other library functions use either stream parameters or the standard streams **stdin**, **stdout**, **stderr**:

- **fgetpos** Get the current position in a file stream.
- **fsetpos** Set the current position in a file stream.
- **ftell** Return the current file offset in a stream.
- **rewind** Reset the file position in a stream.
- **freopen** Reuse a file stream.
- **setvbuf** Set the buffering scheme for a stream.
- **remove** Equivalent to **unlink**, unless the **path** parameter is a directory in which case it's equivalent to **rmdir**.

You can use the file stream functions to implement the file copy program, by using library functions.

Try It Out—Another File Copy Program

This program does the character-by-character copy, is accomplished using calls to the functions referenced in **stdio.h**.

```
#include <stdio.h>

int main()
{
    int c;
    FILE *in, *out;

    in = fopen("file.in", "r");
    out = fopen("file.out", "w");

    while((c = fgetc(in)) != EOF)
        fputc(c, out);

    exit(0);
}
```

Running this program as before, we get:

```
$ time copy_stdio
```

```
1.69user0.78system0:03.70elapsed66%CPU
```

This time, the program runs in 3.7 seconds.

Stream Errors

To indicate an error, many of the **stdio** library functions return out-of-range values, such as null pointers or the constant **EOF**.

In these cases, the error is indicated in the external variable **errno**:

```
#include <errno.h>

extern int errno;
```

*Note that many functions may change the value of **errno**. Its value is only valid when a function has failed. You should inspect it immediately after a function has indicated failure. You should always copy it into another variable before using it, because printing functions, such as **fprintf**, might alter **errno** themselves.*

The **ferror** function tests the error indicator for a stream and returns non-zero if it is set, zero otherwise.

```
#include <stdio.h>

int ferror(FILE *stream);
int feof(FILE *stream);
void clearerr(FILE *stream);
```

The **feof** function tests the end-of-file indicator within a stream and returns non-zero if it is set, zero otherwise.

You use it like this:

```
if (feof(some_stream))
    /* We're at the end */
```

The **clearerr** function clears the end-of-file and error indicators for the stream to which **stream** points.

Streams and File Descriptors

Each file stream is associated with a low-level file descriptor.

You can mix low-level input and output operations with higher-level stream operations, but this is generally unwise.

The effects of buffering can be difficult to predict.

```
#include <stdio.h>

int fileno(FILE *stream);
FILE *fdopen(int fildes, const char *mode);
```

File and Directory Maintenance

The standard libraries and system calls provide complete control over the creation and maintenance of files and directories.

chmod

You can change the permissions on a file or directory using the **chmod** system call. This forms the basis of the **chmod** shell program.

```
#include <sys/stat.h>

int chmod(const char *path, mode_t mode);
```

chown

As a superuser, you can change the owner of a file using the **chown** system call.

```
#include <unistd.h>

int chown(const char *path, uid_t owner, gid_t group);
```

unlink, link, symlink

We can remove a file using **unlink**.

```
#include <unistd.h>

int unlink(const char *path);
int link(const char *path1, const char *path2);
int symlink(const char *path1, const char *path2);
```

The **unlink** system call decrements the link count on a file. The

link system call creates a new link to an existing file.

The **symlink** creates a symbolic link to an existing file.

mkdir, rmdir

We can create and remove directories using the **mkdir** and **rmdir** system calls.

```
#include <sys/stat.h>

int mkdir(const char *path, mode_t mode);
```

The **mkdir** system call makes a new directory with **path** as its name. The

rmdir system call removes an empty directory.

```
#include <unistd.h>

int rmdir(const char *path);
```

chdir, getcwd

A program can navigate directories using the **chdir** system call.

```
#include <unistd.h>

int chdir(const char *path);
```

A program can determine its current working directory by calling the **getcwd** library function.

```
#include <unistd.h>

char *getcwd(char *buf, size_t size);
```

The **getcwd** function writes the name of the current directory into the given buffer, **buf**.

Scanning Directories

The directory functions are declared in a header file, **dirent.h**. They use a structure, **DIR**, as a basis for directory manipulation.

Here are these functions:

- **opendir, closedir**
- **readdir**
- **telldir**
- **seekdir**

opendir

The **opendir** function opens a directory and establishes a directory stream.

```
#include <sys/types.h>
#include <dirent.h>

DIR *opendir(const char *name);
```

readdir

```
#include <sys/types.h>
#include <dirent.h>

struct dirent *readdir(DIR *dirp);
```

The **readdir** function returns a pointer to a structure detailing the next directory entry in the directory stream **dirp**.

The **dirent** structure containing directory entry details included the following entries:

➤ ino_t	d_ino	The inode of the file.
➤ char	d_name[]	The name of the file.

telldir

The **telldir** function returns a value that records the current position in a directory stream.

```
#include <sys/types.h>
#include <dirent.h>

long int telldir(DIR *dirp);
```

Seekdir

The **seekdir** function sets the directory entry pointer in the directory stream given by **dirp**.

```
#include <sys/types.h>
#include <dirent.h>

void seekdir(DIR *dirp, long int loc);
```

closedir

```
#include <sys/types.h>
#include <dirent.h>

int closedir(DIR *dirp);
```

The **closedir** function closes a directory stream and frees up the resources associated with it.

Try It Out- A Directory Scanning Program

1. The **printdir**, prints out the current directory. It will recurse for subdirectories.

```
#include <unistd.h>
#include <stdio.h>
#include <dirent.h>
#include <string.h>
#include <sys/stat.h>

void printdir(char *dir, int depth)
{
    DIR *dp;
    struct dirent *entry;
    struct stat statbuf;

    if((dp = opendir(dir)) == NULL) {
        fprintf(stderr, "cannot open directory: %s\n", dir);
        return;
    }
    chdir(dir);
    while((entry = readdir(dp)) != NULL) {
        stat(entry->d_name, &statbuf);
```

```

        if(S_ISDIR(statbuf.st_mode)) {
            /* Found a directory, but ignore . and .. */
            if(strcmp(".",entry->d_name) == 0 ||
               strcmp("..",entry->d_name) == 0)
                continue;
            printf("%*s%s/\n",depth,"",entry->d_name);
            /* Recurse at a new indent level */
            printdir(entry->d_name,depth+4);
        }
        else printf("%*s%s\n",depth,"",entry->d_name);
    }
    chdir("..");
    closedir(dp);
}

```

2. Now we move onto the **main** function:

```

$ printdir
Directory scan of /home/neil:
.less
.lessrc
.term/
    termrc
.elm/
    elmrc
Mail/
    received
    mbox
.bash_history
.fvwmrc
.tin/
    .mailidx/
    .index/
        563.1
        563.2
posted
attributes
active
tinrc
done.

```

```

int main()
{
    printf("Directory scan of /home/neil:\n");
    printdir("/home/neil", 0);
    printf("done.\n");

    exit(0);
}

```

The program produces output like this (edited for brevity):

How It Works

After some initial error checking, using **opendir**, to see that the directory exists, **printdir** makes a call to **chdir** to the directory specified. While the entries returned by **readdir** aren't null, the program checks to see whether the entry is a directory. If it isn't, it prints the file entry with indentation **depth**.

Here is one way to make the program more general.

```

int main(int argc, char* argv[])
{
    char *topdir, pwd[2] = ".";
    if (argc != 2)
        topdir = pwd;
    else
        topdir = argv[1];

    printf("Directory scan of %s\n", topdir);
    printdir(topdir, 0);
    printf("done.\n");

    exit(0);
}

```

You can run it using the command:

```
$printdir/usr/local|more
```

Errors

System calls and functions can fail. When they do, they indicate the reason for their failure by setting the value of the external variable **errno**.

The values and meanings of the errors are listed in the header file **errno.h**. They include:

➤ EPERM	Operation not permitted
➤ ENOENT	No such file or directory
➤ EINTR	Interrupted system call
➤ EIO	I/O Error
➤ EBUSY	Device or resource busy
➤ EEXIST	File exists
➤ EINVAL	Invalid argument
➤ EMFILE	Too many open files
➤ ENODEV	No such device
➤ EISDIR	Is a directory
➤ ENOTDIR	Isn't a directory

There are a couple of useful functions for reporting errors when they occur: **strerror** and **perror**.

```
#include <string.h>

char *strerror(int errnum);
```

The **strerror** function maps an error number into a string describing the type of error that has occurred.

```
#include <stdio.h>

void perror(const char *s);
```

The **perror** function also maps the current error, as reported in **errno**, into a string and prints it on the standard error stream.

It's preceded by the message given in the strings (if not **null**), followed by a colon and a space. For example:

```
perror("program");
```

might give the following on the standard error output:

```
program: Too many open files
```

Advanced Topics

fcntl

The **fcntl** system call provides further ways to manipulate low-level file descriptors.

```
#include <fcntl.h>

int fcntl(int fildes, int cmd);
int fcntl(int fildes, int cmd, long arg);
```

It can perform miscellaneous operations on open file descriptors. The call,

```
fcntl(fildes, F_DUPFD, newfd);
```

returns a new file descriptor with a numerical value equal to or greater than the integer **newfd**.

The call, **fcntl**, returns the file descriptor flags as defined in **fcntl.h**. The call,

```
fcntl(fildes, F_GETFD)
fcntl(fildes, F_SETFD, flags)
```

is used to set the file descriptor flags, usually just **FD_CLOEXEC**. The calls,

```
fcntl(fildes, F_GETFL)
fcntl(fildes, F_SETFL, flags)
```

respectively get and set the file status flags and access modes.

mmap

The **mmap** function creates a pointer to a region of memory associated with the contents of the file accessed through an open file descriptor.

```
#include <sys/mman.h>

void *mmap(void *addr, size_t len, int prot, int flags, int fildes,
```

You can use the **addr** parameter to request a particular memory address.

The **prot** parameter is used to set access permissions for the memory segment. This is a bitwise OR of the following constant values.

- **PROT_READ** The segment can be read.
- **PROT_WRITE** The segment can be written.
- **PROT_EXEC** The segment can be executed.
- **PROT_NONE** The segment can't be accessed.

The **flags** parameter controls how changes made to the segment by the program are reflected elsewhere.

- **MAP_PRIVATE** The segment is private, changes are local.
- **MAP_SHARED** The segment changes are made in the file.
- **MAP_FIXED** The segment must be at the given address, **addr**.

The **msync** function causes the changes in part or all of the memory segment to be written back to (or read from) the mapped file.

```
#include <sys/mman.h>

int msync(void *addr, size_t len, int flags);
```

The part of the segment to be updated is given by the passed start address, **addr**, and length, **len**. The **flags** parameter controls how the update should be performed.

- **MS_ASYNC** Perform asynchronous writes.
- **MS_SYNC** Perform synchronous writes.
- **MS_INVALIDATE** Read data back in from the file.

The **munmap** function releases the memory segment.

```
#include <sys/mman.h>

int munmap(void *addr, size_t len);
```

Try It Out-Using mmap

1. The following program, **mmap_eg.c** shows a file of structures being updated using **mmap** and array-style accesses. Here is the definition of the **RECORD** structure and the create **NRECORDS** version, each recording their number.

```

#include <unistd.h>
#include <stdio.h>
#include <sys/mman.h>
#include <fcntl.h>

typedef struct {
    int integer;
    char string[24];
} RECORD;

#define NRECORDS (100)

int main()
{
    RECORD record, *mapped;
    int i, f;
    FILE *fp;

    fp = fopen("records.dat", "w+");
    for(i=0; i<NRECORDS; i++) {
        record.integer = i;
        sprintf(record.string, "RECORD-%d", i);
        fwrite(&record, sizeof(record), 1, fp);
    }
    fclose(fp);
}

```

2. We now change the integer value of record 43 to 143, and write this to the 43rd record's string:

```

fp = fopen("records.dat", "r+");
fseek(fp, 43*sizeof(record), SEEK_SET);
fread(&record, sizeof(record), 1, fp);

record.integer = 143;
sprintf(record.string, "RECORD-%d", record.integer);

fseek(fp, 43*sizeof(record), SEEK_SET);
fwrite(&record, sizeof(record), 1, fp);
fclose(fp);

```

3. We now map the records into memory and access the 43rd record in order to change the integer to 243 (and update the record string), again using memory mapping:

```
f = open("records.dat", O_RDWR);
read(f, &record, sizeof(record));
mapped = (RECORD *)mmap(0, NRECORDS*sizeof(record),
                        PROT_READ|PROT_WRITE, MAP_SHARED, f, 0);

mapped[43].integer = 243;
sprintf(mapped[43].string, "RECORD-%d", mapped[43].integer);

msync((void *)mapped, NRECORDS*sizeof(record), MS_ASYNC);
munmap((void *)mapped, NRECORDS*sizeof(record));
close(f);

exit(0);
}
```

Unit III-Processes and Signals

Processes and Signals

Processes and signals form a fundamental part of the UNIX operating environment, controlling almost all activities performed by a UNIX computer system.

Here are some of the things you need to understand.

- Process structure, type and scheduling
- Starting new processes in different ways
- Parent, child and zombie processes
- What signals are and how to use them


What is a Process?

The X/Open Specification defines a process as an address space and single thread of control that executes within that address space and its required system resources.

A process is, essentially, a running program.

Process Structure

Here is how a couple of processes might be arranged within the operating system.

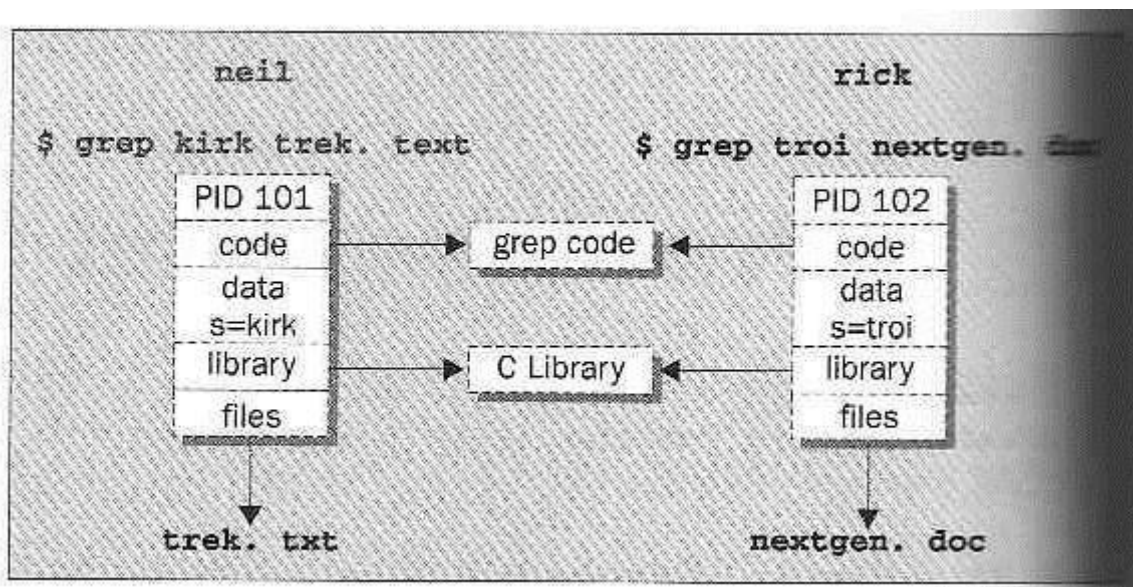

Each process is allocated a unique number, a **process identifier**, or PID.

The program code that will be executed by the **grep** command is stored in a disk file. The system libraries can also be shared.

A process has its own stack space.

The Process Table

The UNIX **processtable** may be thought of as a data structure describing all of the processes that are currently loaded.

Viewing Processes

We can see what processes are running by using the **ps** command. Here is some sample output:

```
$ ps
  PID TTY STAT  TIME COMMAND
    87 v01 S      0:00 -bash
   107 v01 S      0:00 sh /usr/X11/bin/startx
   115 v01 S      0:01 fvwm
   119 pp0 S      0:01 -bash
   129 pp0 S      0:06 emacs process.txt
   146 v01 S      0:00 oclock
```

The **PID** column gives the PIDs, the **TTY** column shows which terminal started the process, the **STAT** column shows the current status, **TIME** gives the CPU time used so far and the **COMMAND** column shows the command used to start the process.

Let's take a closer look at some of these:

```
87 v01 S      0:00 -bash
```

The initial login was performed on virtual console number one (**v01**). The shell is running **bash**. Its status is **S**, which means sleeping. This is because it's waiting for the X Windows system to finish.

```
107 v01 S      0:00 sh /usr/X11/bin/startx
```

X Windows was started by the command **startx**. It won't finish until we exit from X. It too is sleeping.

```
115 v01 S      0:01 fvwm
```

The **fvwm** is a window manager for X, allowing other programs to be started and windows to be arranged on the screen.

```
119 pp0 S      0:01 -bash
```

This process represents a window in the X Windows system. The shell, **bash**, is running in the new window. The window is running on a new pseudo terminal (**/dev/ptyp0**) abbreviated **pp0**.

```
129 pp0 S      0:06 emacs process.txt
```

This is the **EMACS** editor session started from the shell mentioned above. It uses the pseudo terminal.

```
146 v01 S      0:00 oclock
```

This is a clock program started by the window manager. It's in the middle of a one-minute wait between updates of the clock hands.

System Processes

Let's look at some other processes running on this Linux system. The output has been abbreviated for clarity:

```
$ ps -ax
  PID TTY  STAT  TIME COMMAND
    1  ?    S      0:00 init
    7  ?    S      0:00 update (bdf flush)
   40  ?    S      0:01 /usr/sbin/syslogd
   46  ?    S      0:00 /usr/sbin/lpd
   51  ?    S      0:00 sendmail: accepting connections
   88 v02  S      0:00 /sbin/agetty 38400 tty2
  109  ?    R      0:41 X :0
  192 pp0  R      0:00 ps -ax
```

Here we can see one very important process indeed:

```
1 ? S 0:00 init
```

In general, each process is started by another, known as its **parent process**. A process so started is known as a **child process**.

When UNIX starts, it runs a single program, the prime ancestor and process number one: **init**. One such example is the login procedure **init** starts the **getty** program once for each terminal that we can use to log in.

These are shown in the **ps** output like this:

```
88 v02 S 0:00 /sbin/agetty 38400 tty2
```

Process Scheduling

One further **ps** output example is the entry for the **ps** command itself:

```
192 pp0 R 0:00 ps -ax
```

This indicates that process 192 is in a run state (**R**) and is executing the command **ps -ax**.

We can set the process priority using **nice** and adjust it using **renice**, which reduces the priority of a process by 10. High priority jobs have negative values.

Using the **ps-l** (for long output), we can view the priority of processes. The value we are interested in is shown in the **NI** (nice) column:

```
$ ps -l
 F      UID      PID  PPID  PRI  NI  SIZE  RSS  WCHAN      STAT  TTY      TIME  COMM
  0      501     146      1      1      0    85   756  130b85      S    v01      0:00  oclock
```

Here we can see that the **oclock** program is running with a default nice value. If it had been started with the command,

```
$ nice oclock &
```

it would have been allocated a nice value of +10.

We can change the priority of a running process by using the **renice** command,

```
$ renice 10 146
146: old priority 0, new priority 10
```

So that now the clock program will be scheduled to run less often. We can see the modified nice value with the **ps** again:

F	UID	PID	PPID	PRI	NI	SIZE	RSS	WCHAN	STAT	TTY	TIME	COMM
0	501	146	1	20	10	85	756	130b85	S	N	v01	0:00 oclo

Notice that the status column now also contains **N**, to indicate that the nice value has changed from the default.

Starting New Processes

We can cause a program to run from inside another program and thereby create a new process by using the **system** library function.

```
#include <stdlib.h>

int system (const char *string);
```

The **system** function runs the command passed to it as **string** and waits for it to complete. The command is executed as if the command,

```
$ sh -c string
```

has been given to a shell.

Try It Out-system

1. We can use **system** to write a program to run **ps** for us.

```
#include <stdlib.h>
#include <stdio.h>

int main()
{
    printf("Running ps with system\n");
```

```
    system("ps -ax");
    printf("Done.\n");
    exit(0);
}
```

2. When we compile and run this program, **system.c**, we get the following:

```

$ ./system
Running ps with system
  PID TTY STAT  TIME COMMAND
    1  ?  S      0:00 init
    7  ?  S      0:00 update (bdflush)
...
  146 v01 S N    0:00 oclock
  256 pp0 S      0:00 ./system
  257 pp0 R      0:00 ps -ax
Done.

```

3. The **system** function uses a shell to start the desired program. We could put the task in the background, by changing the function call to the following:

```
system("ps -ax &");
```

Now, when we compile and run this version of the program, we get:

```

$ ./system2
Running ps with system
Done.
$
  PID TTY STAT  TIME COMMAND
    1  ?  S      0:00 init
    7  ?  S      0:00 update (bdflush)
...
  146 v01 S N    0:00 oclock
  266 pp0 R      0:00 ps -ax

```

How It Works

In the first example, the program calls **system** with the string "**ps-ax**", which executes the **ps** program. Our program returns from the call to **system** when the **ps** command is finished. In the second example, the call to **system** returns as soon as the shell command finishes. The shell returns as soon as the **ps** program is started, just as would happen if we had typed,

```
$ ps -ax &
```

at a shell prompt.

Replacing a Process Image

There is a whole family of related functions grouped under the **exe** heading. They differ in the way that they start processes and present program arguments.

```

#include <unistd.h>

char **environ;

int execl(const char *path, const char *arg0, ..., (char *)0);
int execlp(const char *path, const char *arg0, ..., (char *)0);
int execl_e(const char *path, const char *arg0, ..., (char *)0, const
*envp[]);
int execv(const char *path, const char *argv[]);
int execvp(const char *path, const char *argv[]);
int execve(const char *path, const char *argv[], const char *envp[])

```

The **exec** family of functions replace the current process with another created according to the arguments given.

If we wish to use an **exec** function to start the **ps** program as in our previous examples, we have the following choices:

```

#include <unistd.h>

/* Example of an argument list */
/* Note that we need a program name for argv[0] */
const char *ps_argv[] =
    {"ps", "-ax", 0};

/* Example environment, not terribly useful */
const char *ps_envp[] =
    {"PATH=/bin:/usr/bin", "TERM=console", 0};

/* Possible calls to exec functions */
execl("/bin/ps", "ps", "-ax", 0);           /* assumes ps is in /bi

```

```

execlp("ps", "ps", "-ax", 0);               /* assumes /bin is in PA
execl_e("/bin/ps", "ps", "-ax", 0, ps_envp); /* passes own environmen

execv("/bin/ps", ps_argv);
execvp("ps", ps_argv);
execve("/bin/ps", ps_argv, ps_envp);

```

Try It Out-exclp

Let's modify our example to use an **execlp** call.

```

#include <unistd.h>
#include <stdio.h>

int main()
{
    printf("Running ps with execlp\n");
    execlp("ps", "ps", "-ax", 0);
    printf("Done.\n");
    exit(0);
}

```

Now, when we run this program, **pexec.c**, we get the usual **ps** output, but no **Done.** message at all.

Note also that there is no reference to a process called **pexec** in the output:

```

$ ./pexec
Running ps with execlp
  PID TTY STAT  TIME COMMAND
    1  ?  S      0:00 init
    7  ?  S      0:00 update (bdflush)
...
 146 v01 S N    0:00 oclock
 294 pp0 R     0:00 ps -ax

```

How It Works

The program prints its first message and then calls **execlp**, which searches the directories given by the **PATH** environment variable for a program called **ps**.

It then executes this program in place of our **pexec** program, starting it as if we had given the shell command:

```

$ ps -ax

```

Duplicating a Process Image

To use processes to perform more than one function at a time, we need to create an entirely separate process from within a program.

We can create a new process by calling **fork**. This system call duplicates the current process.

Combined with **exec**, **fork** is all we need to create new processes to do our bidding.

```
#include <sys/types.h>
#include <unistd.h>

pid_t fork(void);
```

The **fork** system call creates a new child process, identical to the calling process except that the new process has a unique process ID and has the calling process as its parent PID.

A typical code fragment using **fork** is:

```
pid_t new_pid;

new_pid = fork();

switch(new_pid) {
case -1 : /* Error */
    break;
case 0  : /* We are child */
    break;
default : /* We are parent */
    break;
}
```

Try It Out-fork

Let's look at a simple example, **fork.c**:

```

#include <sys/types.h>
#include <unistd.h>
#include <stdio.h>

int main()
{
    pid_t pid;
    char *message;
    int n;

    printf("fork program starting\n");
    pid = fork();
    switch(pid)
    {
        case -1:
            exit(1);
        case 0:
            message = "This is the child";
            n = 5;
            break;
        default:
            message = "This is the parent";
            n = 3;
            break;
    }

    for(; n > 0; n--) {
        puts(message);
        sleep(1);
    }
    exit(0);
}

```

This program runs as two processes. A child prints a message five times. The parent prints a message only three times.

```

$ ./fork
fork program starting
This is the parent
This is the child
This is the parent
This is the child
This is the parent
This is the child
$ This is the child
This is the child

```

How It Works

When the call to **fork** is made, this program divides into two separate processes.

Waiting for a Process

We can arrange for the parent process to wait until the child finishes before continuing by calling **wait**.

```
#include <sys/types.h>
#include <sys/wait.h>

pid_t wait(int *stat_loc);
```

The **wait** system call causes a parent process to pause until one of its child processes dies or is stopped.

Macro	Definition
WIFEXITED (stat_val)	Non-zero if the child is terminated normally.
WEXITSTATUS (stat_val)	If WIFEXITED is non-zero, this returns child exit code.
WIFSIGNALED (stat_val)	Non-zero if the child is terminated on an uncaught signal.
WTERMSIG (stat_val)	If WIFSIGNALED is non-zero, this returns a signal number.
WIFSTOPPED (stat_val)	Non-zero if the child has stopped on a signal.
WSTOPSIG (stat_val)	If WIFSTOPPED is non-zero, this returns a signal number.

Try It Out - wait

1. Let's modify our program slightly so we can wait for and examine the child process exit status. Call the new program **wait.c**.

```
#include <sys/types.h>
#include <sys/wait.h>
#include <unistd.h>
#include <stdio.h>
```

2. This section of the program waits for the child process to finish:

```
int main()
{
    pid_t pid;
    char *message;
    int n;
    int exit_code;

    printf("fork program starting\n");
    pid = fork();
    switch(pid)
    {
        case -1:
            exit(1);
        case 0:
            message = "This is the child";
            n = 5;
            exit_code = 37;
            break;
        default:
            message = "This is the parent";
            n = 3;
            exit_code = 0;
            break;
    }

    for(; n > 0; n--) {
        puts(message);
        sleep(1);
    }
}
```

```

    if(pid) {
        int stat_val;
        pid_t child_pid;

        child_pid = wait(&stat_val);

        printf("Child has finished: PID = %d\n", child_pid);
        if(WIFEXITED(stat_val))
            printf("Child exited with code %d\n", WEXITSTATUS(stat_val));
        else
            printf("Child terminated abnormally\n");
    }
    exit (exit_code);
}

```

When we run this program, we see the parent wait for the child. The output isn't confused and the exit code is reported as expected.

```

$ ./wait
fork program starting
This is the parent
This is the child
This is the parent

This is the child
This is the parent
This is the child
This is the child
This is the child
Child has finished: PID = 410
Child exited with code 37
$

```

How It Works

The parent process uses the **wait** system call to suspend its own execution until status information becomes available for a child process.

Zombie Processes

When a child process terminates, an association with its parents survives until the parent in turn either terminates normally or calls **wait**.

This terminated child process is known as a **zombie process**.

Try It Out-Zombies

fork2.c is just the same as **fork.c**, except that the number of messages

printed by the child and parent processes is reversed. Here are the relevant lines of code:

```
switch(pid)
{
case -1:
    exit(1);
case 0:
    message = "This is the child";
    n = 3;
    break;
default:
    message = "This is the parent";
    n = 5;
    break;
}
```

How It Works

If we run the above program with **fork2** and then call the **ps** program after the child has finished but before the parent has finished, we'll see a line like this:

```
PID TTY STAT TIME COMMAND
420 pp0 Z    0:00 (fork2) <zombie>
```

There's another system call that you can use to wait for child processes. It's called **waitpid** and you can use it to wait for a specific process to terminate.

```
#include <sys/types.h>
#include <sys/wait.h>

pid_t waitpid(pid_t pid, int *stat_loc, int options);
```

If we want to have a parent process regularly check whether a specific child process had terminated, we could use the call,

```
waitpid(child_pid, (int *) 0, WNOHANG);
```

which will return zero if the child has not terminated or stopped or **child_pid** if it has.

Input and Output Redirection

We can use our knowledge of processes to alter the behavior of programs by exploiting the fact that open file descriptors are

preserved across calls to
fork and **exec**.

Try It Out-Redirection

1. Here's a very simple filter program, **upper.c**, to convert all characters to uppercase:

```
#include <stdio.h>
#include <ctype.h>

int main()
{
    int ch;
    while((ch = getchar()) != EOF) {
        putchar(toupper(ch));
    }
    exit(0);
}
```

When we run this program, it reads our input and converts it:

```
$ ./upper
hello THERE
HELLO THERE
^D
$
```

We can, of course, use it to convert a file to uppercase by using the shell redirection:

```
$ cat file.txt
this is the file, file.txt, it is all lowercase.
$ upper < file.txt
THIS IS THE FILE, FILE.TXT, IT IS ALL LOWERCASE.
```

2. What if we want to use this filter from within another program? This code, **useupper.c**, accepts a filename as an argument and will respond with an error if called incorrectly:

```
#include <unistd.h>
#include <stdio.h>

int main(int argc, char *argv[])
{
    char *filename;

    if(argc != 2) {
        fprintf(stderr, "usage: useupper file\n");
        exit(1);
    }

    filename = argv[1];
}
```

3. The done, were open the standard input, again checking for any errors as we do so, and then use **execl** to call **upper**:

```
if(!freopen(filename, "r", stdin)) {  
    fprintf(stderr, "could not redirect stdin to file %s\n", fil
```

```
        exit(2);  
    }  
  
    execl("./upper", "upper", 0);
```

4. don't forget that **execl** replaces the current process; provided there is no error, the remaining lines are not executed:

```
    fprintf(stderr, "could not exec upper!\n");  
    exit(3);  
}
```

How It Works

when we run this program, we can give it a file to convert to uppercase. The job is done by the program **upper**. The program is executed by:

```
$ ./useupper file.txt  
THIS IS THE FILE, FILE.TXT, IT IS ALL LOWER CASE.
```

Because open file descriptors are preserved across the call to **execl**, the **upper** program runs exactly as it would have under the shell command:

```
$ upper < file.txt
```

Threads

UNIX processes can cooperate; they can send each other messages and they can interrupt one another.

There is a class of process known as a **thread** which are distinct from processes in that they are separate execution streams within a single process.

Signals

A **signal** is an event generated by the UNIX system in response to some condition, upon receipt of which a process may in turn take some action.

Signal names are defined in the header file **signal.h**. They all begin with **SIG** and include:

Signal Name	Description
SIGABORT	*Process abort
SIGALRM	Alarm clock
SIGFPE	*Floating point exception
SIGHUP	Hangup
SIGILL	*Illegal instruction
SIGINT	Terminal Interrupt
SIGKILL	Kill (can't be caught or ignored)
SIGPIPE	Write on a pipe with no reader
SIGQUIT	Terminal Quit
SIGSEGV	*Invalid memory segment access
SIGTERM	Termination
SIGUSR1	User-defined signal 1
SIGUSR2	User-defined signal 2

Additional signals include:

Signal Name	Description
SIGCHLD	Child process has stopped or exited
SIGCONT	Continue executing, if stopped
SIGSTOP	Stop executing (can't be caught or ignored)
SIGTSTP	Terminal stop signal
SIGTTIN	Background process trying to read
SIGTTOU	Background process trying to write

If the shell and terminal driver are configured normally, typing the interrupt character (Ctrl-C) at the keyboard will result in the **SIGINT** signal being sent to the foreground process. This will cause the program to terminate.

We can handle signals using the **signal** library function.

```
#include <signal.h>

void (*signal(int sig, void (*func)(int)))(int);
```

The **signal** function itself returns a function of the same type, which is the previous value of the function set up to handle this signal, or one of these two special values:

- **SIG_IGN** Ignore the signal.
- **SIG_DFL** Restore default behavior.

Try It Out-Signal Handling

1. We'll start by writing the function which reacts to the signal which is passed in the parameter **sig**. Let's call it **ouch**:

```
#include <signal.h>
#include <stdio.h>
#include <unistd.h>

void ouch(int sig)
{
    printf("OUCH! - I got signal %d\n", sig);
}
```

2. The **main** function has to intercept the **SIGINT** signal generated when we type Ctrl-C. For the rest of the time, it just sits in an infinite loop, printing a message once a second:

```
int main()
{
    (void) signal(SIGINT, ouch);

    while(1) {
        printf("Hello World!\n");
        sleep(1);
    }
}
```

3. While the program is running, typing Ctrl-C causes it to react and then continue. When we **type** Ctrl-C again, the program ends:

```

$ ./ctrlc
Hello World!
Hello World!
Hello World!
Hello World!
^C
OUCH! - I got signal 2
Hello World!
Hello World!
Hello World!
Hello World!
^C
$

```

How It Works

The program arranges for the function **ouch** to be called when we type Ctrl-C, which gives the **SIGINT** signal.

Sending Signals

A process may send a signal to itself by calling **raise**.

```

#include <signal.h>

int raise(int sig);

```

A process may send a signal to another process, including itself, by calling **kill**.

```

#include <sys/types.h>
#include <signal.h>

int kill(pid_t pid, int sig);

```

Signals provide us with a useful alarm clock facility.

The **alarm** function call can be used by a process to schedule a **SIGALRM** signal at some time in the future.

```

#include <unistd.h>

unsigned int alarm(unsigned int seconds);

```

Try It Out-An Alarm Clock

1. In **alarm.c**, the first function, **ding**, simulates an alarm clock:

```

#include <signal.h>
#include <stdio.h>
#include <unistd.h>

void ding(int sig)
{
    printf("alarm has gone off\n");
}

```

2. In **main**, we tell the child process to wait for five seconds before sending a **SIGALRM** signal to its parent:

```

int main()
{
    int pid;

    printf("alarm application starting\n");

    if((pid = fork()) == 0) {
        sleep(5);
        kill(getppid(), SIGALRM);
        exit(0);
    }
}

```

The parent process arranges to catch **SIGALRM** with a call to **signal** and then waits for the inevitable.

```

    printf("waiting for alarm to go off\n");
    (void) signal(SIGALRM, ding);

    pause();

    printf("done\n");
    exit(0);
}

```

When we run this program, it pauses for five seconds while it waits for the simulated alarm clock.

```

$ ./alarm
alarm application starting
waiting for alarm to go off
<5 second pause>
alarm has gone off
done
$

```

This program introduces a new function, **pause**, which simply causes the program to

suspend execution until a signal occurs. It's declared as,

```
#include <unistd.h>

int pause(void);
```

How It Works

The alarm clock simulation program starts a new process via **fork**. This child process sleeps for five seconds and then sends a **SIGALRM** to its parent. A Robust Signals Interface X/Open specification recommends a newer programming interface for signals that is more robust: **sigaction**.

```
#include <signal.h>

int sigaction(int sig, const struct sigaction *act, struct sigaction *oldact);
```

The **sigaction** structure, used to define the actions to be taken on receipt of the signal specified by **sig**, is defined in **signal.h** and has at least the following members:

void (*) (int) sa_handler	function, SIG_DFL or SIG_IGN
sigset_t sa_mask	signals to block in sa_handler
int sa_flags	signal action modifiers

Try It Out-sigaction

Make the changes shown below so that **SIGINT** is intercepted by **sigaction**. Call the new program **ctrlc2.c**.

```
#include <signal.h>
#include <stdio.h>
#include <unistd.h>

void ouch(int sig)
{
    printf("OUCH! - I got signal %d\n", sig);
}

int main()
{
    struct sigaction act;

    act.sa_handler = ouch;
    sigemptyset(&act.sa_mask);
    act.sa_flags = 0;

    sigaction(SIGINT, &act, 0);

    while(1) {
        printf("Hello World!\n");
        sleep(1);
    }
}
```

Running the program, we get a message when we type Ctrl-C because **SIGINT** is handled repeatedly by **sigaction**. Type Ctrl-\ to terminate the program.

```
$ ./ctrlc2
Hello World!
Hello World!
```

```
Hello World!
^C
OUCH! - I got signal 2
Hello World!
Hello World!
^C
OUCH! - I got signal 2
Hello World!
Hello World!
^\\
Quit
$
```

How It Works

The program calls **sigaction** instead of **signal** to set the signal handler for Ctrl-C (**SIGINT**) to the function **ouch**.

Signal Sets

The header file **signal.h** defines the types **sigset_t** and functions used to manipulate sets of signals.

```
#include <signal.h>

int sigaddset(sigset_t *set, int signo);
int sigemptyset(sigset_t *set);
int sigfillset(sigset_t *set);
int sigdelset(sigset_t *set, int signo);
```

The function **sigismember** determines whether the given signal is a member of a signal set.

```
#include <signal.h>

int sigismember(sigset_t *set, int signo);
```

The process signal mask is set or examined by calling the function **sigprocmask**.

```
#include <signal.h>

int sigprocmask(int how, const sigset_t *set, sigset_t *oset);
```

sigprocmask can change the process signal mask in a number of ways

according to the **how** argument.
The **how** argument can be one of:

- **SIG_BLOCK** The signals in **set** are added to the signal mask.
- **SIG_SETMASK** The signal mask is set from **set**.
- **SIG_UNBLOCK** The signals in **set** are removed from the signal mask.

If a signal is blocked by a process, it won't be delivered, but will remain pending.
A program can determine which of its blocked signals are pending by calling the function **sigpending**.

```
#include <sigpending>

int sigpending(sigset_t *set);
```

A process can suspend execution until the delivery of one of a set of signals by calling **sigsuspend**.

This is a more general form of the **pause** function we met earlier.

```
#include <signal.h>

int sigsuspend(const sigset_t *sigmask);
```

sigaction Flags

The **sa_flags** field of the **sigaction** structure used in **sigaction** may contain the following values to modify signal behavior

- **SA_NOCLDSTOP** Don't generate **SIGCHLD** when child processes stop.
- **SA_RESETHAND** Reset signal action to **SIG_DFL** on receipt.
- **SA_RESTART** Restart interruptible functions rather than error with **EINTR**.
- **SA_NODEFER** Don't add the signal to the signal mask when caught.

Functions that are safe to call inside a signal handler, those guaranteed by the X/Open specification either to be re-entrant or not to raise signals themselves include:

access	fstat	read	sysconf
alarm	getegid	rename	tcdrain
cfgetispeed	geteuid	rmdir	tcflow
cfgetospeed	getgid	setgid	tcflush
cfsetispeed	getgroups	setpgid	tcgetattr
cfsetospeed	getpgrp	setsid	tcgetpgrp
chdir	getpid	setuid	tcsendbreak
chmod	getppid	sigaction	tcsetattr
chown	getuid	sigaddset	tcsetpgrp
close	kill	sigdelset	time
creat	link	sigemptyset	times
dup2	lseek	sigfillset	umask
dup	mkdir	sigismember	uname
execle	mkfifo	signal	unlink
execve	open	sigpending	utime
_exit	pathconf	sigprocmask	wait
fcntl	pause	sigsuspend	waitpid
fork	pipe	sleep	write
stat			

CommonSignalReference

HerewelistthesignalsthatUNIXprogramstypicallyneedtogetinvolved with, including the default behaviors:

Signal Name	Description
SIGALRM	Generated by the timer set by the alarm function.
SIGHUP	Sent to the controlling process by a disconnecting terminal, or by the controlling process on termination to each foreground process.
SIGINT	Typically raised from the terminal by typing <i>Ctrl-C</i> or the configured interrupt character.
SIGKILL	Typically used from the shell to forcibly terminate an errant process; signal can't be caught or ignored.
SIGPIPE	Generated if a pipe with no associated reader is written to.
SIGTERM	Sent as a request for a process to finish. Used by UNIX when shutting down to request that system services stop. This is the default signal sent by the kill command.
SIGUSR	May be used by processes to communicate with each other, possibly to cause them to report status information.
SIGUSR2	

The default action of a signal is abnormal termination of the process.

Signal Name	Description
SIGFPE	Generated by a floating point arithmetic exception.
SIGILL	An illegal instruction has been executed by the processor. Usually caused by a corrupt program or invalid shared memory module.
SIGQUIT	Typically raised from the terminal by typing <i>Ctrl-\</i> or the configured <i>quit</i> command.
SIGSEGV	A segmentation violation, usually caused by reading or writing at an invalid location in memory either by exceeding array bounds or de-referencing a null pointer. Overwriting a local array variable and corrupting the stack can also cause SIGSEGV to be raised when a function returns to an illegal address.

By default, these signals also cause abnormal termination. Additionally, implementation-dependent actions, such as creation of a core file, may occur.

Signal Name	Description
SIGSTOP	Stop executing (can't be caught or ignored).
SIGTSTP	Terminal stop signal, often raised by typing <i>Ctrl-Z</i> .
SIGTTIN	Used by the shell to indicate that background jobs have stopped because they have no data to read from the terminal or produce output.
SIGTTOU	Used by the shell to indicate that background jobs have stopped because they have no data to write to the terminal or produce output.

A process is stopped by default on receipt of one of the above signals.

Signal Name	Description
SIGCONT	Continue executing, if stopped.

SIGCONT restarts a stopped process and is ignored if received by a process which is not stopped.

Signal Name	Description
SIGCHLD	Raised when a child process stops or exits.

The **SIGCHLD** signal is ignored by default.

Summary

We have seen how processes are a fundamental part of the LINUX operating system. We have also learned to start, terminate, and signal between processes.

UNIT-IV

Interprocesscommunication,MessageQueuesandSemaphores

InterprocessCommunication

Introductionto IPC

IPCbetweenprocessesonasinglecomputersystem

IPC between processes on different systems

Pipes- creation

IPCbetweenrelatedprocesses usingunnamed pipes

FIFOs-creation, IPCbetweenunrelatedprocessesusingFIFOs(named pipes)

DifferencesBetweenUnnamedAndNamedPipes

popen & pclose library functions.

MessageQueues-Kernelsupportfor messages

APIsformessagequeues

client/server example.

Semaphores-Kernelsupportfor semaphores

APIsforsemaphores

Filelockingwith Semaphores

Introduction to IPC

Interprocess Communication- *“Interprocess communication (IPC) is the transfer of data among different processes”.*

Interprocess communication (IPC) includes thread synchronization and data exchange between threads beyond the process boundaries. If threads belong to the same process, they execute in the same address space, i.e. they can access global (static) data or heap directly, without the help of the operating system. However, if threads belong to different processes, they cannot access each other's address spaces without the help of the operating system.

There are two fundamentally different approaches in IPC:

- processes are residing on the same computer
- processes are residing on different computers

The first case is easier to implement because processes can share memory either in the user space or in the system space. This is equally true for uniprocessors and multiprocessors.

In the second case the computers do not share physical memory, they are connected via I/O device (for example serial communication or Ethernet). Therefore the processes residing in different computers can not use memory as a means for communication.

IPC between processes on a single system

Most of this chapter is focused on IPC on a single computer system, including four general approaches:

- Shared memory
- Messages
- Pipes
- Sockets

The synchronization objects considered in the previous chapter normally work across the process boundaries (on a single computer system). There is one addition necessary however: the synchronization objects must be named. The handles are generally private to the process, while the object names, like file names, are global and known to all processes.

```
h = init_CS("xxx");  
h = init_semaphore(20, "xxx");  
h = init_event("xxx");  
h = init_condition("xxx");  
h = init_message_buffer(100, "xxx");  
IPC between processes on different systems
```

IPC between processes on different systems

IPC is Inter Process Communication, more of a technique to share data across different processes **within** one machine, in such a way that data passing binds the coupling of different processes.

- The first, is using memory mapping techniques, where a memory map is created, and others open the memory map for reading/writing...
- The second is, using sockets, to communicate with one another... this has a high overhead, as each process would have to open up the socket, communicate across... although effective
- The third, is to use a pipe or a named pipe, a very good example

PIPES:

A pipe is a **serial** communication device (i.e., the data is read in the order in which it was written), which allows a **unidirectional communication**. The data written to end is read back from the other end.

The pipe is mainly used to communicate between two threads in a single process or between parent and child process. Pipes can only connect the related process. In shell, the symbol can be used to create a pipe.

In pipes the **capacity of data is limited**. (i.e.) If the writing process is faster than the reading process which consumes the data, the pipe cannot store the data. In this situation the writer process will block until more capacity becomes available. Also if the reading process tries to read data when there is no data to read, it will be blocked until the data becomes available. By this, pipes **automatically synchronize the two processes**.

Creating pipes:

The `pipe()` function provides a means of passing data between two programs and also allows to read and write the data.

```
#include <unistd.h>
int pipe(int file_descriptor[2]);
```

`pipe()` function is passed with an array of file descriptors. It will fill the array with new file descriptors and returns zero. On error, returns -1 and sets the error to indicate the reason of failure.

The file descriptors are connected in a way that is data written to `file_descriptor[1]` can be read back from the `file_descriptor[0]`.

(**Note:** As this uses file descriptors and not the file streams, we must use `read` and `write` system calls to access the data.)

Pipes are originally used in UNIX and are made even more powerful in Windows 95/NT/2000.

Pipes are implemented in file system. Pipes are basically files with only two file offsets: one for reading and another for writing. Writing to a pipe and reading from a pipe is strictly in FIFO manner. (Therefore pipes are also called FIFOs).

For efficiency, pipes are in-core files, i.e. they reside in memory instead on disk, as any other global data structure. Therefore pipes must be restricted in size, i.e. number of pipe blocks must be limited. (In UNIX the limitation is that pipes use only direct blocks.) Since the pipes have a limited size and the FIFO access discipline, the reading and writing processes are synchronized in a similar manner as in case of message buffers. The access functions for pipes are the same as for files: WriteFile() and ReadFile().

Pipes used as standard input and output:

We can invoke the standard programs, one that don't expect a file descriptor as a parameter. #include<unistd.h>
int dup(int file_descriptor);
int dup2(int file_descriptor_1,
int file_descriptor_2);

The purpose of dup call is to open a new file descriptor, which will refer to the same file as an existing file descriptor. In case of dup, the value of the new file descriptor is the lowest number available. In dup2 it is same as, or the first available descriptor greater than the parameter file_descriptor_2.

We can pass data between process by first closing the file descriptor 0 and callismadetodup. By this the new file descriptor will have the number 0. As the new descriptor is the duplicate of an existing one, standard input is changed to have the access. So we have created two file descriptors for same file or pipe, one of them will be the standard input.

(Note: The same operation can be performed by using the fcntl() function. But compared to this dup and dup2 are more efficient)

```
//pipes.c
#include<unistd.h>
#include<stdlib.h>
#include<stdio.h>
#include<string.h>
int main()
{
    int data_processed;
    int file_pipes[2];
    const char some_data[]="123";
    pid_t fork_result;

    if(pipe(file_pipes)==0)
    {
        fork_result=fork();
        if(fork_result==(pid_t)-1)
        {
            fprintf(stderr,"fork failure");
            exit(EXIT_FAILURE);
        }
    }
```

```

    if(fork_result==(pid_t)0)
    {
        close(0);
        dup(file_pipes[0]);
        close(file_pipes[0]);
        close(file_pipes[1]);
        execlp("od","od","-c",(char*)0);
        exit(EXIT_FAILURE);
    }
    else
    {
        close(file_pipes[0]);
        data_processed=write(file_pipes[1],
        some_data,strlen(some_data));close(file_pipes[1]);
        printf("%d-wrote%dbytes\n",(int) getpid(),data_processed);
    }
    } exit(EXIT_SUCCESS);
}

```

The program creates a pipe and then forks. Now both parent and child process will have its own file descriptors for reading and writing. Therefore totally there are four file descriptors.

The child process will close its standard input with *close(0)* and calls *dup(file_pipes[0])*. This will duplicate the file descriptor associated with the read end. Then child closes its original file descriptor. As child will never write, it also closes the write file descriptor, *file_pipes[1]*. Now there is only one file descriptor 0 associated with the pipe that is standard input. Next, child uses the *exec* to invoke any program that reads standard input. The *od* command will wait for the data to be available from the user terminal.

Since the parent never read the pipe, it starts by closing the read end that is *file_pipe[0]*. When writing process of data has been finished, the write end of the parent is closed and exited. As there are no file descriptor open to write to pipe, the *od* command will be able to read the three bytes written to pipe, meanwhile the reading process will return 0 bytes indicating the end of the file.

There are two types of pipes:

- ☐ Named pipes.
- ☐ Unnamed pipes (Anonymous pipes)

4.6 Named pipes (FIFOs)

Similar to pipes, but allows for communication between unrelated processes. This is done by naming the communication channel and making it permanent.

Like pipe, FIFO is the unidirectional data stream.

FIFO creation:

int mkfifo (const char*pathname, mode_t mode);

- makes a FIFO special file with name pathname.
(mode specifies the FIFO's permissions, as common in UNIX-like file systems).
- A FIFO special file is similar to a pipe, except that it is created in a different way. Instead of being an anonymous communications channel, a FIFO special file is entered into the file system by calling mkfifo()

Once a FIFO special file has been created, any process can open it for reading or writing, in the same way as an ordinary file.

A First-in, first-out (FIFO) file is a pipe that has a name in the file system. It is also called a named pipe.

Creation of FIFO:

We can create a FIFO from the command line and within a program.

To create from **command line** we can use either `mknod` or `mkfifo` commands.

```
$mknod filename p
```

```
$mkfifo filename
```

(**Note:** The `mknod` command is available only in old versions, you can make use of `mkfifo` in new versions.)

To create FIFO **within the program** we can use two system calls. They are, `#include <sys/types.h>`
`#include <sys/stat.h>`

```
int mkfifo(const char  
*filename, mode_t mode);  
int mknod(const char *filename,  
mode_t mode | S_IFIFO, (dev_t) 0);
```

If we want to use the `mknod` function we have to use ORing process of file access mode with `S_IFIFO` and the `dev_t` value of 0. Instead of using this we can use the simple `mkfifo` function.

Accessing FIFO:

Let us first discuss how to access FIFO in command line using file commands. The useful feature of named pipes is, as they appear in the file system, we can use them in commands.

We can read from the FIFO (empty)

```
$cat /tmp/my_fifo
```

Now, let us write to the FIFO.

```
$echo "Simple!!!" > /tmp/my_fifo
```

(**Note:** These two commands should be executed in different terminals because the first command will be waiting for some data to appear in the FIFO.)

FIFO can also be accessed as like a file in the program using low-level I/O functions or C library I/O functions.

The only difference between opening a regular file and FIFO is the use of *open_flag* with the option *O_NONBLOCK*. The only restriction is that we can't open FIFO for reading and writing with *O_RDWR* mode.

//fifo1.c

```
#include <unistd.h>
#include <stdlib.h>
#include <stdio.h>
#include <string.h>
#include <fcntl.h>
#include <limits.h>
#include <sys/types.h>
#include <sys/stat.h>

#define FIFO_NAME "/tmp/my_fifo"
#define BUFFER_SIZE PIPE_BUF
#define TEN_MEG(1024*1024*10) int
main()
{
    int pipe_fd;
    int res;
    int open_mode=O_WRONLY;
    int bytes_sent = 0;
    char buffer[BUFFER_SIZE+1];
    if(access(FIFO_NAME,F_OK)==-1){ res
    = mkfifo(FIFO_NAME, 0777);
    if(res !=0) {
        fprintf(stderr,"Could not create fifo%s\n",FIFO_NAME); exit(EXIT_FAILURE);
    }
    }
    printf("Process %d opening FIFO O_WRONLY\n",getpid());
    pipe_fd = open(FIFO_NAME, open_mode);
    printf("Process %d result %d\n",getpid(),pipe_fd);if
    (pipe_fd != -1) {
        while(bytes_sent<TEN_MEG){
            res=write(pipe_fd,buffer,BUFFER_SIZE);if (res
            == -1) {
                fprintf(stderr,"Write error on pipe\n");
                exit(EXIT_FAILURE);
            }
        }
        (void)close(pipe_fd);
    }
    else{ exit(EXIT_FAILURE);
```

```
printf("Process%dfinished\n",getpid());
exit(EXIT_SUCCESS);
}
```

//fifo2.c


```
#include <unistd.h>
#include <stdlib.h>
#include <stdio.h>
#include <string.h>
#include <fcntl.h>
#include <limits.h>
#include <sys/types.h>
#include <sys/stat.h>
#define FIFO_NAME "/tmp/my_fifo"
#define BUFFER_SIZE PIPE_BUF
int
main()
{
    int pipe_fd; int
    res;
    int open_mode = O_RDONLY; char
    buffer[BUFFER_SIZE + 1]; int
    bytes_read = 0;
    memset(buffer, '\0', sizeof(buffer));
    printf("Process%d opening FIFO O_RDONLY\n", getpid());
    pipe_fd = open(FIFO_NAME, open_mode);
    printf("Process%d result%d\n", getpid(), pipe_fd); if
    (pipe_fd != -1) {
        do {
            res = read(pipe_fd, buffer, BUFFER_SIZE);
            bytes_read += res;
        } while (res > 0);
        (void) close(pipe_fd);
    }
    else {
        exit(EXIT_FAILURE);
    }
    printf("Process%d finished, %d bytes read\n", getpid(), bytes_read);
    exit(EXIT_SUCCESS);
}
```

Both *fifo1.c* and *fifo2.c* programs use the FIFO in blocking mode.

First *fifo1.c* is executed. It blocks and waits for reader to open the named pipe. Now writer unblocks and starts writing data to pipe. At the same time, the reader starts reading data from the pipe.

4.5 Unnamed pipes (Anonymous Pipes)

Anonymous pipes don't have names, therefore they can be used only between related processes which can inherit the file handles (file descriptors).



Anonymous pipes are typically used to "pipe" two programs: standard output from one program is redirected to the pipe input (write handle), while the standard input of the second program is redirected to from the pipe output (read handle). The pipe is created by the parent (usually the login shell), and the pipe handles are passed to children through the inheritance mechanism.

Anonymous pipes cannot be used across a network. Also, anonymous pipes are unidirectional—in order to communicate two related processes in both directions, two anonymous pipes must be created.

Example of Win32 anonymous pipes used for program piping:

```

//*****
//This program implements piping of programs p1.exe and p2.exe
//through an anonymous pipe. The program creates two child processes
//(which execute images p1.exe and p2.exe) and a pipe, then passes
//the pipe handles to the children.
//
//The program is invoked as: pipep1 p2 (no command line arguments)
//*****
#include <windows.h>
#include <iostream.h>
int main(int argc, char* argv[])
{
    //Create an anonymous (unnamed) pipe
    SECURITY_ATTRIBUTES sa;
    sa.nLength = sizeof(SECURITY_ATTRIBUTES);
    sa.lpSecurityDescriptor = 0;
    sa.bInheritHandle = TRUE; //Handles are inheritable (default is FALSE)
    HANDLE rh, wh;           //Read and write handles of the pipe
    if (!CreatePipe(&rh, &wh, &sa, 0))
    {
        cout << "Couldn't create pipe" << GetLastError() << endl; return
        (1);
    }
    // Create the first child process p1
    PROCESS_INFORMATION pi1;
    STARTUPINFO si1;
    GetStartupInfo(&si1); //Get default startup structure
    si1.hStdInput = GetStdHandle(STD_INPUT_HANDLE);
    si1.hStdOutput = wh; //Std output of p1 is input to the pipe
    si1.dwFlags = STARTF_USESTDHANDLES;
    CreateProcess( argv[1],
                  //Name of the p1's image (without ".exe.") "0,0,
0,
    TRUE, //Each open inheritable handle of the
        //parent will be inherited by the child
0,0,0,
    &si1, &pi1);
    CloseHandle(wh); //Pipe handle no longer needed
    //Create the second child process p2

```

```

PROCESS_INFORMATION pi2;
STARTUPINFO si2;
GetStartupInfo(&si2);          // Get default startup structure
si2.hStdInput = rh;             // Stdinput of p2 is output from the pipe
si2.hStdOutput = GetStdHandle(STD_OUTPUT_HANDLE);
si2.dwFlags = STARTF_USESTDHANDLES;
CreateProcess( 0,argv[2],        // Name of the p1's image (without ".exe.")
TRUE,                                // Each open inheritable handle of the
                                    // parent will be inherited by the child
0,0,0,
&si2,&pi2);
WaitForSingleObject(pi1.hProcess,INFINITE);
CloseHandle(pi1.hProcess);
WaitForSingleObject(pi2.hProcess,INFINITE);
CloseHandle(pi2.hProcess);
CloseHandle(rh);
return(0);
}

```

Comment:

In order to communicate two processes (**P1** and **P2**) through anonymous pipes by redirecting the standard I/O, the processes don't have to be aware of the existence of pipes, i.e. their sources and images don't have to be modified.

4.8 Pipe processing: (popen & pclose library functions)

The process of passing data between two programs can be done with the help of `popen()` and `pclose()` functions.

```

#include <stdio.h>
FILE *popen(const char *command,
const char *open-mode);
int pclose(FILE *stream_to_close);

```

popen():

The `popen` function allows a program to invoke another program as a new process and either write the data to it or to read from it. The parameter `command` is the name of the program to run. The `open_mode` parameter specifies in which mode it is to be invoked, it can be only either "r" or "w". On failure `popen()` returns a NULL pointer. If you want to perform bi-directional communication you have to use two pipes.

pclose():

By using `pclose()`, we can close the file stream associated with `popen()` after the process started by it has been finished. The `pclose()` will return the exit code of the process, which is to be closed. If the process was already executed a `wait` statement before calling `pclose`, the exit status will be lost because the process has been finished. After closing the file stream, `pclose()` will wait for the child process to terminate.

Messagequeue:

This is an easy way of passing message between two process. It provides a way of sending a *block of data* from one process to another. The main advantage of using this is, each block of data is considered to have a type, and a receiving process receives the blocks of data having different type values independently.

Creation and accessing of a message queue:

You can create and access a message queue using the `msgget()` function.

```
#include<sys/msg.h>
```

```
int msgget(key_t key, int msgflg);
```

The first parameter is the key value, which specifies the particular message queue. The special constant `IPC_PRIVATE` will create a private queue. But on some Linux systems the message queue may not actually be private.

The second parameter is the flag value, which takes nine permission flags.

Adding a message:

The `msgsnd()` function allows to add a message to a message queue.

```
#include<sys/msg.h>
```

```
int msgsnd(int msqid, const void *msg_ptr, size_t msg_sz, int msgflg);
```

The first parameter is the message queue identifier returned from a `msgget` function.

The second parameter is the pointer to the message to be sent. The third parameter is the size of the message pointed to by `msg_ptr`. The fourth parameter, is the flag value controls what happens if either the current message queue is full or within the limit. On success, the function returns 0 and a copy of the message data has been taken and placed on the message queue, on failure -1 is returned.

Retrieving a message:

The `msgrcv()` function retrieves message from the message queue.

```
#include<sys/msg.h>
```

```
int msgrcv(int msqid, const void *msg_ptr,
            size_t msg_sz, long int msgtype, int msgflg);
```

The second parameter is a pointer to the message to be received.

The fourth parameter allows a simple form of reception priority. If its value is 0, the first available message in the queue is retrieved. If it is greater than 0, the first message type is retrieved. If it is less than 0, the first message that has a type the same as or less than the absolute value of `msgtype` is retrieved.

On success, `msgrcv` returns the number of bytes placed in the receive buffer, the message is copied into the user-allocated buffer and the data is deleted from the message queue. It returns -1 on error.

Controlling the message queue:

This is very similar to the control function of shared memory.

```
#include<sys/msg.h>
intmsgctl(intmsgid,intcommand,
struct msgid_ds *buf);
```

Thesecondparametertakes the values as given below:

- 1.) **IPC_STAT**-Setsthe data in the msgid_ds to reflect the values associated with the message queue.
- 2.) **IPC_SET**-If the process has the permission to do so, this sets the values associated with the message queue to those provided in the msgid_ds data structure.
- 3.) **IPC_RMID**-Deletesthe message queue.

(Note:If the message queue is deleted while the process is writing in a msgsnd or msgrcv function, the send or receive function will fail.

Client/server Example:

```
//msgq1.c
#include<stdlib.h>
#include<stdio.h>
#include<string.h>
#include<errno.h>
#include<unistd.h>

#include<sys/msg.h>struct
t my_msg_st
{
long int my_msg_type;
char some_text[BUFSIZ];
};
int main()
{
intrunning=1;
int msgid;
struct my_msg_st some_data;
long int msg_to_receive = 0;
msgid = msgget( (key_t)1234,
0666 | IPC_CREAT);
if(msgid== -1)
{
fprintf(stderr,"failed to get:\n"); exit(EXIT_FAILURE);
}

while (running)
{
if(msgrcv(msgid,(void *)&some_data,
```

```

{
fprintf(stderr,"failedtoreceive:\n");
exit(EXIT_FAILURE);
}

printf("You Wrote: %s",
some_data.some_text);
if(strncmp(some_data.some_text,"end",3)
==0)
{
running=0;

}
}
if(msgctl(msgid,IPC_RMID,0)==-1)
{
fprintf(stderr,"failedtodelete\n");
exit(EXIT_FAILURE);
}
exit(EXIT_SUCCESS);
}

```

//msgq2.c

```

#include <stdlib.h>
#include <stdio.h>
#include <string.h>
#include <errno.h>
#include <unistd.h>
#include <sys/msg.h>
#define MAX_TEXT 512

struct my_msg_st
{
longint my_msg_type;
char some_text[MAX_TEXT];
};

int main()
{
intrunning=1;

struct my_msg_st some_data;
int msgid;
char buffer[BUFSIZ];

msgid=msgget((key_t)1234,
0666 | IPC_CREAT);
if(msgid==-1)

```

```

fprintf(stderr,"failed to create:\n");
exit(EXIT_FAILURE);
}
while(running)
{
printf("Enter Some Text: ");
fgets(buffer, BUFSIZ, stdin);
some_data.my_msg_type = 1;
strcpy(some_data.some_text,buffer);

if(msgsnd(msgid,(void*)&some_data,MAX_TEXT,0)==-1)
{
fprintf(stderr,"msgsnd failed\n");
exit(EXIT_FAILURE);
}
if(strncmp(buffer,"end", 3)==0)
{
running=0;
}
}
exit(EXIT_SUCCESS);
}

```

The *msgq1.c* program will create the message queue using *msgget()* function. The *msgid* identifier is returned by the *msgget()*. The message are received from the queue using *msgrcv()* function until the string "end" is encountered. Then the queue is deleted using *msgctl()* function.

The *msgq2.c* program uses the *msgsnd()* function to send the entered text to the queue.

Semaphore:

While we are using threads in our programs in multi-user systems, multiprocessing system, or a combination of two, we may often discover critical sections in the code. This is the section where we have to ensure that a single process has exclusive access to the resource.

For this purpose the semaphore is used. It allows in managing the access to resource.

To prevent the problem of one program accessing the shared resources simultaneously, we are in

need to generate and use a token which guarantees the access to only one thread of execution in the critical section at a time.

It is counter variable, which takes only the positive numbers and upon which programs can only act atomically. The positive number is the value indicating the number of units of the shared resources are available for sharing.

The common form of semaphore is the *binary semaphore*, which will control a single resource, and its value is initialized to 0.

Creation of semaphore:

The `shmget()` function creates a new semaphore or obtains the semaphore key of an existing semaphore.

```
#include<sys/sem.h>
int shmget(key_t key, int num_sems,
int sem_flags);
```

The first parameter, `key`, is an integral value used to allow unrelated process to access the same semaphore. The semaphore key is used only by `shmget`. All others use the identifier returned by `semget()`. There is a special key value `IPC_PRIVATE` which allows to create the semaphore and to be accessed only by the creating process.

The second parameter is the number of semaphores required, it is almost always 1. The third parameter is the set of flags. The nine bits are the permissions for the semaphore.

On success it will return a positive value which is the identifier used by the other semaphore functions. On error, it returns -1.

Changing the value:

The function `semop()` is used for changing the value of the semaphore.

```
#include<sys/sem.h>
int semop(int sem_id, struct sembuf
*sem_ops, size_t num-sem_ops);
```

The first parameter is the `shm_id` is the identifier returned by `shmget()`.

The second parameter is the pointer to an array of structure. The structure may contain at least the following members:

```
struct sembuf{
short sem_num;
short sem_op;
short sem_flg;
}
```

The first member is the semaphore number, usually 0 unless it is an array of semaphore. The `sem_op` is the value by which the semaphore should be changed. Generally it takes -1, which is operation to wait for a semaphore and +1, which is the operation to signal the availability of semaphore.

The third parameter, is the flag which is usually set to `SET_UNDO`. If the process terminates without releasing the semaphore, this allows to release it automatically.

Controlling the semaphore:

The `semctl()` function allows direct control of semaphore information.

```
#include<sys/sem.h>
int semctl(int sem_id, int sem_num,
int command, .../*union semun arg*/);
```

The third parameter is the command, which defines the action to be taken. There are two common values:

- 1.) **SETVAL**: Used for initializing a semaphore to a known value.
- 2.) **IPC_RMID**: Deletes the semaphore identifier.

File locking with semaphores

```
//sem.c
#include <unistd.h>
#include <stdlib.h>
#include <stdio.h>
#include
<sys/sem.h>#include<sys
/ipc.h>
#include<sys/types.h>

union semun
{
int val;
struct semid_ds *buf;
unsigned short *array;
};

static void del_semvalue(void);
static int set_semvalue(void);
static int semaphore_p(void);
static int semaphore_v(void);
static int sem_id;
//-----

static int set_semvalue()
{
union semun sem_union;
sem_union.val = 1;
if(semctl(sem_id, 0, SETVAL, sem_union) == -1) return(0); return(1);
}
//-----
static void del_semvalue()
{
union semun sem_union;
if(semctl(sem_id, 0, IPC_RMID, sem_union) == -1)
fprintf(stderr, "Failed to delete semaphore\n");
}
//-----
static int semaphore_p()
{
struct sembuf sem_b;
sem_b.sem_num = 0;
```

```

sem_b.sem_flg= SEM_UNDO;
if(semop(sem_id,&sem_b,1)== -1)
{
fprintf(stderr, "semaphore_p failed\n");
return(0);
}
return(1);
}

//-----
static int semaphore_v()
{
struct sembuf sem_b;
sem_b.sem_num = 0;
sem_b.sem_op = 1; /* V() */
sem_b.sem_flg=SEM_UNDO;
if(semop(sem_id,&sem_b,1)==-1){
fprintf(stderr, "semaphore_vfailed\n");
return(0);
}

return(1);
}

intmain(intargc,char*argv[])
{
int i;
int pause_time;
charop_char='O';
srand((unsignedint)getpid());
sem_id=semget((key_t)1234,1,0666|IPC_CREAT); if
(argc > 1)
{
if (!set_semvalue())
{
fprintf(stderr, "Failedtoinitializesemaphore\n");
exit(EXIT_FAILURE);
}
op_char='X';
sleep(2);
}
for(i=0; i<10; i++)
{
if(!semaphore_p())exit(EXIT_FAILURE);
printf("%c", op_char);
fflush(stdout);
pause_time=rand()%3;
sleep(pause_time);
printf("%c",op_char);fflush(stdout);

if(!semaphore_v())exit(EXIT_FAILURE);

```

```

pause_time=rand()%2;
sleep(pause_time);
}
printf("\n%d-finished\n",getpid()); if
(argc > 1)
{
sleep(10);
del_semvalue();
}
exit(EXIT_SUCCESS);
}

```

The function *set_semvalue()* initializes the semaphore using the *SETVAL* command in *semctl()* function. But this is to be done before the usage of semaphore.

The function *del_semvalue()* is used to delete the semaphore by using the command *IPC_RMID* in the *semctl()* function. The function *semaphore_p()* changes the semaphore value to -1, which is used to make the process to wait.

In the function *semaphore_v()*, the *semop* member of the structure *sembuf* is set to 1. By this the semaphore becomes available for the other processes because it is released.

UNIT V

SharedMemoryandSockets

SharedMemory

Kernelsupportforsharedmemory APIs
for shared memory,
Shared Memoryexample.

Sockets

IntroductiontoBerkeleySockets

IPC over a

networkClient/servermodel

SocketAddressstructures(UNIXdomain &internetdomain)

Socket system calls for connection oriented protocol and connectionless protocol

Example-client/serverprograms-singleclient/serverconnection,Multiple
simultaneous clients

Socketoptions

setsockopt

fcntlsystemcalls

ComparisionofIPC mechanisms.

SharedMemory:

Shared memory is a highly efficient way of data sharing between the running programs. It allows two unrelated processes to access the same logical memory. It is the fastest form of IPC because all processes share the same piece of memory. It also avoids copying data unnecessarily.

As kernel does not synchronize the processes, it should be handled by the user. Semaphore can also be used to synchronize the access to shared memory.

Usage of shared memory:

To use the shared memory, first of all one process should allocate the segment, and then each process desiring to access the segment should attach the segment. After accessing the segment, each process should detach it. It is also necessary to deallocate the segment without fail.

Allocating the shared memory causes virtual pages to be created. It is important to note that allocating the existing segment would not create new pages, but will return the identifier for the existing pages.

All the shared memory segments are allocated as the integral multiples of the system's page size, which is the number of bytes in a page of memory.

Unix kernel support for shared memory

- There is a shared memory table in the kernel address space that keeps track of all shared memory regions created in the system.
- Each entry of the table stores the following data:
 1. Name
 2. Creator user ID and group ID.
 3. Assigned owner user ID and group ID.
 4. Read-write access permission of the region.
 5. The time when the last process attached to the region.
 6. The time when the last process detached from the region.
 7. The time when the last process changed control data of the region.
 8. The size, in no. of bytes of the region.

UNIX APIs for shared memory

shmget

- Open and create shared memory.
- Function prototype:

```
#include <sys/types.h>
```

```
#include <sys/ipc.h>
```

```
#include <sys/shm.h>
```

```
intshmget( key_tkey,int size,int flag);
```

- Function returns a positive descriptor if it succeeds or -1 if it fails.

Shmat

- Attach shared memory to a process virtual address space.
- Function prototype:

```
#include<sys/types.h>
```

```
#include<sys/ipc.h>
```

```
#include<sys/shm.h>
```

```
void* shmat (int shmid,void *addr, int flag);
```

- Function returns the mapped virtual address of the shared memory if it succeeds or -1 if it fails.

Shmdt

- Detach shared memory from the process virtual address space.
- Function prototype:

```
#include<sys/types.h>
```

```
#include<sys/ipc.h>
```

```
#include<sys/shm.h>int
```

```
shmdt(void*addr);
```

- Function returns 0 if it succeeds or -1 if it fails.

Shmctl

- Query or change control data of shared memory or delete the memory.
- Function prototype:

```
#include<sys/types.h>
```

```
#include<sys/ipc.h>
```

```
#include<sys/shm.h>
```

```
intshmctl (int shmid,intcmd, structshmids *buf);
```

- Function returns 0 if it succeeds or -1 if it fails.

SharedmemoryExample

//shmry1.c

```
#include<unistd.h>
#include<stdlib.h>
#include<stdio.h>
#include<string.h>
#include<sys/shm.h>

#defineTEXT_SZ2048

struct shared_use_st
{
int written_by_you;
char some_text[TEXT_SZ];
};

int main()
{
intrunning=1;
void*shared_memory=(void*)0;
structshared_use_st*shared_stuff;
int shmid;
srand((unsignedint)getpid());
shmid = shmget( (key_t)1234,
sizeof(struct shared_use_st),
0666 |IPC_CREAT );

if(shmid==--1)
{
fprintf(stderr,"shmget failed\n");
exit(EXIT_FAILURE);
}
shared_memory=shmat(shmid,(void*)0,0); if
(shared_memory == (void *)-1)
{
fprintf(stderr,"shmatfailed\n");
exit(EXIT_FAILURE);
}

printf("MemoryAttachedat%x\n",
(int)shared_memory);

shared_stuff=(structshared_use_st*) shared_memory;
shared_stuff->written_by_you=0;
while(running)

{
if(shared_stuff->written_by_you)
{
```

```

printf("You Wrote: %s",
shared_stuff->some_text);

sleep(rand()%4);
shared_stuff->written_by_you= 0;

if(strncmp(shared_stuff->some_text,
"end", 3)== 0)
{
running=0;
}
}
}

```

```

if(shmdt(shared_memory) ==-1)

{
fprintf(stderr,"shmdtfailed\n");
exit(EXIT_FAILURE);
}
if(shmctl(shmid,IPC_RMID,0)==-1)
{
fprintf(stderr,"failedto delete\n");
exit(EXIT_FAILURE);
}

exit(EXIT_SUCCESS);

}

```

//shmry2.c

```

#include<unistd.h>
#include<stdlib.h>
#include<stdio.h>
#include<string.h>

```

```

#include<sys/shm.h>

```

```

#defineTEXT_SZ2048
struct shared_use_st
{
int written_by_you;
char some_text[TEXT_SZ];
};

```

```

int main()
{
intrunning=1
void*shared_memory=(void*)0;
structshared_use_st*shared_stuff;

```

```

char buffer[BUFF_SIZE];

```

```

int shmid;

                                shmid=shmget((key_t)1234,
sizeof(struct shared_use_st),
0666|IPC_CREAT);
if(shmid== -1)
{
fprintf(stderr,"shmgetfailed\n");
exit(EXIT_FAILURE);
}

shared_memory=shmat(shmid,
(void *)0, 0);
if (shared_memory==(void*)-1)
{
fprintf(stderr,"shmatfailed\n");
exit(EXIT_FAILURE);
}
printf("MemoryAttachedat%x\n",(int)shared_memory); shared_stuff
= (struct shared_use_st *)shared_memory; while(running)
{
while(shared_stuff->written_by_you==1)
{
sleep(1);
printf("waitingforclient..... \n");
}
printf("Enter Some Text: ");
fgets(buffer,BUFSIZ,stdin);
strncpy(shared_stuff->some_text,buffer,
TEXT_SZ);
shared_stuff->written_by_you= 1;
if(strncmp(buffer,"end", 3)==0)
{
running=0;
}
}
if(shmdt(shared_memory) == -1)
{
fprintf(stderr,"shmdtfailed\n");
exit(EXIT_FAILURE);
}
exit(EXIT_SUCCESS);
}

```

The *shmry1.c* program will create the segment using *shmget()* function and return the identifier *shmid*. Then that segment is attached to its address space using *shmat()* function.

The structure *share_use_st* consists of a flag *written_by_you* is set to 1 when data is available. When it is set, program reads the text, prints it and clears it to show it has read the data. The string end is used to quit from the loop. After this the segment is detached and deleted.

The `shmry2.c` program gets and attaches to the same memory segment. This is possible with the help of same key value 1234 used in the `shmget()` function. If the `written_by_you` text is set, the process will wait until the previous process reads it. When the flag is cleared, the data is written and sets the flag. This program too will use the string "end" to terminate. Then the segment is detached.

5.2 Sockets

A *socket* is a bidirectional communication device that can be used to communicate with another process on the same machine or with a process running on other machines. Sockets are the only interprocess communication we'll discuss in this chapter that permit communication between processes on different computers. Internet programs such as Telnet, rlogin, FTP, talk, and the World Wide Web use sockets.

For example, you can obtain the WWW page from a Web server using the Telnet program because they both use sockets for network communications. To open a connection to a WWW server at `www.codesourcery.com`, use `telnet www.codesourcery.com 80`. The magic constant 80 specifies a connection to the Web server programming running `www.codesourcery.com` instead of some other process. Try typing `GET /` after the connection is established. This sends a message through the socket to the Web server, which replies by sending the home page's HTML source and then closing the connection—for example:

```
%telnetwww.codesourcery.com80
Trying 206.168.99.1...
Connected to merlin.codesourcery.com (206.168.99.1).
Escape character is '^]'.
GET/
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
```

...

3. Note that only Windows NT can create a named pipe; Windows 9x programs can form only client connections.

4. Usually, you'd use telnet to connect a Telnet server for remote logins. But you can also use telnet to connect to a server of a different kind and then type comments directly at it.

Introduction to Berkeley sockets

Berkeley sockets (or BSD sockets) is a computing library with an application programming interface (API) for internet sockets and Unix domain sockets, used for inter-process communication (IPC).

This list is a summary of functions or methods provided by the Berkeley sockets API library:

- `socket()` creates a new socket of a certain socket type, identified by an integer number, and allocates system resources to it.
- `bind()` is typically used on the server side, and associates a socket with a socket address structure, i.e. a specified local port number and IP address.
- `listen()` is used on the server side, and causes a bound TCP socket to enter listening state.
- `connect()` is used on the client side, and assigns a free local port number to a socket. In case of a TCP socket, it causes an attempt to establish a new TCP connection.

- `accept()` is used on the server side. It accepts a received incoming attempt to create a new TCP connection from the remote client, and creates a new socket associated with the socket address pair of this connection.
- `send()` and `recv()`, or `write()` and `read()`, or `sendto()` and `recvfrom()`, are used for sending and receiving data to/from a remote socket.
- `close()` causes the system to release resources allocated to a socket. In case of TCP, the connection is terminated.
- `gethostbyname()` and `gethostbyaddr()` are used to resolve hostnames and addresses. IPv4 only.
- `select()` is used to spend, waiting for one or more of a provided list of sockets to be ready to read, ready to write, or that have errors.
- `poll()` is used to check on the state of a socket in a set of sockets. The set can be tested to see if any socket can be written to, read from or if an error occurred.
- `getsockopt()` is used to retrieve the current value of a particular socket option for the specified socket.
- `setsockopt()` is used to set a particular socket option for the specified socket.

IP Cover a network Socket

Concepts

When you create a socket, you must specify three parameters:

- communication style,
- namespace,
- protocol.

A communication style control shows how the socket treats transmitted data and specifies the number of communication partners. When data is sent through a socket, it is packaged into chunks called *packets*. The communication style determines how these packets are handled and how they are addressed from the sender to the receiver.

Connection styles guarantee delivery of all packets in the order they were sent. If packets are lost or reordered by problems in the network, the receiver automatically requests their retransmission from the sender.

A connection-style socket is like a telephone call: The addresses of the sender and receiver are fixed at the beginning of the communication when the connection is established.

Datagram styles do not guarantee delivery or arrival order. Packets may be lost or reordered in transit due to network errors or other conditions. Each packet must be labeled with its destination and is not guaranteed to be delivered. The system guarantees only “best effort,” so packets may disappear or arrive in a different order than shipping.

A datagram-style socket behaves more like postal mail. The sender specifies the receiver’s address for each individual message.

A socket namespace specifies how *socket addresses* are written. A socket address identifies one end of a socket connection. For example, socket addresses in the “local namespace” are ordinary filenames. In “Internet namespace,” a socket address is composed of the Internet address (also known as an *Internet Protocol address* or *IP address*) of a host attached to the network and a port number. The port number distinguishes among multiple sockets on the same host. A protocol specifies how data is transmitted. Some protocols are TCP/IP, the primary networking protocols used by the Internet; the AppleTalk network protocol; and the UNIX local communication

Client-server datagram socket— example

To experiment with datagram sockets in the UNIX domain we will write a client/server application where:

- the client takes a number of arguments on its command line and sends them to the server using separate datagrams
- for each datagram received, the server converts it to uppercase and sends it back to the client
- the client prints server replies to standard output

For this to work we will need to bind all involved sockets to pathnames.

Client-server datagram socket example —protocol

```
#include <ctype.h>
#include <sys/un.h>
#include <sys/socket.h>
#include <unistd.h>
#include "helpers.h"
#define SRV_SOCK_PATH "/tmp/uc_srv_socket"
#define CLI_SOCK_PATH "/tmp/uc_cli_socket.%ld"
#define MSG_LEN 10
#include "ucproto.h"
int main( int argc , char *argv [ ] ) {
    struct sockaddr_un srv_addr, cli_addr; int
    srv_fd , i ;
    ssize_t bytes ;
    socklen_t len;
    char buf[MSG_LEN];
    if((srv_fd=socket(AF_UNIX,SOCK_DGRAM,0))<0) err_sys
    ( " socket error " ) ;
    memset(&srv_addr,0,sizeof(struct sockaddr_un)); srv_addr .
    sun_family = AF_UNIX ;
    strncpy(srv_addr.sun_path,SRV_SOCK_PATH,
    sizeof ( srv_addr . sun_path ) -1) ;
    if(access(srv_addr.sun_path,F_OK)==0) unlink (
    srv_addr . sun_path ) ;
    if(bind(srv_fd,(struct sockaddr*)&srv_addr, sizeof (
    struct sockaddr_un ) ) < 0)
    err_sys( "binderror");
    for( ; ; ){
        len=sizeof(struct sockaddr_un ) ;
        if((bytes=recvfrom(srv_fd,buf,MSG_LEN,0, (
        struct sockaddr * ) &cli_addr , &len ) ) < 1) err_sys
        ( " recvfrom error " ) ;
        printf("server received %ld bytes from %s\n", (
        long) bytes , cli_addr . sun_path ) ;
        for(i = 0; i < bytes ; i ++ )
            buf[i]=toupper((unsigned char)buf[i]); if (
            sendto ( srv_fd , buf , bytes , 0,
            (struct sockaddr*)&cli_addr,len)!=bytes) err_sys ( "
            sendto error " ) ;
    }
}
```

```
#include "ucproto.h"
int main( int argc , char *argv [ ] ) {
structsockaddr_unsrv_addr,cli_addr; int
srv_fd , i ;
size_t len ;
ssize_tbytes;
charresp[MSG_LEN]; i
f ( argc < 2)
err_quit("Usage:ucclient MSG..");
if((srv_fd=socket(AF_UNIX,SOCK_DGRAM,0))<0) err_sys
( " socket error " );
memset(&cli_addr,0,sizeof(structsockaddr_un)); cli
i_addr . sun_family = AF_UNIX ;
snprintf(cli_addr.sun_path,sizeof(cli_addr.sun_path), CLI_SOCKET_PATH, (
long) getpid ( ) );
if(bind(srv_fd,(structsockaddr*)&cli_addr, sizeof (
struct sockaddr_un ) ) == -1)
err_sys( "binderror ");
```

Notes:

theserverispersistentandprocessesonedatagramatatime,nomattertheclientprocess,i.e. there is no notion of connection messages larger than 10 bytes are silently truncated

Socketaddressstructures(UNIXdomain&Internetdomain)

UNIX domain Sockets:

We now want to give an example of stream sockets. To do so, we can longer remain in the abstract of general sockets, but we need to pick a domain. We pick the UNIX domain. In the UNIX domain, addresses are pathnames. The corresponding C structure is `sockaddr_un`:

```
struct sockadr_un {
sa_family_t sun_family; /* = AF_UNIX */
char sun_path[108]; /* socket pathname,
NULL terminated */
}
```

The field `sun_path` contains a regular pathname, pointing to a special file of type `socket(.pipe)` which will be created at bind time.

During communication the file will have no content, it is used only as a rendez-vous point between processes.

Internet-Domain Sockets

UNIX-domain sockets can be used only for communication between two processes on the same computer. *Internet-domain sockets*, on the other hand, may be used to connect processes on different machines connected by a network.

Sockets connecting processes through the Internet use the Internet namespace represented by `PF_INET`. The most common protocols are TCP/IP. The *Internet Protocol (IP)*, a low-level protocol, moves packets through the Internet, splitting and rejoining the packets, if necessary. It guarantees only “best-effort” delivery, so packets may vanish or be reordered during transport. Every participating computer is specified using a unique IP number.

The *Transmission Control Protocol (TCP)*, layered on top of IP, provides reliable connection-ordered transport. It permits telephone-like connections to be established between computers and ensures that data is delivered reliably and in order.

DNS Names

Because it is easier to remember names than numbers, the *Domain Name Service (DNS)* associates names such as `www.codesourcery.com` with computers' unique IP numbers. DNS is implemented by a worldwide hierarchy of name servers, but you don't need to understand DNS protocols to use Internet host names in your programs.

Internet socket addresses contain two parts: a machine and a port number. This information is stored in a `struct sockaddr_in` variable. Set the `sin_family` field to `AF_INET` to indicate that this is an Internet namespace address. The `sin_addr` field stores the Internet address of the desired machine as a 32-bit integer IP number. A *port number* distinguishes a given machine's different sockets. Because different machines store multibyte values in different byte orders, use `htons` to convert the port number to

network byte order. See the man page for `ip` for more information. To convert human-readable hostnames, either numbers in standard dot notation (such as `10.0.0.1`) or DNS names (such as `www.codesourcery.com`) into 32-bit IP numbers, you can use `gethostbyname`. This returns a pointer to the `struct hostent` structure; the `h_addr` field contains the host's IP number.

System Calls

Sockets are more flexible than previously discussed communication techniques. These are the system calls involving sockets:

`socket`—Creates a socket

`closes`—Destroys a socket

`connect`—Creates a connection between two sockets

`bind`—Labels a server socket with an address

`listen`—Configures a socket to accept connections

`accept`—Accepts a connection and creates a new socket for the connection. Sockets are represented by file descriptors.

Creating and Destroying Sockets

Sockets are IPC objects that allow to exchange data between processes running: either on the same machine (*host*), or on different ones over a network.

The UNIX socket API first appeared in 1983 with BSD 4.2. It has been finally standardized for the first time in POSIX.1g (2000), but has been ubiquitous to every UNIX implementation since the 80s.

The socket API is best discussed in a network programming course, which this one is *not*. We will only address enough general socket concepts to describe how to use a specific socket family: UNIX domain sockets.

Connection Oriented Protocol

Server
`socket()`
`bind()`
`listen()`
`accept()`

blocks until connection from client

`read()`

process request

`write()`

Client
`socket()`
`connect()`
`write()`

`read()`

connection establishment

data(request)

data (reply)

Connectionless Protocol

Server

socket()
bindConnectionless Protocol ()
recvfrom()

blocks until connection from client

process request

write()


Client

socket()

bind()

sendto()

recvfrom()

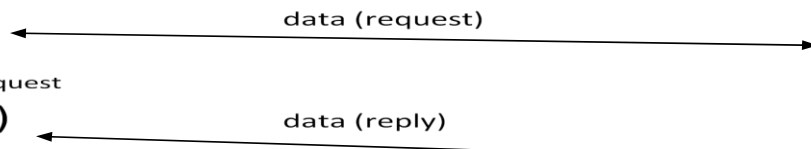

Client-server setup

Let's consider a typical client-server application scenario—no matter if they are located on the same or different hosts.

Sockets are used as follows:

each application: create a socket

idea: communication between the two applications will flow through an imaginary “pipe” that will connect the two sockets together

server: bind its socket to a well-known address

we have done the same to set up *rendez-vous* points for other IPC objects.

e.g. FIFOs

client: locates server socket (via its well-known address) and “initiate communication” with the server.

Socket options:

In order to tell the socket to get the information about the packet destination, we should call `setsockopt()`.

`setsockopt()` and `getsockopt()` - set and get options on a socket. Both methods return 0 on success and -1 on error.

Prototype: `int setsockopt(int sockfd, int level, int optname, ...`

There are two levels of socket options:

To manipulate options at the sockets API level: `SOL_SOCKET`

To manipulate options at a protocol level, that protocol number should be used;

for example, for UDP it is `IPPROTO_UDP` or `SOL_UDP` (both are equal 17); see `include/linux/in.h` and `include/linux/socket.h`

- `SOL_IP` is 0.
- There are currently 19 Linux socket options and one another option for BSD compatibility.
- There is an option called `IP_PKTINFO`.

We will set the `IP_PKTINFO` option on a socket in the following example.

```
// from /usr/include/bits/in.h
#define IP_PKTINFO 8 /* bool */
/* Structure used for IP_PKTINFO. */
```

```

struct in_pktinfo
{
    int ipi_ifindex; /* Interface index */
    struct in_addr ipi_spec_dst; /* Routing destination address */
    struct in_addr ipi_addr; /* Header destination address */
};

const int on = 1;
sockfd = socket(AF_INET, SOCK_DGRAM, 0);
if (setsockopt(sockfd, SOL_IP, IP_PKTINFO, &on,
    sizeof(on)) < 0)
    perror("setsockopt");
...
...
...
When calling recvmsg(), we will parse the msg_hdr like this:
for (cmptr = CMSG_FIRSTHDR(&msg); cmptr != NULL;
    cmptr = CMSG_NXTHDR(&msg, cmptr))
{
    if (cmptr->cmsg_level == SOL_IP && cmptr->cmsg_type == IP_PKTINFO)
    {
        pktinfo = (struct in_pktinfo *) CMSG_DATA(cmptr);
        printf("destination = %s\n", inet_ntop(AF_INET, &pktinfo->ipi_addr, str,
            sizeof(str)));
    }
}

```

In the kernel, this calls *ip_cmsg_rcv()* in *net/ipv4/ip_sockglue.c* (which eventually calls *ip_cmsg_rcv_pktinfo()*).

• You can in this way retrieve other fields of the IP header:

For getting the TTL:

- `setsockopt(sockfd, SOL_IP, IP_RECVTTL, &on, sizeof(on)) < 0`.
- But: `cmsg_type == IP_TTL`.

For getting IP options:

- `setsockopt()` with `IP_OPTIONS`.

fcntl system calls

The **fcntl** system call provides further ways to manipulate low-level file descriptors.

```

#include <fcntl.h>

int fcntl(int fd, int cmd);
int fcntl(int fd, int cmd, long arg);

```

It can perform miscellaneous operations on open file descriptors. The

call,

```

fcntl(fd, F_DUPFD, newfd);

```

returns a new file descriptor with a numerical value equal to or greater than the integer **newfd**. The call,

```
fcntl(fildes, F_GETFD)
```

returns the file descriptor flags as defined in **fcntl.h**. The

call,

```
fcntl(fildes, F_SETFD, flags)
```

is used to set the file descriptor flags, usually just **FD_CLOEXEC**. The

calls,

```
fcntl(fildes, F_GETFL)
fcntl(fildes, F_SETFL, flags)
```

respectively get and set the file status flags and access modes.

5.9 Comparison of IPC mechanisms.

IPC mechanisms are mainly 5 types

1. **pipes**: it is related data only send from one pipe output is giving to another pipe input to share resources. pipe are used drawback: it is only related process only communicated
2. **message queues**: message queues are unrelated processes also communicate with message queues.
3. **sockets**: sockets also ipc it is communicate clients and server with sockets system calls connection oriented and connectionless also
4. **PIPE**: Only two related (eg: parent & child) processes can be communicated. Data reading would be first in first out manner.
Named PIPE or FIFO: Only two processes (can be related or unrelated) can communicate. Data read from FIFO is first in first out manner.
5. **Message Queues**: Any number of processes can read/write from/to the queue. Data can be read selectively. (need not be in FIFO manner)
6. **Shared Memory**: Part of process's memory is shared to other processes. other processes can read or write into this shared memory area based on the permissions. Accessing Shared memory is faster than any other IPC mechanism as this does not involve any kernel level switching (Shared memory resides on user memory area).
7. **Semaphore**: Semaphores are used for process synchronisation. This can't be used for bulk data transfer between processes.